


# PC-based I/O Boards

## High-quality Industrial Data Acquisition and Control Products

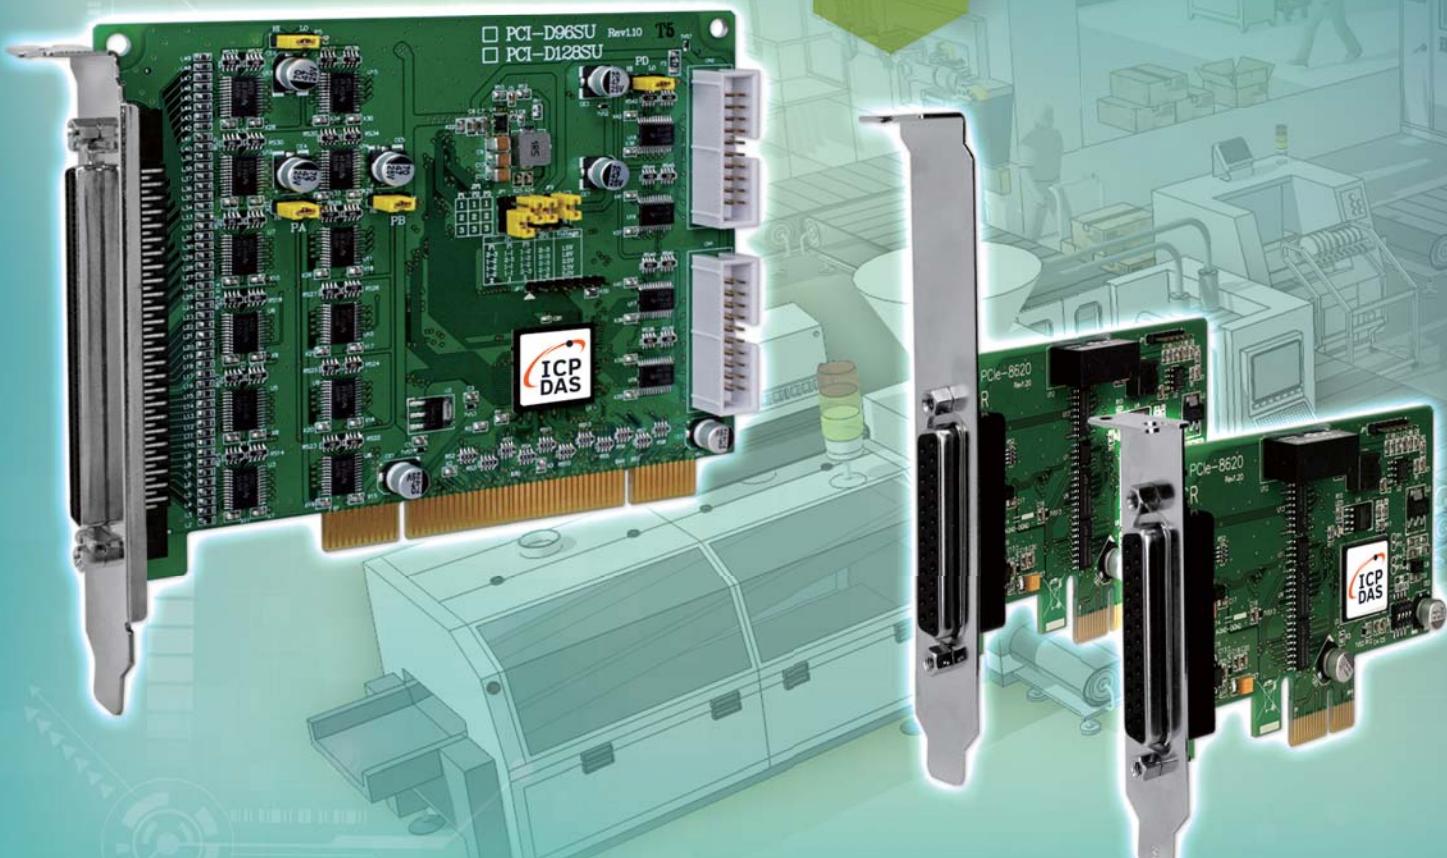

**01**  
Introduction

**02**  
PCI Express

**03**  
Universal PCI

**04**  
ISA Bus


**05**  
Special

**06**  
Accessories



# Table of Contents

## 1 Introduction



<b>1-1 Overview</b>	4
<b>1-2 Software</b>	5
<b>1-3 Applications</b>	8

## 2 PCI Express Data Acquisition Boards



<b>2-1 High Speed Multifunction Board</b>	
Selection Guide	9
PCIe-8620	10
PCIe-8622	11



<b>2-2 Multifunction Boards</b>	
Selection Guide	9
PCIe-LM4	12
PEX-1202L/1202H	14



<b>2-3 Analog Input/Output Boards</b>	
Selection Guide	9
PEX-1002L/1002H	15
PEX-DA4/DA8/DA16	16



<b>2-4 Isolated Digital I/O Boards</b>	
Selection Guide	17
PEX-P8R8i/P16R16i	18
PEX-P8POR8i/P16POR16i	19
PEX-P64/P64-24V	20
PEX-C64	21
PEX-P32C32/P32A32	22
PEX-730	23
PEX-730A	24

<b>2-5 Non-isolated Digital I/O Boards</b>	
Selection Guide	25
PEX-D24/D56	26
PEX-D48	27
PEX-D96S/	28
D144S	29

## 3 PCI Bus Data Acquisition Boards



### 3-1 High Speed Multifunction Board

Selection Guide	30
PCI-2602U	31



### 3-2 Multifunction Boards

Selection Guide	30
PCI-AD64SU	35
PCI-822LU	36
PCI-826LU	37
PCI-1802LU/1802HU	38
PCI-1800LU/1800HU	39
PCI-1602U/1602FU	40
PCI-1202LU/1202HU	41
PCI-1002LU/1002HU	42
PIO-821LU/821HU	43
PISO-813U	44



### 3-3 Analog Output Boards

Selection Guide	45
PISO-DA2U	46
PISO-DA4U/DA8U/DA16U	47
PIO-DA4U/DA8U/DA16U	48



### 3-4 Isolated Digital I/O Boards

Selection Guide	49
PISO-1730U	50
PISO-P32C32U/P32C32U-5V	51
PISO-P32A32U/P32A32U-5V	52
PISO-P32S32WU	53
PISO-P64U/P64U-24V	54
PISO-C64U/A64U	55
PISO-730U/730U-5V	56
PISO-730AU/730AU-5V	57
PCI-P8R8U/P16R16U	58
PCI-P16C16U	59
PCI-P16POR16U	60
PISO-P8R8U	61
PISO-P16R16U	62
PISO-725U	63



### 3-5 Non-isolated Digital I/O Boards

Selection Guide	64
PCI-D64HU	65
PIO-D24U/D56U	66
PIO-D48U/D48SU	67
PIO-D64H	68
PIO-D96U/D96SU	69
PIO-D144U/D144LU/D168U	70
PCI-D96SU/PCI-D128SU	71

PCI-TMC12AU

## 4 ISA Bus Data Acquisition Boards

### 4-1 Multifunction Boards



Selection Guide	73
A-826PG	74
A-823PGL/823PGH	74
A-822PGL/822PGH	74
A-821PGL/821PGH	74
A-812PG	74
A-8111	74

### 4-2 Isolated Data Acquisition Boards



Selection Guide	73
ISO-AD32L/AD32H	76
ISO-813	76
ISO-DA8/DA16	76
ISO-P64	76
ISO-C64	76
ISO-P32C32	76
ISO-P32S32WU	76
ISO-730	76
P8R8DIO/P16R16DIO	76

### 4-3 Non-isolated Data Acquisition Boards




Selection Guide	73
A-726	77
A-626	77
A-628	77
DIO-24	77
DIO-48	77
DIO-64	77
DIO-96	77
DIO-144	77

## 5 Special Function Boards

### 5-1 Memory Board



PCI-M512EU	77
------------	----

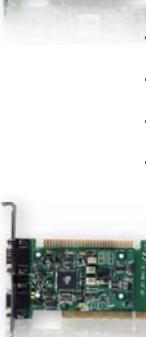

### 5-2 Counter/Frequency Board

PCI-FC16U	78
PCI-TMC12AU	79
PEX-TMC12A	80




### 5-3 Watchdog Boards

WDT-03	81
--------	----

## 6 Daughter Boards and Accessories

### 6-1 Daughter Boards (Screw Terminal Boards)



Selection Guide	82
DB-32R/DB-16P16R/DB-16P	85
DB-24P/DB-24PD/DB-16R	85
DB-24R/DB-24RD/DB-24PR	85
DB-24PRD/DB-24C	85
DB-24OD/DB-24POR	85
DB-16P8R/DB-3R	86
DB-12SSR/DB-24SSR	86
DB-24SSRDC/DB-889D	86
DB-1825/DB-8025/DB-8125	86
DB-8225/DB-8325	86
DB-8425/DB-37	87
ADP-20/ADP-37/ADP-50	87
DN-09-2/DN-09-2F	87
DN-20/DN-20-381/DN-25	87
DN-37/DN-37-381	87
DN-50/DN-50-381	87
DN-68A/DN-100	87



### 6-2 Accessories and Cables



Accessories and Cables	88
------------------------	----



## 1-1 Presentation

ICP DAS promises to satisfy you by over 200 kinds of board in one stop shopping. These boards not only cover from ISA to PCI bus that you would have often seen on your PC but even support PCI Express.

All the I/O boards are widely applied in various fields of automation systems. In brief, digital I/O boards are for monitoring and controlling logic signals such as button, switch, relay, on/off, high/low and open/close conditions, analog I/O boards are for analog signals acquisition or transmitting application, and the timer, counter and frequency boards are for pulse signals measurements.

Memory boards are so unique that you can find them only in ICP DAS. With MRAM(Magnetic Random Access Memory), data can be preserved for 10 years. Gambling machines in the casino are the main application of our memory boards.


Besides, with aid of daughter boards, each board we have mentioned above is highly expandable.

We are good at I/O measurement. Just pick one, and let our board take care of the rest! The following are the product lists. Hurry to start your tour right away!

For more details, please refer to  <https://www.icpdas.com/en/product/p02.php?root=35>

## 1-2 Software

ICP DAS provides a full-featured Software Development Kit (SDK) and reliable drivers for all our I/O boards (AD, DA, DI, DO and Timer/Counter series), with support for a variety of operating systems, such as Linux, DOS, Windows 98/NT/2000, and 32-/64-bit Windows XP/7/10. The Windows SDK for the I/O boards contain DLL (Dynamic Link Library) files, ActiveX (OCX) control components, and a large number of sample programs with source code written in Microsoft Visual C++, Visual Basic, Borland C++ Builder, Delphi, VB.NET, C#.NET Python and MATLAB. By using the SDK and the sample programs, complex hardware-register-based operations are not required, meaning that custom applications can be developed quickly and easily.

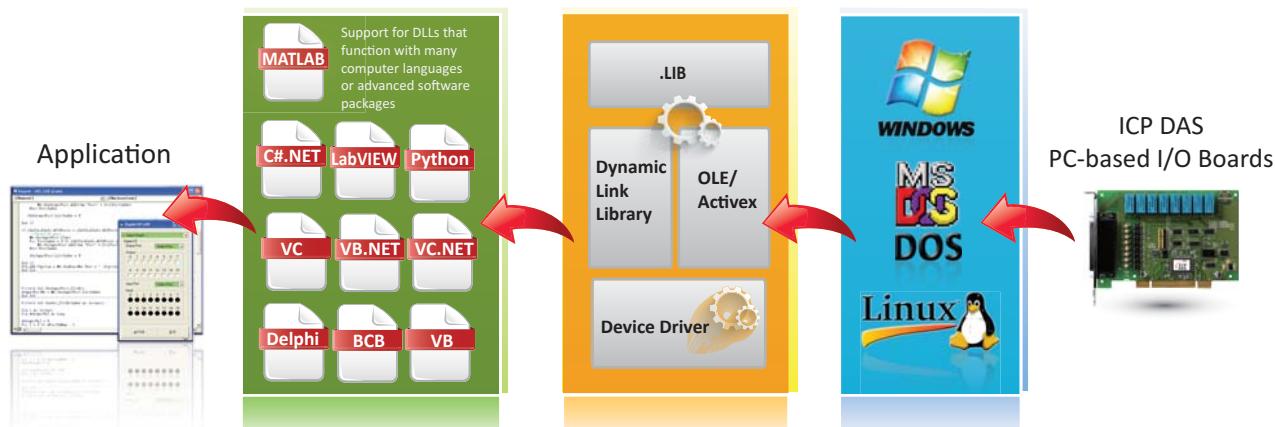


These software packages are designed so that it is easy for users to learn and use. Most contain a variety of sample programs, including the source code, that can be freely modified and used. The included shared libraries developed by ICP DAS can be distributed with no licensing fees, providing a cost-effective method for deploying custom run-time applications.

## UniDAQ Driver & SDK for Windows



UniDAQ is a uniform SDK interface that operates on the Windows OS and is used to implement common data access functionality on ICP DAS I/O boards. UniDAQ supports the majority of I/O cards based on either the PCI or Universal PCI bus in addition to future products based on the PCI Express bus. The UniDAQ SDK makes it easy to integrate different kinds of I/O boards in the same system, upgrade to new hardware, expand the number of channels in your system, and develop numerous applications based on the various I/O boards.

The UniDAQ SDK includes functions related to the Driver, Digital I/O, Interrupts, Analog I/O, Timer/Counter processes and Memory I/O, and supports both 32- and 64-bit Windows systems. Sample programs, including the source code, are also provided for a range of common programming languages, such as Microsoft Visual C++ 6.0, Microsoft Visual Basic 6.0, Borland Delphi 6.0, Borland C Builder++ 6.0, Microsoft Visual Basic .NET, Microsoft Visual C#.NET, LabVIEW, Python and MATLAB.

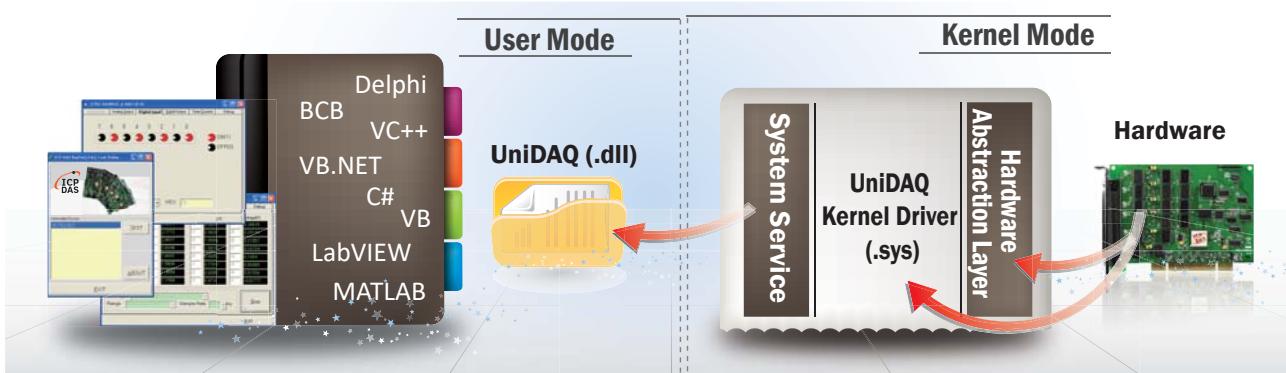


### Get Ready for Windows 10 >>>

Windows 10 is the latest operating system from Microsoft and ICP DAS provides both 32-bit and 64-bit versions of the kernel drivers for most of its DAQ cards, meaning that you can take advantage of the new Windows 10 functionality. UniDAQ also supports 64-bit extended versions of Windows XP and Windows Server 2003 systems, including both AMD64 and Intel x86-64 system architecture.

### .NET Support >>>

For .NET programmers who require direct calling of UniDAQ DLL libraries, ICP DAS provides sample programs for C# and Visual Basic .NET that can help to speed up the development of custom applications in Microsoft Visual Studio .NET.

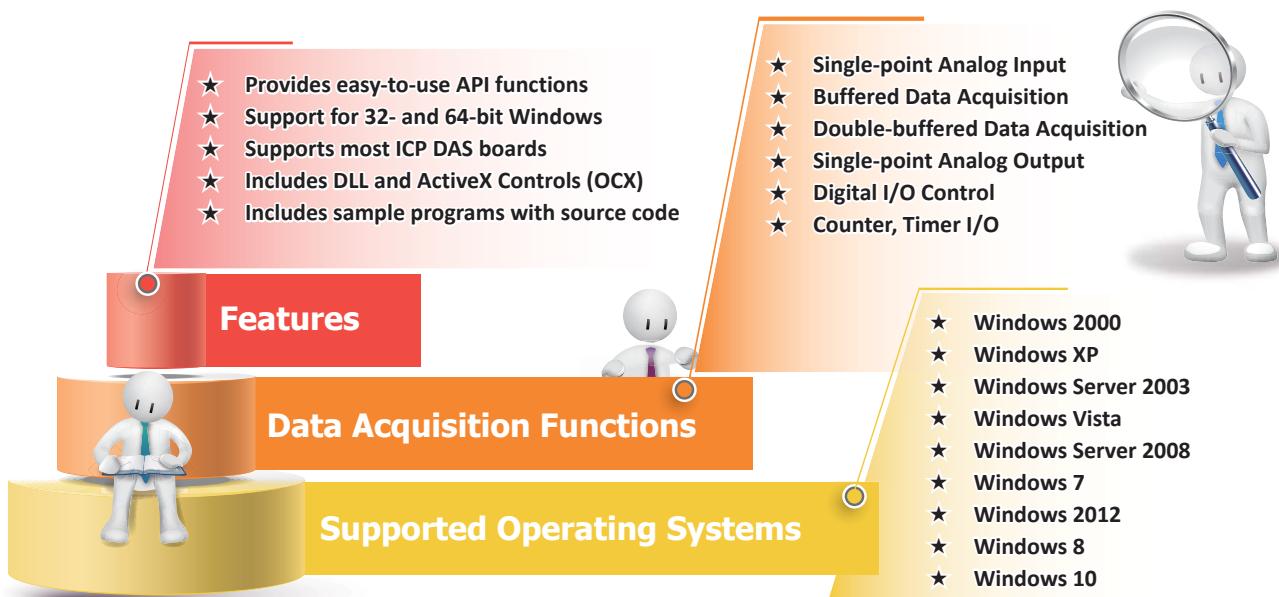

## Activex Control (OCX)

1


2

Introduction



ActiveX Control (OCX) is a software component standard introduced by Microsoft to allow easy and user-friendly program development. Any OCX control can be inserted into an application so that the properties, methods and events provided by the object can be used to develop custom applications without needing to understand how it actually works. The ICP DAS OCX supports Windows 98/NT/2000 and 32-bit Windows XP, and sample programs with source code are also provided for VB, VC, Delphi, and BCB, etc. With this OCX, users from a variety of backgrounds and expertise can bring their creativity to any kind of application.

The ICP DAS OCX communicates with PCI, ISA, PCI Express cards and DCON series modules to perform digital, analog and timer/counter operations, and is designed to minimize the need to manipulate the hardware details, meaning that data acquisition operations can be achieved using only a few lines of code. The following figure illustrates the programming system architecture for the ActiveX Control (OCX) component.

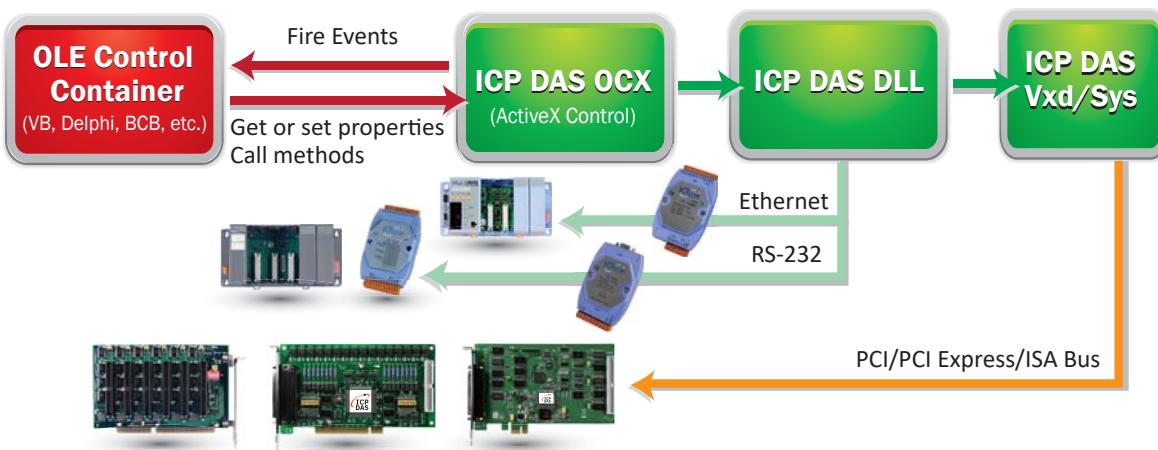

## Driver & SDK for Linux




One of the major benefits of using the Linux operating system is the huge level of support provided by the open source development community. Linux has a well-deserved reputation for stability and flexibility, together with no licensing fees or use-restrictions to speak of, meaning that Linux is an ideal operating environment. As Linux has continued to gain ground in industry and enterprise applications, ICP DAS provides drivers and libraries to enable users to take advantage of Linux for their industry control projects.

The Linux operating system has been widely adopted by many users in numerous industrial applications because of its stability, and the fact that it is open source and is free. The I/O Boards driver for Linux supports x86 32-bit and 64-bit Linux distributions with Linux Kernel 2.6.x to 3.x.x (for examples, Fedora Core, Ubuntu, OpenSUSE, etc.) and the SDK includes libraries and sample programs with source code. Users can develop I/O control applications on Linux easily by the SDK and GNU C Language.

### Features >>>

- Supports x86 32/64-bit Linux OS with Linux Kernel 2.6.x to 3.x.x
- Supports most ICP DAS ISA/PCI/PCI Express I/O series cards
- Includes Linux drivers and sample programs with source code
- Provides data acquisition functions: single-point Analog I/O, buffered data acquisition, double-buffered data acquisition, Digital I/O control and counter/timer I/O

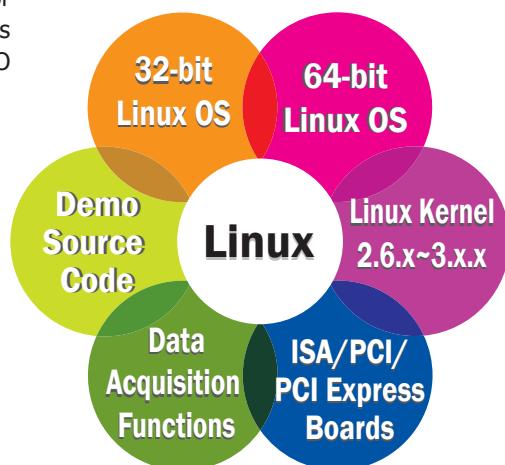




## LabVIEW



LabVIEW delivers a graphical development environment that enables data acquisition, instrumentation and control systems to be quickly created, boosting productivity and saving development time. An added advantage is that it is scalable across multiple operating systems and includes hundreds of built-in libraries.

LabVIEW provides a single development environment that allows easy access and integration with a variety of measurement and control hardware, including data acquisition devices, bench top systems and modular instruments. Hundreds of drag-and-drop control and graph options can be used to quickly create a custom GUI. In addition, custom imagery and logos can be incorporated, or the default controls can be modified, to provide a customized appearance, meaning that dynamic user interfaces can be quickly created to provide interactive control of your software system.

LabVIEW toolkit can be used with ICP DAS I/O series boards operating in a Windows 98/NT/2000 and 32-/64-bit Windows XP/7/10 environment. ICP DAS also provides an LLB Library together with sample programs, including the source code, meaning that your hardware and software can easily be integrated in the LabVIEW graphical development environment to provide data acquisition, measurement and control.

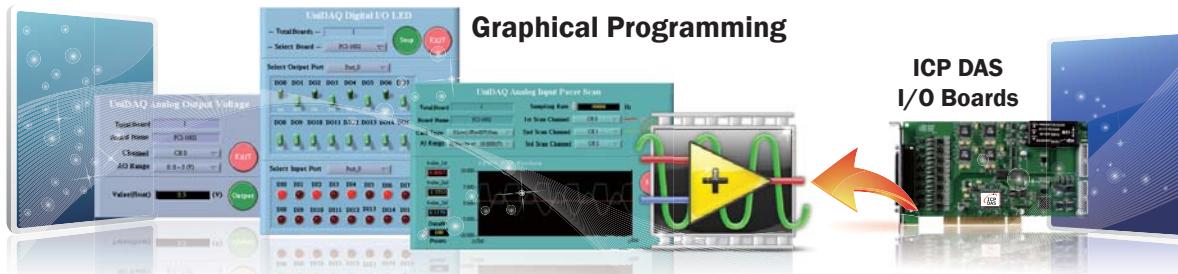

## DOS Lib



DOS includes many valuable features, such as high performance, stability, easy installation and deployment, etc., for industrial control and measurement applications.

ICP DAS continues to support DOS-based systems by providing useful function libraries and a wide variety of C sample programs, including the source code, which can be freely modified and used as required.

### Features >>>

- Useful function libraries for TC/BC/MSC with a large range of modes
- Wide variety of sample programs for TC/BC/MSC, including source code
- Integrated diagnostics application
- Complete functions descriptions
- Easy to learn and use
- No licensing fees for shared libraries




```
Command Prompt - bc t2.c
File Edit Search Run Compile Debug Project Options Window Help
TEST.C T2.C
[1] #include <stdio.h>
#include <stdlib.h>
#include <math.h>
#include <dos.h>
#include "f:\liming\~1\project\iso\c\da\v20\new_io.h"
#define PI 3.1415926
#define SAMPLE_RATE 800
#define OK 1 /* No error return */
#define ERROR -1 /* Error return */
#define QUIT -2
1:1 ==
```

## 1-3 Applications

1

2

Introduction

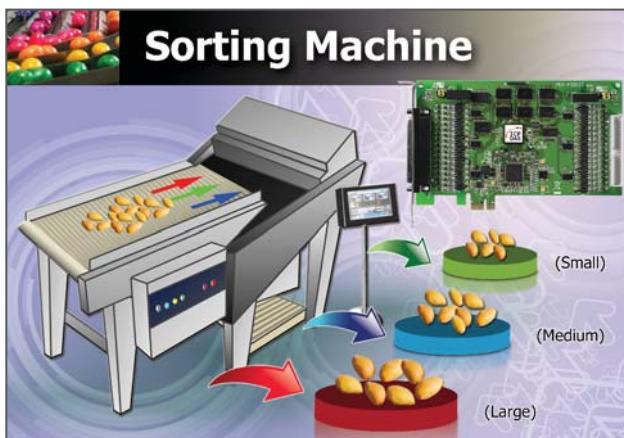

# 2. PCI Express Data Acquisition Boards

0110110  
0011011  
1001011

2

1

PCI Express Data Acquisition Boards



## Multifunction and Analog Output Board Selection Guide

2-1 High Speed Multifunction Board			2-2 Multifunction Board		2-3 Analog Input/Output Board			
Model	PCIe-8620	PCIe-8622	PCIe-LM4	PEX-1202L	PEX-1202H	PEX-1002L	PEX-1002H	PEX-DA4/DA8/DA16
Interface								
<b>Analog Input</b>								
Isolation Voltage	2500 VDC		-	-		-		-
Resolution	16-bit		24-bit	12-bit		12-bit		-
Channels	8 SE	16 SE	4 differential (General) 4 (Load Cell Transducer)	32 SE/16 Diff.		32 SE/16 Diff.		-
Sampling Rate	200 kS/s (Per Channel)		15 kS/s	110 kS/s	44 kS/s	110 kS/s	44 kS/s	-
Bipolar Input	±5 V, ±10 V	±5 V, ±10 V	±227 mV (Load Cell Transducer) ±10 V, ±5 V, ±2.5 V, ±1.25 V (General)	±0.625 V, ±1.25 V, ±2.5 V, ±5 V, ±10 V	±0.005 V, ±0.01 V, ±0.05 V, ±0.1 V, ±1 V, ±5 V, ±10 V	±1.25 V, ±2.5 V, ±5 V, ±10 V	±0.01 V, ±0.1 V, ±1 V, ±10 V	-
Unipolar Input	-	-	-	0 ~ +10 V, 0 ~ +5 V, 0 ~ +2.5 V, 0 ~ +1.25 V	0 ~ +10 V, 0 ~ +0.1 V, 0 ~ +0.01 V	-	-	-
FIFO Size	2 K	2 K	-	1 K		-		-
Accuracy	0.05% of FSR ±1 LSB @ 25°C, ±10 V			0.01% of FSR ±1 LSB @ 25°C, ±10 V		0.01% of FSR ±1 LSB @ 25°C, ±10 V		-
<b>Analog Output</b>								
Resolution	-	16-bit	16-bit	12-bit		-		14-bit
Channels	-	2	2	2		-		4/8/16
Accuracy	-	±10 LSB	±10 LSB	0.06% of FSR ± 1 LSB @ 25°C, ±10 V		-		0.04% of FSR ±2 LSB @ 25°C, ±10 V
Output Range	-	±5 V, ±10 V	±5 V, ±10 V	±5 V, ±10 V		-		Voltage: ±10 V Current: 0 ~ +20 mA
Slew Rate	-	2.8 V/µs	2.8 V/µs	8.33 V/µs		-		0.71 V/µs
<b>Non-isolated Digital Input/Output</b>								
DI Channels	-	-	-	16 (5 V/TTL)		16 (5 V/TTL)		16 (5 V/TTL)
DO Channels	-	-	-	16 (5 V/TTL)		16 (5 V/TTL)		16 (5 V/TTL)
<b>Isolated Digital Input/Output</b>								
DI Channels	4	12	16	-		-		-
DO Channels	4	12	16	-		-		-
Isolation Voltage	2500 VDC	2500 VDC	2500 VDC	-		-		-
<b>Timer/Counter</b>								
Channels	-	-	-	3		3		3
Resolution	-	-	-	16-bit		16-bit		16-bit
Clock Source	-	-	-	8 MHz		4 MHz (Internal)		4 MHz (Internal)

# 2-1 High Speed Multifunction Board

## PCIe-8620

PCI Express, 200 KS/s High-speed, 16-bit, 8-channel Simultaneously Sampled Analog Input with 4-channel Isolated DI/O Board



2

1

### Features ►►►

- PCI Express x1 Interface, Full-profile or Low-profile
- 4-channel Isolated Digital Input
- 4-channel Isolated Digital Output
- 8 Single-ended Analog Input channels
  - Synchronous Sample and Hold

- Analog Input Range: ±10 V, ±5 V
- 16-bit, 200 KS/s Sampling Rate for each channel
- Hardware FIFO for Analog Input with a total of 2048 Samples
- Built-in MagicScan Controller

### Introduction

The PCIe-8620 is a bus-type, isolated high-speed Analog Input board with isolated DI/O. The simultaneously sampled AD offers a mix of up to 8 single-ended 16-bit Analog Input channels with a 2 k Sample hardware FIFO. All channels feature a programmable input range of ±10 V or ±5 V with a sampling rate up to 200 KS/s per channel. The PCIe-8620 provides 4 isolated Digital Input channels and 4 isolated Digital Output channels. The isolation range of the board has been increased to 2500 Vdc, making it one of the most cost-effective solutions when considering isolated AD with DI/O boards.

PCIe-8620 also includes a second-order anti-alias analog filter where the -3 dB frequency for the ±5 V input range is typically 15 kHz, and is typically 23 kHz for the ±10 V input range.

The PCIe-8620 is a low-profile PCI Express board that is suitable for computers with limited space, and is also suitable for standard-size computers since the board is shipped with both full-height and low-profile brackets.



Full-height Bracket ▲



Low-profile Bracket ▲



**Pin Assignments**

Pin Assignment	Terminal No.	Pin Assignment
AD0	01	14 AGND
AD1	02	15 AGND
AD2	03	16 AGND
AD3	04	17 AGND
AD4	05	18 AGND
AD5	06	19 AGND
AD6	07	20 AGND
AD7	08	21 DGND
DGND	09	22 DINO
DIN1	10	23 DIN2
DIN3	11	24 DOUT0
DOUT1	12	25 DOUT2
DOUT3	13	
		CON1

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10

#### Sample Programs

- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications

#### Analog Input

Isolation Voltage	2500 Vdc (Bus-type)
Channels	8 Single-ended
Resolution	16-bit
Sampling Rate	200 KS/s (Each Channel)
Bipolar Input	±10 V, ±5 V
FIFO Size	2 K Samples (Total)
Accuracy	0.05% of FSR ±1 LSB @ 25°C, ±10 V

#### Digital Input

Channels	4
Isolation Voltage	2500 Vdc

#### Digital Output

Channels	4
Isolation Voltage	2500 Vdc

#### General


Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female DB25 x 1
Dimensions (L x W x D)	Full-profile: 107 mm x 120 mm x 22 mm Low-profile: 107 mm x 80 mm x 22 mm
Power Consumption	500 mA @ +3.3 V; 200 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Ordering Information

PCIe-8620 CR	PCI Express, 200 KS/s, 16-bit, 8-ch Simultaneously Sampled Analog Input Board and 4-ch Isolated DI/O (RoHS). Includes one CA-PC25M D-sub Connector and one Low-profile Bracket.
--------------	---

## PCIe-8622

**PCI Express, 200 KS/s High-speed, 16-bit, 16-channel Simultaneously Sampled Analog Input with 12-channel Isolated DI/O Board**

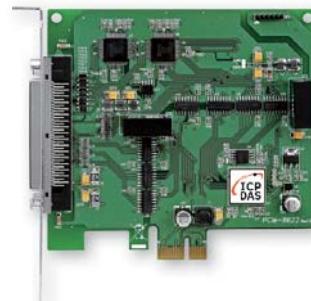

### Features ►►►

- PCI Express x1 Interface, Full-profile
- 12-channel Isolated Digital Input
- 12-channel Isolated Digital Output
- 2-channel 16-bit Analog Output
- 8 Single-ended Analog Input channels
- Synchronous Sample and Hold
- Analog Input Range:  $\pm 10$  V,  $\pm 5$  V
- 16-bit, 200 kS/s Sampling Rate for each channel
- Hardware FIFO for Analog Input with a total of 2048 Samples
- Built-in MagicScan Controller

### Introduction

The PCIe-8622 is a bus-type, isolated high-speed AD multifunction board with 16-bit DA and isolated DI/O. The simultaneously sampled AD offers a mix of up to 16 single-ended, 16-bit Analog Input channels with a 2 k Sample hardware FIFO and 2500 Vdc bus-typed isolation protection. All channels feature a programmable input range of  $\pm 10$  V or  $\pm 5$  V with a sampling rate up to 200 kS/s per channel.

The PCIe-8622 supports the PCI Express bus and provides 12 isolated Digital Input channels, 12 isolated Digital Output channels and 2 Analog Output channels at 16-bit resolution. The board has a single high-density connector that reduces the amount of space required for installation.

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
Output +5 V	01	35 Output +15 V
CNT1_GATE	02	36 CNT0_GATE
CNT1_OUT	03	37 CNT0_OUT
CNT1_CLK	04	38 CNT0_CLK
DGND	05	39 DGND
DOUT11	06	40 DOUT10
DOUT9	07	41 DOUT8
DOUT7	08	42 DOUT6
DOUT5	09	43 DOUT4
DOUT3	10	44 DOUT2
DOUT1	11	45 DOUT0
DIN11	12	46 DIN10
DIN9	13	47 DIN8
DGND	14	48 DGND
DIN7	15	49 DIN6
DIN5	16	50 DIN4
DIN3	17	51 DIN2
DIN1	18	52 DINO
N/A	19	53 N/A
AI_CONV	20	54 N/A
DTRG1	21	55 DTRGO
AGND	22	56 AGND
AGND	23	57 AGND
A01	24	58 A00
AGND	25	59 AGND
AGND	26	60 AGND
AI15	27	61 AI14
AI13	28	62 AI12
AI11	29	63 AI10
AI9	30	64 AI8
AI7	31	65 AI6
AI5	32	66 AI4
AI3	33	67 AI2
AI1	34	68 AI0
	CON1	

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

#### Sample Programs

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications

#### Analog Input

Isolation Voltage	2500 Vdc (Bus-type)
Channels	16 Single-ended
Resolution	16-bit
Sampling Rate	200 kS/s (Each Channel)
Bipolar Input	$\pm 10$ V, $\pm 5$ V
FIFO Size	2 k Samples (Total)
Accuracy	0.05% of FSR $\pm 1$ LSB @ 25°C, $\pm 10$ V

#### Analog Output

Channels	2
Resolution	16-bit
Output Range	$\pm 5$ V, $\pm 10$ V

#### Digital Input

Channels	12
Isolation Voltage	2500 Vdc

#### Digital Output

Channels	12
Isolation Voltage	2500 Vdc

#### Timer/Counter

Channels	2
----------	---

#### General

Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	68-pin Female SCSI II x 1
Dimensions (L x W x D)	125 mm x 120 mm x 22 mm
Power Consumption	600 mA @ +3.3 V; 250 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Ordering Information

PCIe-8622 CR	PCI Express, 200 KS/s , 16-bit, 16-ch Simultaneously Sampled Analog Input, 2-channel 16-bit Analog Output and 12-ch Isolated DI/O Board (RoHS).
--------------	---

## 2-2 Multifunction Boards

### PCIe-LM4

PCI Express, 24-bit Precision Load Cell Input Motor Board



#### Features >>>

- PCI Express x1 Interface
- Supports CardID (SMD Switch)
- 4-channel Load Cell Transducer Input
  - 24-bit ADC with Max. 15 kS/s. Sampling Rate
- 4 Differential general analog input Channels
  - 24-bit ADC with Max. 15 kS/s. Sampling Rate

- 2-axis pulse output and encoder
  - Support mode CW/CCW, Pulse/DIR and EA/EB
- 2-channel 16-bit analog output
- 16-channel Isolated Digital Input
- 16-channel Isolated Digital output

2

1

#### Introduction

The PCIe-LM4 is a powerful multifunction board based on the PCI Express. Equipped with four Load Cell (strain gauge) input channels, four general analog input channels, a 2-axis motion controller, two analog output channels, sixteen isolated digital input channels and sixteen isolated digital output channels.

The PCIe-LM4 also adds a Card ID switch. Users can set Card ID on a board and recognize the board by the ID via software when using two or more PCIe-LM4 cards in one computer.

These cards support various OS versions, such as Windows 32/64-bit Windows 7/8/10. DLL together with various language sample programs based on Visual C++, Borland Delphi, Borland C++ Builder, Visual Basic, C#.NET, Visual Basic.NET and LabVIEW are provided in order to help users quickly and easily develop their own applications.



#### Hardware Specifications

Load Cell Input	
Channels	4
A/D Converter	24-bit, 67 µs conversion time
Sampling Rate	15 kS/s
Overvoltage Protection	Continuous ±35 Vp-p
Input Impedance	10,000 MΩ/4pF
Trigger Modes	Software
Data Transfer	Polling
Excitation Voltage	10 V
Accuracy	0.05 % of FSR ±1 LSB @ 25 °C, ± 10 V
Input Range	±227 mV
Analog Input	
Channels	4 differential
A/D Converter	24-bit, 67 µs conversion time
Sampling Rate	15 kS/s
Overvoltage Protection	Continuous ±35 Vp-p
Input Impedance	10,000 MΩ/4pF
Trigger Modes	Software
Data Transfer	Polling
Accuracy	0.05 % of FSR ±1 LSB @ 25 °C, ± 10 V
Input Range	±10 V, ±5 V, ±2.5 V, ±1.25 V
Analog Output	
Channels	2
Resolution	16-bit
Accuracy	±10 LSB
Output Range	±10 V, ±5 V
Output Driving	±5 mA
Slew Rate	2.8 V/µs
Output Impedance	0.1 Ω (Max.)
Operating Mode	Static update, Waveform generation
Output Rate	500 kS/s (Max.)
FIFO Size	512 Samples
Pulse Output	
Channels	2
Mode	CW/CCW, PULSE/DIR
Frequency	4 MHz (Max.)
Pulse Counter	32-bit for each channel
Isolation Voltage	3 kVrms

Encoder Input	
Channels	2
Mode	CW/CCW, PULSE/DIR, A/B PHASE
Frequency	12 MHz
Pulse Counter	32-bit for each channel
Isolation Voltage	3 kVrms
Digital Input	
Channels	16
Isolation Voltage	2500 VDC
Compatibility	Sink or Source, Photo coupler isolated channel with common power or ground
Input Voltage	Logic 0: 0 ~ 1 V Logic 1: 5 ~ 24 V
Input Impedance	10 KΩ
Response Speed	4 kHz (Typical)
Trigger Mode	Software
Data Transfer	Polling
Digital Output	
Channels	16
Isolation Voltage	2500 VDC
Compatibility	Sink, Open Drain
Output Capability	100 mA/+30 V for each channel @ 100% duty
Operation Mode	Static update
Response Speed	4.0 kHz (Typical)
General	
Bus Type	PCI Express x 1
Data Bus	32-bit
Card ID	Yes (4-bit)
I/O Connector	SCSI VHDCI 68-pin x 2
Dimensions (L x W x D)	187 mm X 101 mm X 22 mm
Power Consumption	1 A @ +5 V (Max.)
Operating Temperature	0 ~ 60 °C
Storage Temperature	-20 ~ 70 °C
Humidity	5 ~ 85% RH, non-condensing



## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

### Sample Programs

DOS Lib and TC Demo

LabVIEW Demo

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	
		IO	IO
N.C.	01	35	N.C.
N.C.	02	36	N.C.
N.C.	03	37	N.C.
N.C.	04	38	N.C.
N.C.	05	39	N.C.
AGND	06	40	AGND
AGND	07	41	AGND
AGND	08	42	AGND
AGND	09	43	AGND
V00	10	44	AGND
AGND	11	45	AGND
V01	12	46	AGND
AGND	13	47	AGND
AI4+	14	48	AI4-
AI5+	15	49	AI5-
AI6+	16	50	AI6-
AI7+	17	51	AI7-
AGND	18	52	AGND
N.C.	19	53	N.C.
SENSE+	20	54	SENSE-
EXC+	21	55	EXC-
AI3+	22	56	AI3-
N.C.	23	57	N.C.
SENSE+	24	58	SENSE-
EXC+	25	59	EXC-
AI2+	26	60	AI2-
N.C.	27	61	N.C.
SENSE+	28	62	SENSE-
EXC+	29	63	EXC-
AI1+	30	64	AI1-
N.C.	31	65	N.C.
SENSE+	32	66	SENSE-
EXC+	33	67	EXC-
AI0+	34	68	AI0-



CON1

Pin Assignment	Terminal No.	Pin Assignment			
		Motion	IO	IO	Motion
N.C.	01	DI.COM1	01	35	DI.COM1
RDY0	02	DI0	02	36	DI1
ALM0	03	DI2	03	37	DI3
ORG0	04	DI4	04	38	DI5
PEL0	05	DI6	05	39	DI7
N.C.	06	DI.COM2	06	40	DI.COM2
RDY1	07	DI8	07	41	DI9
ALM1	08	DI10	08	42	DI11
ORG1	09	DI12	09	43	DI13
PEL1	10	DI14	10	44	DI15
N.C.	11	EXT.PWR1	11	45	EXT.GND1
E.SVON0	12	DO0	12	46	DO1
ALMRST0	13	DO2	13	47	DO3
E.SVON1	14	DO4	14	48	DO5
ALMRST1	15	DO6	15	49	DO7
N.C.	16	EXT.PWR2	16	50	EXT.GND2
N.C.	17	DO8	17	51	DO9
N.C.	18	DO10	18	52	DO11
N.C.	19	DO12	19	53	DO13
N.C.	20	DO14	20	54	DO15
N.C.	21	N.C.	21	55	N.C.
N.C.	22	N.C.	22	56	N.C.
A1+	23	N.C.	23	57	N.C.
B1+	24	N.C.	24	58	N.C.
Z1+	25	N.C.	25	59	N.C.
A2+	26	N.C.	26	60	N.C.
B2+	27	N.C.	27	61	N.C.
Z2+	28	N.C.	28	62	N.C.
CW0.P	29	N.C.	29	63	N.C.
CCW0.P	30	N.C.	30	64	N.C.
CW1.P	31	N.C.	31	65	N.C.
CCW1.P	32	N.C.	32	66	N.C.
ITR.5V	33	ITR.5V	33	67	ITR.5V
ITR.GND	34	ITR.GND	34	68	ITR.GND



CON2



## Ordering Information

PCIe-LM4 CR	PCI Express, 24-bit Precision Load Cell Input Motor Board (RoHS)
-------------	--

# PEX-1202L/PEX-1202H

PCI Express, 32-channel, 12-bit, 110 kS/s or 44 kS/s  
Multi-function (1 K word FIFO) Board



2

3

## Features ►►►

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>■ PCI Express x1 Interface</li> <li>■ 16-channel 5 V/TTL Digital Input</li> <li>■ 16-channel 5 V/TTL Digital Output</li> <li>■ Pull-high/Pull-low Jumpers for DI Channels</li> </ul> | <ul style="list-style-type: none"> <li>■ 12-bit, 32 Single-ended/16 Differential Analog Input channels</li> <li>■ Three External Triggers: Pre-trigger, Middle-trigger, Post-trigger</li> <li>■ 110 or 44 kS/s AD Sampling Rate</li> <li>■ Supports Card ID (SMD Switch)</li> </ul> |
|---|---|

## Introduction

The PEX-1202L/H series utilizes the PCI Express bus and is designed as an easy replacement for the PCI-1202 series without requiring any modification to either the software or the driver.

The PEX-1202L/H provides 32 single-ended or 16 differential Analog Input channels at 12-bit resolution, together with 16 TTL Digital Input and 16 TTL Digital Output channels. Data acquisition under DOS is gap-free and continuous, at 110 kHz for low gain and 44 kHz for high gain. The PEX-1202L/H also features "Magic Scan" and Continuous Capture functions.

The PEX-1202L/H includes a Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or line broken.



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	
AI_1	02	20 AI_16
AI_2	03	21 AI_17
AI_3	04	22 AI_18
AI_4	05	23 AI_19
AI_5	06	24 AI_20
AI_6	07	25 AI_21
AI_7	08	26 AI_22
AI_8	09	27 AI_23
AI_9	10	28 AI_24
AI_10	11	29 AI_25
AI_11	12	30 AI_26
AI_12	13	31 AI_27
AI_13	14	32 AI_28
AI_14	15	33 AI_29
AI_15	16	34 AI_30
A.GND	17	35 AI_31
Da1 out	18	
Ext_Trig	19	

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	02 DO 1
DO 2	03	04 DO 3
DO 4	05	06 DO 5
DO 6	07	08 DO 7
DO 8	09	10 DO 9
DO 10	10	12 DO 11
DO 12	12	14 DO 13
DO 14	14	16 DO 15
GND	16	18 GND
+5 V	18	20 +12 V

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	02 DI 1
DI 2	03	04 DI 3
DI 4	05	06 DI 5
DI 6	07	08 DI 7
DI 8	09	10 DI 9
DI 10	11	12 DI 11
DI 12	13	14 DI 13
DI 14	15	16 DI 15
GND	17	18 GND
+5 V	19	20 +12 V



## Ordering Information

<b>PEX-1202L CR</b>	PCI Express, 32-channel, 12-bit, 110 kS/s. Low Gain Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
---------------------	---

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Hardware Specifications

Model	PEX-1202L	PEX-1202H
<b>Analog Input</b>		
Channels	32 Single-ended/16 Differential	
Resolution	12-bit, 8.5 µs Conversion Time	
FIFO Size	1024 Samples	
Accuracy	0.1% of FSR ±1 LSB @ 25°C, ±10 V	
Sampling Rate	110 kS/s	44 kS/s
<b>Analog Output</b>		
Channels	2	
Resolution	12-bit	
Accuracy	0.06% of FSR ±1 LSB @ 25°C, ±10 V	
Output Range	±5 V, ±10 V	
<b>Digital Input</b>		
Channels	16	
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.	
Response Speed	500 kHz (Typical)	
<b>Digital Output</b>		
Channels	16	
Compatibility	5 V/CMOS	
Output Voltage	Logic 0: 0.1 V Max., Logic 1: 4.4 V Min.	
Output Capability	Sink: 6 mA @ 0.33 V, Source: 6 mA @ 4.77 V	
Response Speed	500 kHz (Typical)	
<b>Timer/Counter</b>		
Channels	3	
Resolution	16-bit	
Reference Clock	Internal: 8 MHz	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	1300 mA @ +3.3 V; 0 mA @ +12 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## 2-3 Analog Input/Output Boards

### PEX-1002L/PEX-1002H

PCI Express, 32-channel, 12-bit, 110 kS/s or 44 kS/s  
Multi-function Board



#### Features ►►►

- PCI Express x1 Interface
- 16-channel 5 V/TTL Digital Input
- 16-channel 5 V/TTL Digital Output
- Pull-high/Pull-low Jumpers for DI Channels
- 12-bit, 32 Single-ended/16 Differential Analog Input channels
- Internal/External Trigger
- 110 or 44 kS/s AD Sampling Rate
- Supports Card ID (SMD Switch)

#### Introduction

The PEX-1002L/H series utilizes the PCI Express bus and is designed as an easy replacement for the PCI-1002 series without requiring any modification to either the software or the driver.

The PEX-1002L/H provides 32 single-ended or 16 differential Analog Input channels at 12-bit resolution, together with 16 TTL Digital Input and 16 TTL Digital Output channels.

The PEX-1002L/H includes a Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or line broken.

#### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	
AI_1	02	20 AI_16
AI_2	03	21 AI_17
AI_3	04	22 AI_18
AI_4	05	23 AI_19
AI_5	06	24 AI_20
AI_6	07	25 AI_21
AI_7	08	26 AI_22
AI_8	09	27 AI_23
AI_9	10	28 AI_24
AI_10	11	29 AI_25
AI_11	12	30 AI_26
AI_12	13	31 AI_27
AI_13	14	32 AI_28
AI_14	15	33 AI_29
AI_15	16	34 AI_30
A.GND	17	35 AI_31
N.C.	18	36 N.C.
Ext_Trig	19	37 D.GND
		CON3

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	○ ○ 02 DI 1
DI 2	03	○ ○ 04 DI 3
DI 4	05	○ ○ 06 DI 5
DI 6	07	○ ○ 08 DI 7
DI 8	09	○ ○ 10 DI 9
DI 10	11	○ ○ 12 DI 11
DI 12	13	○ ○ 14 DI 13
DI 14	15	○ ○ 16 DI 15
GND	17	○ ○ 18 GND
+5 V	19	○ ○ 20 +12 V
		CON2

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	○ ○ 02 DO 1
DO 2	03	○ ○ 04 DO 3
DO 4	05	○ ○ 06 DO 5
DO 6	07	○ ○ 08 DO 7
DO 8	09	○ ○ 10 DO 9
DO 10	10	○ ○ 12 DO 11
DO 12	12	○ ○ 14 DO 13
DO 14	14	○ ○ 16 DO 15
GND	16	○ ○ 18 GND
+5 V	18	○ ○ 20 +12 V
		CON1

#### Software

##### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10  Linux

##### Sample Programs

- DOS Lib and TC/BC/MSC Demo  LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

#### Hardware Specifications

Model	PEX-1002L	PEX-1002H
<b>Analog Input</b>		
Channels	32 Single-ended/16 Differential	
Resolution	12-bit, 8 µs Conversion Time	
Accuracy	0.01% of FSR ±2 LSB @ 25°C, ±10 V	
Sampling Rate	110 kS/s	44 kS/s
<b>Digital Input</b>		
Channels	16	
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.	
Response Speed	500 kHz (Typical)	
<b>Digital Output</b>		
Channels	16	
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V	
Response Speed	500 kHz (Typical)	
<b>Timer/Counter</b>		
Channels	3	
Resolution	16-bit	
Reference Clock	Internal: 4 MHz	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	900 mA @ +3.3 V; 350 mA @ +12 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

#### Ordering Information

PEX-102L CR	PCI Express, 32-channel, 12-bit, 110 kS/s. Low Gain Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
-------------	---

PEX-1002H CR	PCI Express, 32-channel, 12-bit, 44 kS/s. High Gain Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
--------------	---

# PEX-DA4/PEX-DA8/PEX-DA16

PCI Express, 14-bit, 4/8/16-channel Analog Output Board



2

3

PCI Express Data Acquisition Boards

## Features >>>

- PCI Express x1 Interface
- 16-channel 5 V/TTL Digital Input
- 16-channel 5 V/CMOS Digital Output
- Pull-high/Pull-low Jumpers for DI Channels
- Supports Card ID (SMD Switch)

- 4, 8 or 16-channel 14-bit Analog Output
- Voltage Output:  $\pm 10$  V
- Current Output: 0 ~ +20 mA (sink)
- Double-buffered DA Latch

## Introduction

The PEX-DA4/DA8/DA16 series Analog Output boards utilize the PCI Express interface, and are equipped with 4, 8, or 16 Analog Output channels at 14-bit resolution with each DA channel featuring a double-buffered latch.

The voltage output for the PEX-DA series can range from -10 V to +10 V, and the current output range can be from 0 to 20 mA. In addition, the PEX-DA series also provides the following advantages:

**1. Accurate and easy-to-use calibration:** ICP DAS provides a software calibration function, meaning that jumpers and trim pots are no longer required. The calibration data is saved in EEPROM for long-term use.

**2. Individual channel configuration:** Each channel can be individually configured as either voltage or current output.

**3. Card ID:** The PEX-DA series includes a Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer.

The PEX-DA series is designed as an easy replacement for the PIO-DA series without requiring any modification to either the software or the driver.



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
VO_0	01	
VO_1	02	20 IO_0
VO_2	03	21 IO_1
VO_3	04	22 IO_2
A.GND	05	23 IO_3
VO_4	06	24 N/A
VO_5	07	25 IO_4
VO_6	08	26 IO_5
VO_7	09	27 IO_6
A.GND	10	28 IO_7
VO_8	11	29 N/A
VO_9	12	30 IO_8
VO_10	13	31 IO_9
VO_11	14	32 IO_10
A.GND	15	33 IO_11
VO_12	16	34 IO_12
VO_13	17	35 IO_13
VO_14	18	36 IO_14
VO_15	19	37 IO_15
		CON3

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	O O 02 DO 1
DO 2	03	O O 04 DO 3
DO 4	05	O O 06 DO 5
DO 6	07	O O 08 DO 7
DO 8	09	O O 10 DO 9
DO 10	11	O O 12 DO 11
DO 12	13	O O 14 DO 13
DO 14	15	O O 16 DO 15
GND	17	O O 18 GND
+5 V	19	O O 20 +12 V
		CON1

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	O O 02 DI 1
DI 2	03	O O 04 DI 3
DI 4	05	O O 06 DI 5
DI 6	07	O O 08 DI 7
DI 8	09	O O 10 DI 9
DI 10	10	O O 12 DI 11
DI 12	12	O O 14 DI 13
DI 14	14	O O 16 DI 15
GND	16	O O 18 GND
+5 V	18	O O 20 +12 V
		CON2

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo


## Hardware Specifications

Model	PEX-DA4	PEX-DA8	PEX-DA16
<b>Analog Outputs</b>			
Channels	4	8	16
Resolution	14-bit		
Accuracy	0.01% of FSR $\pm 2$ LSB @ 25°C, $\pm 10$ V		
Output Range	$\pm 10$ V, 0 ~ +20 mA		
Output Driving	$\pm 5$ mA		
Slew Rate	0.71 V/ $\mu$ s		
<b>Digital Inputs</b>			
Channels	16 (5 V/TTL)		
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.		
Response Speed	200 kHz (Typical)		
<b>Digital Outputs</b>			
Channels	16 (5 V/CMOS)		
Output Voltage	Logic 0: 0.1 V Max., Logic 1: 4.4 V Min.		
Output Capability	Sink: 6 mA @ 0.33 V, Source: 6 mA @ 4.77 V		
Response Speed	200 kHz (Typical)		
<b>General</b>			
Bus Type	PCI Express x1		
Card ID	Yes (4-bit)		
Connectors	Female DB37 x 1, 20-pin Box Header x 2		
Power Consumption	750 mA @ +3.3 V 350 mA @ +12 V	750 mA @ +3.3 V 400 mA @ +12 V	750 mA @ +3.3 V 550 mA @ +12 V
Operating Temperature	0°C to +60°C		
Humidity	5 to 85% RH, Non-condensing		

## Ordering Information

<b>PEX-DA4 CR</b>	PCI Express, 4-channel Analog Output Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PEX-DA8 CR</b>	PCI Express, 8-channel Analog Output Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PEX-DA16 CR</b>	PCI Express, 16-channel Analog Output board (RoHS). Includes one CA-4002 D-sub Connector.

## 2-4 Isolated Digital I/O Boards

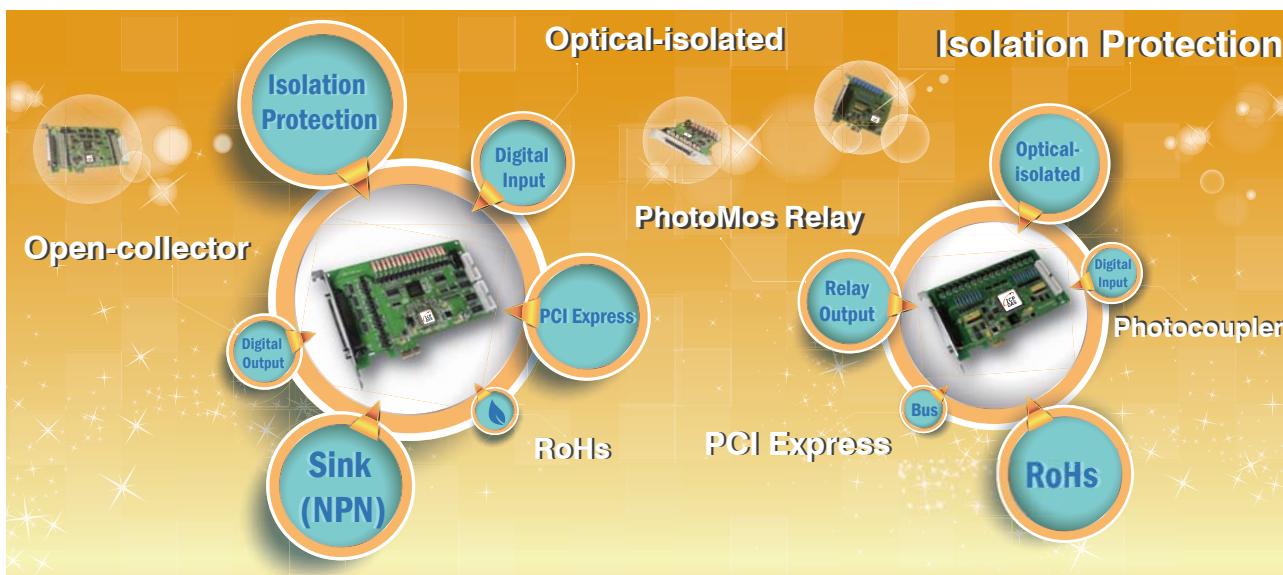

### Selection Guide

Model	PEX-P8R8i PEX-P16R16i	PEX-P8POR8i PEX-P16POR16i	PEX-P64		PEX-C64	PEX-P32C32	PEX-P32A32	PEX-730		PEX-730A					
			-	-24V				Isolated	Non-isolated	Isolated	Non-isolated				
Interface		PCI Express													
<b>Digital Input</b>															
Channels	8/16	8/16	64	-	32	16	16	16	16	16	16				
Isolation Voltage	3750 V <sub>rms</sub>	2000 V <sub>DC</sub>	3750 V <sub>rms</sub>	-	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>				
Compatibility	Photocoupler	Photocoupler	Photocoupler	-	Photocoupler	Optical	TTL	Optical	TTL	Optical	TTL				
Input Voltage	Logic 0	AC/DC 0 ~ +1 V	0 ~ +1 V	-	0 ~ +1 V	0 ~ +1 V	0.8 V Max.	0 ~ +1 V	0.8 V Max.	0 ~ +1 V	0.8 V Max.				
	Logic 1	AC/DC +5 ~ +24 V	+5 ~ +15 V	+20 ~ +28 V	-	+9 ~ +24 V	+9 ~ +24 V	2.0 V Min.	+9 ~ +24 V	2.0 V Min.	+9 ~ +24 V				
Input Impedance	1.2 KΩ, 0.5 W	1.2 KΩ, 0.5 W	1.2 KΩ, 1 W	3 KΩ, 1 W	-	3 KΩ, 0.25 W	1.2 KΩ, 1 W	1.2 KΩ, 1 W	1.2 KΩ, 1 W	1.2 KΩ, 1 W	1.2 KΩ, 1 W				
<b>Relay Output</b>															
Channels	8/16	8/16	-	-	-	-	-	-	-	-	-				
Relay Type	4 SPDT, 4 SPST/ 8 SPDT, 8 SPST	PhotoMos Relay (Form A)	-	-	-	-	-	-	-	-	-				
Contact Rating	AC: 120 V @ 0.5 A	Load Voltage: 300 V (AC Peak or DC)	-	-	-	-	-	-	-	-	-				
	DC: 24 V @ 1 A	Load Current: 130 mA	-	-	-	-	-	-	-	-	-				
Insulation Resistance	1000 MΩ @ 500 V <sub>DC</sub>		-	-	-	-	-	-	-	-	-				
<b>Digital Output</b>															
Channels	-	-	-	64	32	16	16	16	16	16	16				
Isolation Voltage	-	-	-	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>				
Compatibility	-	-	-	Sink	Sink	Source	Sink	5 V/TLL	Source	5 V/TLL	5 V/TLL				
Output Capability	-	-	-	100 mA/+30 V for each channel @ 60% duty	100 mA/+30 V for each channel @ 100% duty	100 mA/+30 V for each channel @ 100% duty	Sink: 2.4 mA @ 0.8 V	100 mA/+30 V for each channel @ 100% duty	Sink: 2.4 mA @ 0.8 V	100 mA/+30 V for each channel @ 100% duty	Sink: 2.4 mA @ 0.8 V				
				Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V	Source: 0.8 mA @ 2.0 V				

## PEX-P8R8i/PEX-P16R16i

PCI Express, 8/16-channel Isolated Digital Input and  
8/16-channel Relay Output Board



PEX-P8R8i

PEX-P16R16i



### Features ►►►

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>■ PCI Express x1 Interface</li> <li>■ Supports Card ID (SMD Switch)</li> <li>■ 8/16-channel Relay Output</li> <li>□ 7 ms Relay Release Time</li> </ul> | <ul style="list-style-type: none"> <li>■ 8/16-channel Isolated Digital Input</li> <li>□ Selectable DC Signal Input Filter</li> <li>□ AC Signal Input with Filter</li> <li>□ 2000 V<sub>DC</sub> Photo-isolation Protection</li> </ul> |
|---|---|

2

4

### Introduction

The PEX-P8R8i/PEX-P16R16i series utilizes the PCI Express bus and is designed as an easy replacement for the PISO-P16R16U board without requiring any modification to either the software or the driver.

The PEX-P8R8i/PEX-P16R16i provides 8/16 photocoupler Digital Input channels with 3750 V<sub>rms</sub> isolation protection, and allows the input signals to be completely floated to prevent ground loops. The boards are also equipped with 8/16 Relay Output channels that can be used for controlling the ON/OFF state of external devices, for driving external relays or small power switches, or for activating alarms, etc.

### Software

Drivers	
<input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10	<input checked="" type="checkbox"/> Linux
Sample Programs	
<input checked="" type="checkbox"/> DOS Lib and TC/BC/MSC Demo	<input checked="" type="checkbox"/> LabVIEW Toolkit
<input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo	

### Hardware Specifications

Model	PEX-P8R8i	PEX-P16R16i
<b>Digital Input</b>		
Isolation Voltage	2000 V <sub>DC</sub> (Photocoupler)	
Channels	8	16
Input Voltage	Logic 1: AC/DC +5 ~ +24 V (AC 50 ~ 1 kHz) Logic 0: AC/DC 0 ~ +1 V	
Response Speed	Without Filter: 50 kHz (Typical) With Filter: 0.455 kHz (Typical)	
<b>Relay Output</b>		
Channels	8	16
Relay Type	4 SPDT, 4 SPST	8 SPDT, 8 SPST
Contact Rating	120 V <sub>AC</sub> /24 V <sub>DC</sub> 1 A	
Operating Time	1 ms (Typical)	
Lifetime	Mechanical: 5,000,000 ops. Electrical: 100,000 ops.	
Insulation Resistance	1000 MΩ @ 500 V <sub>DC</sub>	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1	Female DB37 x 1, 40-pin Box Header x 1
Power Consumption	450 mA @ +3.3 V; 200 mA @ +12 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
NO_0	01	20 NO_3
COM_0	02	21 COM_3
NC_0	03	22 NC_3
NO_1	04	23 NO_4
COM_1	05	24 COM_4
NC_1	06	25 NO_5
NO_2	07	26 COM_5
COM_2	08	27 NO_6
NC_2	09	28 COM_6
NO_7	10	29 GND
COM_7	11	30 DIB_0
DIA_0	12	31 DIB_1
DIA_1	13	32 DIB_2
DIA_2	14	33 DIB_3
DIA_3	15	34 DIB_4
DIA_4	16	35 DIB_5
DIA_5	17	36 DIB_6
DIA_6	18	37 DIB_7
DIA_7	19	



### Ordering Information

<b>PEX-P8R8i CR</b>	PCI Express, 8-channel Isolated Digital Input, 8-channel Relay Output Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PEX-P16R16i CR</b>	PCI Express, 16-channel Isolated Digital Input, 16-channel Relay Output Board (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.

## PEX-P8POR8i/PEX-P16POR16i

PCI Express, 8/16-channel Isolated Digital Input and 8/16-channel PhotoMOS Relay Output Board



### Features ►►►

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- LED Power Indicator
- 8/16-channel Isolated Digital Input
  - Selectable DC Signal Input Filter
  - AC Signal Input with Filter
  - 2000 V<sub>DC</sub> Photo-isolation Protection

PEX-P8POR8i



PEX-P16POR16i



2

4

### Introduction

The PEX-P8POR8i/PEX-P16POR16i series utilizes the PCI Express bus and designed as an easy replacement for the PCI-P8POR8/P16POR16 series without requiring any modification to either the software or the driver.

The PEX-P8POR8i/PEX-P16POR16i provides 8/16 photocoupler Digital Input channels with 2000 V<sub>DC</sub> isolation protection, and allows the input signals to be completely floated to prevent ground loops. It is also equipped with 8/16 PhotoMOS Relay Outputs channels that can be used for controlling the ON/OFF state of external devices, for driving external relays or small power switches, or for activating alarms, etc.



### Hardware Specifications

Model	PEX-P8POR8i	PEX-P16POR16i
<b>Digital Input</b>		
Isolation Voltage	2000 V <sub>DC</sub> (Photocoupler)	
Channels	8	16
<b>Relay Output</b>		
Channels	8	16
Relay Type	PhotoMOS, Form A	
Contact Rating	Voltage Current	300 V (AC peak or DC) 130 mA
Operating Time	0.7 ms (Typical)	
Insulation Resistance	1000 MΩ @ 500 V <sub>DC</sub>	
Electrical Endurance	Long Life and No Spike	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1	Female DB37 x 1, 40-pin Box Header x 1
Power Consumption	550 mA @ +3.3 V 250 mA @ +12 V	600 mA @ +3.3 V 300 mA @ +12 V
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux


#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Pin Assignments

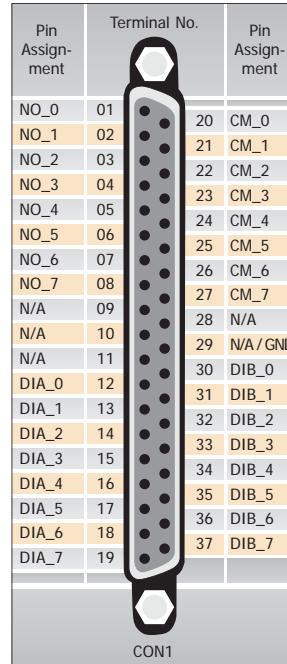

Pin Assignment	Terminal No.	Pin Assignment
NO_8	01	○ ○ 02 CM_8
NO_9	03	○ ○ 04 CM_9
NO_10	05	○ ○ 06 CM_10
NO_11	07	○ ○ 08 CM_11
NO_12	09	○ ○ 10 CM_12
NO_13	11	○ ○ 12 CM_13
NO_14	13	○ ○ 14 CM_14
NO_15	15	○ ○ 16 CM_15
N/A	17	○ ○ 18 N/A
N/A	19	○ ○ 20 N/A/GND
N/A	21	○ ○ 22 DIB_8
DIA_8	23	○ ○ 24 DIB_9
DIA_9	25	○ ○ 26 DIB_10
DIA_10	27	○ ○ 28 DIB_11
DIA_11	29	○ ○ 30 DIB_12
DIA_12	31	○ ○ 32 DIB_13
DIA_13	33	○ ○ 34 DIB_14
DIA_14	35	○ ○ 36 DIB_15
DIA_15	37	○ ○ 38 N/A
N/A	39	○ ○ 40 N/A

CON2 (PEX-P16POR16i only)

### Ordering Information

<b>PEX-P8POR8i CR</b>	PCI Express, 8-channel Isolated Digital Input, 8-channel PhotoMOS Relay Output Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PEX-P16POR16i CR</b>	PCI Express, 16-channel Isolated Digital Input, 16-channel PhotoMOS Relay Output Board (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.

# PEX-P64/PEX-P64-24V

PCI Express, 64-channel Optically-isolated Digital Input Board



2

4

PCI Express Data Acquisition Boards

## Features >>>

- PCI Express x1 Interface
- 64-channel Optically-isolated Digital Input
  - Internal Power (3000 V<sub>DC</sub> Isolation) for Dry-Contact Input
  - Supports Card ID (SMD Switch)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Digital Input Arranged into Four Isolated Banks when using Four Isolated External Power Supplies
- Selectable Internal or External Power for Digital Input

## Introduction

The PEX-P64/P64-24V series utilizes the PCI Express bus and provides 64 optically-isolated Digital Input channels that use either an internal or external power supply that can be selected via a jumper. The internal power is provided by an onboard isolated DC/DC converter that provides 3000 V<sub>DC</sub> isolation and is used for connecting dry-contact input devices. The DI channels are arranged into four isolated banks when using four isolated external power supplies, where DI channels 0 to 15 are allocated to bank A, DI channels 16 to 31 are allocated to bank B, DI channels 32 to 47 are allocated to bank C, and DI channels 48 to 63 are allocated to bank D. The onboard photocouplers provide 3750 V<sub>rms</sub> isolation, and act as an interface between field logic signals, eliminating ground loop problems and isolating the host computer from potentially damaging voltage spikes.

The PEX-P64/P64-24V series also include an onboard Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The PEX-P64/P64-24V series is designed as an easy replacement for the PISO-P64U board without requiring any modification to either the software or the driver.

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10       Linux

### Sample Programs

DOS Lib and TC/BC/MSC Demo  
 LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
IGND0	01	20	IGND1	02	IGND3
DI_0	02	21	DI_16	03	DI_48
DI_1	03	22	DI_17	05	DI_49
DI_2	04	23	DI_18	07	DI_50
DI_3	05	24	DI_19	09	DI_51
DI_4	06	25	DI_20	11	DI_52
DI_5	07	26	DI_21	13	DI_53
DI_6	08	27	DI_22	15	DI_54
DI_7	09	28	DI_23	17	DI_55
DI_8	10	29	DI_24	19	DI_56
DI_9	11	30	DI_25	21	DI_57
DI_10	12	31	DI_26	23	DI_58
DI_11	13	32	DI_27	25	DI_59
DI_12	14	33	DI_28	27	DI_60
DI_13	15	34	DI_29	29	DI_61
DI_14	16	35	DI_30	31	DI_62
DI_15	17	36	DI_31	33	DI_63
ECOM0	18	37	ECON1	35	ECOM3
N.C.	19			37	38 N.C.
				39	40 N.C.
					CON2



## Hardware Specifications

Model	PEX-P64	PEX-P64-24V
<b>Digital Input</b>		
Isolation Voltage	3750 V <sub>rms</sub>	
Channels	64	
Compatibility	Photocoupler Isolated	
Input Logic Low	0 ~ 1 V	0 ~ 1 V
Input Logic High	+5 ~ +15 V (+24 V Max.)	+20 ~ +28 V (+30 V Max.)
Impedance	1.2 KΩ, 1 W	3 KΩ, 1 W
Response Speed	4 kHz (Typical)	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 40-pin Box Header x 1	
Power Consumption	600 mA @ +3.3 V 400 mA @ +12 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



## Ordering Information

<b>PEX-P64 CR</b>	PCI Express, 64-channel Optically-isolated Digital Input Board (High: 5 ~ 15 V, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
<b>PEX-P64-24V CR</b>	PCI Express, 64-channel Optically-isolated Digital Input Board (High: 20 ~ 28 V, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.

## PEX-C64

PCI Express, 64-channel Open-collector Digital Output (Sink, NPN) Board



### Features >>>

- PCI Express x1 Interface
- 64-channel Optically-isolated Digital Output (Sink, NPN)
- Supports Output Status Readback
- Supports Card ID (SMD Switch)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Digital Input Arranged into Four Isolated Banks when using Four Isolated External Power Supplies

### Introduction

The PEX-C64 board utilizes the PCI Express bus and provides 64 optically-isolated Digital Output channels, each of which includes a Darlington transistor that provides 3750 V<sub>rms</sub> isolation, and an integrated suppression diode for the inductive load. The DO channels are allocated into four isolated banks when using four isolated external power supplies, and act as an interface between field logic signals, eliminating ground loop problems and isolating the host computer from potentially damaging voltage spikes.

The PEX-C64 board also includes an onboard Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The PEX-C64 board is designed as an easy replacement for the PISO-C64U board without requiring any modification to either the software or the driver.

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux

#### Sample Programs


- DOS Lib and TC/BC/MSC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications

Digital Output	
Isolation Voltage	3750 V <sub>rms</sub>
Channels	64
Compatibility	Sink, Open Collector
Output Capability	100 mA/+30 V for each channel @ 100% duty
Response Speed	4 kHz (Typical)
General	
Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1 40-pin Box Header x 1
Power Consumption	400 mA @ +3.3 V 200 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
Ext. GND0	01	20	Ext. GND1	02	Ext. GND3
DO_0	02	21	DO_16	03	04
DO_1	03	22	DO_17	05	06
DO_2	04	23	DO_18	07	08
DO_3	05	24	DO_19	09	10
DO_4	06	25	DO_20	11	12
DO_5	07	26	DO_21	13	14
DO_6	08	27	DO_22	15	16
DO_7	09	28	DO_23	17	18
DO_8	10	29	DO_24	19	20
DO_9	11	30	DO_25	21	22
DO_10	12	31	DO_26	23	24
DO_11	13	32	DO_27	25	26
DO_12	14	33	DO_28	27	28
DO_13	15	34	DO_29	29	30
DO_14	16	35	DO_30	31	32
DO_15	17	36	DO_31	33	34
Ext. PWR0	18	37	Ext. PWR1	35	36
N.C.	19			N.C.	37
					38
					N.C.
					40



CON1

CON2

### Ordering Information

PEX-C64 CR	PCI Express, 64-channel Optically-isolated Digital Output Board (Sink, NPN, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
------------	--

## PEX-P32C32/PEX-P32A32

PCI Express, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output (Sink/Source) Board



### Features >>>

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>■ PCI Express x1 Interface</li> <li>■ 32-channel Optically-isolated Digital Input           <ul style="list-style-type: none"> <li>□ Internal Power (3000 V<sub>DC</sub> Isolation) for Dry-Contact Input</li> </ul> </li> <li>■ 3750 V<sub>rms</sub> Photo-isolation Protection</li> <li>■ Supports Card ID (SMD Switch)</li> </ul> | <ul style="list-style-type: none"> <li>■ 32-channel Optically-isolated Digital Output           <ul style="list-style-type: none"> <li>□ PEX-P32C32: Current Sinking (NPN)</li> <li>□ PEX-P32A32: Current Sourcing (PNP)</li> <li>□ Supports Output Status Readback (Register Level)</li> </ul> </li> </ul> |
|---|---|

2

4



### Introduction

The PEX-P32C32/P32A32 series provides 32 optically-isolated Digital Input channels and 32 optically-isolated Digital Output channels, arranged into four isolated banks. Each input channel uses a photocoupler input that allows either an internal isolated power supply or an external power supply to be connected, and can be selected via a jumper.

Each Digital Output channel includes either a Darlington (PEX-P32C32) or a PNP (PEX-P32A32) transistor and an integrated suppression diode for the inductive load. The input port may use either an external power source or can be powered from the Host PC via a DC/DC converter. The output port should use an external power source. The board helps eliminate ground loop problems and isolates the host computer from potentially damaging voltage spikes.

The PEX-P32C32/P32A32 series also includes an onboard Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The PEX-P32C32/P32A32 series is designed as an easy replacement for the PISO-P32C32U/P32A32U series without requiring any modification to either the software or the driver.



### Software

- |   |   |
|---|---|
| <b>Drivers</b>                            | <input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10 |
| <input checked="" type="checkbox"/> Linux |   |

#### Sample Programs

- |   |
|---|
| <input checked="" type="checkbox"/> DOS Lib and TC/BC/MSC Demo                        |
| <input checked="" type="checkbox"/> LabVIEW Toolkit                                   |
| <input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo |



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
Ext. GND0	01	20	Ext. GND0	01	O O
DI_0	02	21	DO_0	03	O O
DI_1	03	22	DO_1	05	O O
DI_2	04	23	DO_2	07	O O
DI_3	05	24	DO_3	09	O O
DI_4	06	25	DO_4	11	O O
DI_5	07	26	DO_5	13	O O
DI_6	08	27	DO_6	15	O O
DI_7	09	28	DO_7	17	O O
DI_8	10	29	DO_8	19	O O
DI_9	11	30	DO_9	21	O O
DI_10	12	31	DO_10	23	O O
DI_11	13	32	DO_11	25	O O
DI_12	14	33	DO_12	27	O O
DI_13	15	34	DO_13	29	O O
DI_14	16	35	DO_14	31	O O
DI_15	17	36	DO_15	33	O O
ECOM0	18	37	Ext. PWR0	35	O O
IGND0	19			37	O O
				39	O O
					CON2
					CON1

PEX-P32C32

PEX-P32A32



### Hardware Specifications

Model	PEX-P32C32	PEX-P32A32
<b>Digital Input</b>		
Isolation Voltage	3750 Vrms	
Channels	32	
Compatibility	Sink or Source, Photocoupler isolated channel with common power or ground	
Input Voltage	Logic 0: 0 ~ +1 V, Logic 1: +9 ~ +24 V	
Impedance	3 kΩ, 0.25 W	
<b>Digital Output</b>		
Isolation Voltage	3750 Vrms	
Channels	32	
Compatibility	Sink, Open-collector	Source, Open-collector
Output Capability	100 mA/+30 V for each channel @ 100% duty	
<b>General</b>		
Bus Type	PCI Express x1	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 40-pin Box Header x 1	
Power Consumption	550 mA @ +3.3 V; 350 mA @ +12 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

### Ordering Information

<b>PEX-P32C32 CR</b>	PCI Express, 32-ch Optically-isolated Digital Input and 32-ch Optically-isolated Open-collector Digital Output Board (Sink, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
<b>PEX-P32A32 CR</b>	PCI Express, 32-ch Optically-isolated Digital Input and 32-ch Optically-isolated Open-collector Digital Output Board. (Source, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.

## PEX-730

PCI Express, 32-channel TTL Digital Input/Output



### Features ►►►

- PCI Express x1 Interface
- 16-channel Optically-isolated Digital Input
- 16-channel Optically-isolated Digital Output
  - PEX-730: Current Sinking (NPN)
- Supports Output Status Readback
- Supports Card ID (SMD Switch)



### Introduction

PEX-730 cards provide 32 isolated digital I/O channels (16 x DI and 16 x DO) and 32 TTL-level digital I/O channels (16 x DI and 16 x DO). Both the isolated DI and DO channels use a short optical transmission path to transfer an electronic signal between the elements of a circuit and keep them electrically isolated. With 3750 V<sub>rms</sub> isolation protection, these DI/O channels allow the input signals to be completely floated so as to prevent ground loops and isolate the host computer from damaging voltages. Each digital output offers a Darlington NPN (Current Sinking for PEX-730) transistor and integrated suppression diode for the inductive load. The open collector outputs (DO channels) are typically used for alarm and warning notification, signal output control, control for external circuits that require a higher voltage level, and signal transmission applications, etc.

These cards also adds a Card ID switch. Users can set Card ID on a board and recognize the board by the ID via software when using two or more cards in one computer. The PEX-730 is designed as easy replacement for the PISO-730U/PISO-730A without any software/driver modification.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
IDI_0	01	20 IDI_1
IDI_2	02	21 IDI_3
IDI_4	03	22 IDI_5
IDI_6	04	23 IDI_7
IDI_8	05	24 IDI_9
IDI_10	06	25 IDI_11
IDI_12	07	26 IDI_13
IDI_14	08	27 IDI_15
EI.COM1	09	28 EI.COM2
EO.COM1	10	29 IGND
IDO_0	11	30 IDO1
IDO_2	12	31 IDO3
IDO_4	13	32 IDO5
IDO_6	14	33 IDO7
IDO_8	15	34 IDO9
IDO_10	16	35 IDO11
IDO_12	17	36 IDO13
IDO_14	18	37 IDO15
EO.COM2	19	
		CON1

2

4

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications

Model	PEX-730
<b>Isolated Digital Input</b>	
Channels	16
Compatibility	Optical
Isolation Voltage	3750 V <sub>rms</sub>
Input Voltage	Logic 0: 0 ~ +1 V, Logic 1: +9 ~ +24 V
Input Impedance	1.2 kΩ, 1 W
Response Speed	4 kHz (Typical)
<b>Isolated Digital Output</b>	
Channels	16
Compatibility	Sink (NPN), Open Collector
Isolation Voltage	3750 V <sub>rms</sub>
Output Capability	100 mA/+30 V for each channel @ 100% duty
Response Speed	4 kHz (Typical)
<b>Non-isolated Digital Input</b>	
Channels	16
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.
Response Speed	500 kHz
<b>Non-isolated Digital Output</b>	
Channels	16
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V
Response Speed	500 kHz
<b>General</b>	
Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1, 20-pin Box Header x 2
Power Consumption	350 mA @ +3.3 V; 250 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



### Ordering Information

<b>PEX-730 CR</b>	PCI Express, 32-channel Isolated Digital Input/Output and 32-channel TTL Digital Input/Output Board. (Current Sinking, RoHS). Includes one CA-4002 D-sub Connector.
-------------------	---

## PEX-730A

32-channel Isolated Digital Input/Output (Sink/Source) Board



2

4

### Features ►►►

- PCI Express x1 Interface
- 16-channel Optically-isolated Digital Input
- 16-channel Optically-isolated Digital Output
  - PEX-730A: Current Sourcing (PNP)
- Supports Output Status Readback
- Supports Card ID (SMD Switch)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Internal Power (3000 V<sub>DC</sub> isolation) for Dry-contact Input
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
- Two Interrupt Sources



### Introduction

PEX-730A cards provide 32 isolated digital I/O channels (16 x DI and 16 x DO) and 32 TTL-level digital I/O channels (16 x DI and 16 x DO). Both the isolated DI and DO channels use a short optical transmission path to transfer an electronic signal between the elements of a circuit and keep them electrically isolated. With 3750 V<sub>rms</sub> isolation protection, these DI/O channels allow the input signals to be completely floated so as to prevent ground loops and isolate the host computer from damaging voltages. Each digital output offers a Darlington NPN (Current Sinking for PEX-730) or PNP (Current Sourcing for PEX-730A) transistor and integrated suppression diode for the inductive load. The open collector outputs (DO channels) are typically used for alarm and warning notification, signal output control, control for external circuits that require a higher voltage level, and signal transmission applications, etc.

These cards also adds a Card ID switch. Users can set Card ID on a board and recognize the board by the ID via software when using two or more cards in one computer. The PEX-730/730A is designed as easy replacement for the PISO-730U/PISO-730A without any software/driver modification.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
IDI_0	01			01	DI 1
IDI_2	02	20	IDI_1	02	DI 1
IDI_4	03	21	IDI_3	03	DI 3
IDI_6	04	22	IDI_5	06	DI 5
IDI_8	05	23	IDI_7	07	DI 7
IDI_10	06	24	IDI_9	09	DI 9
IDI_12	07	25	IDI_11	11	DI 11
IDI_14	08	26	IDI_13	13	DI 13
EI.COM1	09	27	IDI_15	15	DI 15
EO.COM1	10	28	EI.COM2	17	GND
IDO_0	11	29	IGND	19	+12 V
IDO_2	12	30	IDO1	01	DO 1
IDO_4	13	31	IDO3	03	DO 3
IDO_6	14	32	IDO5	05	DO 5
IDO_8	15	33	IDO7	07	DO 7
IDO_10	16	34	IDO9	09	DO 9
IDO_12	17	35	IDO11	10	DO 11
IDO_14	18	36	IDO13	12	DO 13
EO.COM2	19	37	IDO15	14	DO 15
				16	GND
				18	+12 V

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	O O
DO 2	03	O O
DO 4	05	O O
DO 6	07	O O
DO 8	09	O O
DO 10	10	O O
DO 12	12	O O
DO 14	14	O O
GND	16	O O
+5 V	18	O O

CON2

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	O O
DO 2	03	O O
DO 4	05	O O
DO 6	07	O O
DO 8	09	O O
DO 10	10	O O
DO 12	12	O O
DO 14	14	O O
GND	16	O O
+5 V	18	O O

CON3



### Ordering Information

<b>PEX-730A CR</b>	PCI Express, 32-channel Isolated Digital Input/Output and 32-channel TTL Digital Input/Output Board. (Current Sourcing, RoHS). Includes one CA-4002 D-sub Connector.
--------------------	--



### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Hardware Specifications

Model	PEX-730A
<b>Isolated Digital Input</b>	
Channels	16
Compatibility	Optical
Isolation Voltage	3750 V <sub>rms</sub>
Input Voltage	Logic 0: 0 ~ +1 V, Logic 1: +9 ~ +24 V
Input Impedance	1.2 kΩ, 1 W
Response Speed	4 kHz (Typical)
<b>Isolated Digital Output</b>	
Channels	16
Compatibility	Source (PNP), Open Collector
Isolation Voltage	3750 V <sub>rms</sub>
Output Capability	100 mA/+30 V for each channel @ 100% duty
Response Speed	4 kHz (Typical)
<b>Non-isolated Digital Input</b>	
Channels	16
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.
Response Speed	500 kHz
<b>Non-isolated Digital Output</b>	
Channels	16
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V
Response Speed	500 kHz
<b>General</b>	
Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1, 20-pin Box Header x 2
Power Consumption	350 mA @ +3.3 V; 250 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

## 2-5 Non-isolated Digital I/O Boards



2

5

PCI Express Data Acquisition Boards



### Selection Guide

Model	PEX-D24	PEX-D48	PEX-D56	PEX-D96S	PEX-D144S
Interface	PCI Express				
<b>Programmable DI/O</b>					
Channels	24	48	24	96	144
<b>Digital Input</b>					
Channels	-	-	16	-	-
Compatibility	5 V/TTL	5 V/TTL	5 V/TTL	5 V/CMOS	5 V/CMOS
Input Voltage	Logic 0: 0.8 Max. Logic 1: 2.0 Min.				
<b>Digital Output</b>					
Channels	-	-	16	-	-
Compatibility	5 V/TTL	5 V/TTL	5 V/TTL	5 V/CMOS	5 V/CMOS
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.	Logic 0: 0.1 V Max. Logic 1: 4.4 V Min.	Logic 0: 0.1 V Max. Logic 1: 4.4 V Min.
<b>Timer/Counter</b>					
Channels	-	2	-	-	-
<b>Connector</b>					
100-pin SCSI II	-	-	-	1	1
50-pin Header	-	1	-	-	1
37-pin D-Sub	1	1	1	-	-
20-pin Header	-	-	2	-	-

## PEX-D24/PEX-D56

PCI Express, 24/56-channel Digital I/O Board



PEX-D24



PEX-D56



### Features >>>

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- DI/O Response Time approximately 2 µs (500 kHz Max.)

- 24/56 Buffered TTL Digital Input/Output Lines
- Three 8-bit Bi-directional I/O Ports
- DO Provides Higher Driving Capability
- Four Interrupt Sources

2

5

### Introduction

The PEX-D24/D56 series utilizes the PCI Express bus and is designed as an easy replacement for the PIO-D24/PIO-D24U/PIO-D56/PIO-D56U series without requiring any modification to either the software or the driver.

The PEX-D24/D56 provides 24/56 buffered TTL Digital Input/Output lines, which are grouped into three 8-bit bi-directional ports: Port A (PA), Port B (PB) and Port C (PC), and are configured as input mode during power-on or after a reset.

The PEX-D24/D56 also includes an onboard Card ID that enables the board to be easily recognized via software if two or more cards are installed in the same computer.



### Hardware Specifications

Model	PEX-D24	PEX-D56	
<b>Programmable DI/O</b>			
Channels	24		
<b>Digital Input</b>			
Channels	-	16	
Compatibility	5 V/TTL		
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.		
Response Speed	500 kHz		
<b>Digital Output</b>			
Channels	-	16	
Compatibility	5 V/TTL		
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.		
Output Capability	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V	CN1  CN3	Sink: 2.4 mA @ 0.8 V Source: 0.8 mA @ 2.0 V  Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	500 kHz		
<b>General</b>			
Bus Type	PCI Express x1		
Card ID	Yes (4-bit)		
Connectors	Female DB37 x 1	Female DB37 x 1, 20-pin Male Box Header x 2	
Power Consumption	650 mA @ +3.3 V 0 mA @ +12 V	750 mA @ +3.3 V 0 mA @ +12 V	
Operating Temperature	0°C to +60°C		
Humidity	5 to 85% RH, Non-condensing		

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
N.C	01	20	+5V	01	02 DI 1
N.C.	02	21	GND	03	04 DI 3
PB_7	03	22	PC_7	05	06 DI 5
PB_6	04	23	PC_6	07	08 DI 7
PB_5	05	24	PC_5	09	10 DI 9
PB_4	06	25	PC_4	11	12 DI 11
PB_3	07	26	PC_3	13	14 DI 13
PB_2	08	27	PC_2	15	16 DI 15
PB_1	09	28	PC_1	17	18 GND
PB_0	10	29	PC_0	19	20 +12 V
GND	11	30	PA_7		
N.C.	12	31	PA_6		
GND	13	32	PA_5		
N.C.	14	33	PA_4		
GND	15	34	PA_3		
N.C.	16	35	PA_2		
GND	17	36	PA_1		
+5V	18	37	PA_0		
GND	19				

CON2 (PEX-D56 only)

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	02 DO 1
DO 2	03	04 DO 3
DO 4	05	06 DO 5
DO 6	07	08 DO 7
DO 8	09	10 DO 9
DO 10	10	12 DO 11
DO 12	12	14 DO 13
DO 14	14	16 DO 15
GND	16	18 GND
+5 V	18	20 +12 V

CON1 (PEX-D56 only)



### Ordering Information

PEX-D24 CR	PCI Express, 24-channel Digital I/O Board (RoHS)
PEX-D56 CR	PCI Express, 56-channel Digital I/O Board (RoHS)

## PEX-D48

PCI Express, 48-channel Digital I/O Board



### Features ►►►

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- DI/O Response Time approximately 2 µs (500 kHz Max.)
- DO Provides Higher Driving Capability
- One 16-bit Event Counter

- 48 Buffered TTL Digital Input/Output Lines
- Six 8-bit Bi-directional Input/Output Ports
- One 32-bit Programmable Internal Timer
- Pull-high/Pull-low Jumpers for DI Channels
- Four Interrupt Sources

2

5

### Introduction

The PEX-D48 board utilizes the PCI Express bus and is designed as an easy replacement for the PIO-D48/PIO-D48U/PIO-D48SU series without requiring any modification to either the software or the driver.

The PEX-D48 provides 48 buffered TTL Digital Input/Output lines, which are grouped into six 8-bit bi-directional ports: Port A (PA), Port B (PB) and Port C (PC). Port C can also be split into two nibble-wide (4-bit) segments. All ports are configured as input mode during power-on or after a reset.

The PEX-D48 also includes an onboard Card ID that enables the board to be easily recognized via software if two or more cards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or line broken.

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10       Linux

#### Sample Programs

DOS Lib and TC/BC/MSC Demo       LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
N.C	01	
N.C.	02	20 +5 V
PB_7	03	21 GND
PB_6	04	22 PC_7
PB_5	05	23 PC_6
PB_4	06	24 PC_5
PB_3	07	25 PC_4
PB_2	08	26 PC_3
PB_1	09	27 PC_2
PB_0	10	28 PC_1
GND	11	29 PC_0
N.C.	12	30 PA_7
GND	13	31 PA_6
N.C.	14	32 PA_5
GND	15	33 PA_4
N.C.	16	34 PA_3
GND	17	35 PA_2
+5 V	18	36 PA_1
GND	19	37 PA_0

Pin Assignment	Terminal No.	Pin Assignment
PC_7	01	○ ○ 02 GND
PC_6	03	○ ○ 04 GND
PC_5	05	○ ○ 06 GND
PC_4	07	○ ○ 08 GND
PC_3	09	○ ○ 10 GND
PC_2	11	○ ○ 12 GND
PC_1	13	○ ○ 14 GND
PC_0	15	○ ○ 16 GND
PB_7	17	○ ○ 18 GND
PB_6	19	○ ○ 20 GND
PB_5	21	○ ○ 22 GND
PB_4	23	○ ○ 24 GND
PB_3	25	○ ○ 26 GND
PB_2	27	○ ○ 28 GND
PB_1	29	○ ○ 30 GND
PB_0	31	○ ○ 32 GND
PA_7	33	○ ○ 34 GND
PA_6	35	○ ○ 36 GND
PA_5	37	○ ○ 38 GND
PA_4	39	○ ○ 40 GND
PA_3	41	○ ○ 42 GND
PA_2	43	○ ○ 44 GND
PA_1	45	○ ○ 46 GND
PA_0	47	○ ○ 48 GND
+5 V	49	○ ○ 50 GND



### Hardware Specifications

#### Programmable DI/O

Channels	48
Compatibility	5 V/TTL

#### Digital Input

Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	500 kHz

#### Digital Output

Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.
Output Capability	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	500 kHz

#### Timer/Counter

Channels	2 (Event Timer x 1/32-bit Timer x 1)
Resolution	16-bit
Reference Clock	Internal: 4 MHz

#### General

Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1 50-pin Box Header x 1
Power Consumption	1500 mA @ +3.3 V 0 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



### Ordering Information

PEX-D48 CR	PCI Express, 48-channel Digital I/O Board (RoHS)
------------	--

# PEX-D96S

PCI Express, 96-channel Digital I/O Board



## Features ►►►

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- DI/O Response Time approximately 2 µs (500 kHz Max.)
- DO Provides Higher Driving Capability

## Introduction

The PEX-D96S supports PCI Express bus. These cards provide 96 TTL Digital I/O lines that consist of twelve 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs ports on power-up or after a reset.

The PEX-D96S provides a single high-density connector that reduces the amount of installation space required for the card in the computer. The PEX-D96S cards include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

The cards support various OS versions, such as Linux, DOS, Windows, DLL and Active X control together with various language sample program based on Turbo C++, Borland C++, Microsoft C++, Visual C++, Borland Delphi, Borland C++ Builder, Visual Basic, C#.NET, Visual Basic.NET and LabVIEW are provided in order to help users to quickly and easily develop their own applications.



## Hardware Specifications

Model	PEX-D96S
<b>Programmable DI/O</b>	
Channels	96
<b>Digital Input</b>	
Compatibility	5 V/CMOS
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	500 kHz
<b>Digital Output</b>	
Compatibility	5 V/CMOS
Output Voltage	Logic 0: 0.1 V Max. Logic 1: 4.4 V Min.
Output Capability	Sink: 6 mA @ 0.33 V Source: 6 mA @ 4.77 V
Response Speed	500 kHz
<b>General</b>	
Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female SCSI II 100-pin x 1
Power Consumption	650 mA @ +3.3 V 0 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



## Ordering Information

**PEX-D96S CR** | PCI Express, 96-channel Digital I/O Board (RoHS)



- 96 Buffered CMOS Digital Input/Output Lines
- Twelve/Eighteen 8-bit Bi-directional I/O Ports
- Four Interrupt Sources
- Pull-high/Pull-low Jumpers for DI Channels

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51 PA_10
PA_01	02	52 PA_11
PA_02	03	53 PA_12
PA_03	04	54 PA_13
PA_04	05	55 PA_14
PA_05	06	56 PA_15
PA_06	07	57 PA_16
PA_07	08	58 PA_17
PB_00	09	59 PB_10
PB_01	10	60 PB_11
PB_02	11	61 PB_12
PB_03	12	62 PB_13
PB_04	13	63 PB_14
PB_05	14	64 PB_15
PB_06	15	65 PB_16
PB_07	16	66 PB_17
PC_00	17	67 PC_10
PC_01	18	68 PC_11
PC_02	19	69 PC_12
PC_03	20	70 PC_13
PC_04	21	71 PC_14
PC_05	22	72 PC_15
PC_06	23	73 PC_16
PC_07	24	74 PC_17
GND	25	75 GND
PA_20	26	76 PA_30
PA_21	27	77 PA_31
PA_22	28	78 PA_32
PA_23	29	79 PA_33
PA_24	30	80 PA_34
PA_25	31	81 PA_35
PA_26	32	82 PA_36
PA_27	33	83 PA_37
PB_20	34	84 PB_30
PB_21	35	85 PB_31
PB_22	36	86 PB_32
PB_23	37	87 PB_33
PB_24	38	88 PB_34
PB_25	39	89 PB_35
PB_26	40	90 PB_36
PB_27	41	91 PB_37
PC_20	42	92 PC_30
PC_21	43	93 PC_31
PC_22	44	94 PC_32
PC_23	45	95 PC_33
PC_24	46	96 PC_34
PC_25	47	97 PC_35
PC_26	48	98 PC_36
PC_27	49	99 PC_37
+5 V	50	100 +5 V

CON1

## PEX-D144LS

PCI Express, 144-channel Digital I/O Board



### Features ►►►

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- DI/O Response Time approximately 2 µs (500 kHz Max.)
- DO Provides Higher Driving Capability

- 144 Buffered CMOS Digital Input/Output Lines
- Twelve/Eighteen 8-bit Bi-directional I/O Ports
- Four Interrupt Sources
- Pull-high/Pull-low Jumpers for DI Channels

### Introduction

The PEX-D144LS supports PCI Express bus. These cards provide 144 TTL digital I/O lines that are grouped into eighteen 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs Ports on power-up or after a reset.

The PEX-D144LS provides a high-density connector that reduces the amount of installation space required for the card in the computer. The PEX-D144LS cards include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer. The PEX-D144LS also adds pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

The cards support various OS versions, such as Linux, DOS, Windows, DLL and Active X control together with various language sample program based on Turbo C++, Borland C++, Microsoft C++, Visual C++, Borland Delphi, Borland C++ Builder, Visual Basic, C#.NET, Visual Basic.NET and LabVIEW are provided in order to help users to quickly and easily develop their own applications.



### Hardware Specifications

Model	PEX-D144LS
<b>Programmable DI/O</b>	
Channels	144
<b>Digital Input</b>	
Compatibility	5 V/CMOS
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	500 kHz
<b>Digital Output</b>	
Compatibility	5 V/CMOS
Output Voltage	Logic 0: 0.1 V Max. Logic 1: 4.4 V Min.
Output Capability	Sink: 6 mA @ 0.33 V Source: 6 mA @ 4.77 V
Response Speed	500 kHz
<b>General</b>	
Bus Type	PCI Express x1
Card ID	Yes (4-bit)
Connectors	Female SCSI II 100-pin x 1, 50-pin Box Header x 1
Power Consumption	750 mA @ +3.3 V 0 mA @ +12 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51	PA_10	01	○ ○ 02 +5 V
PA_01	02	52	PA_11	03	○ ○ 04 PA_50
PA_02	03	53	PA_12	05	○ ○ 06 PA_51
PA_03	04	54	PA_13	07	○ ○ 08 PA_52
PA_04	05	55	PA_14	09	○ ○ 10 PA_53
PA_05	06	56	PA_15	11	○ ○ 12 PA_54
PA_06	07	57	PA_16	13	○ ○ 14 PA_55
PA_07	08	58	PA_17	15	○ ○ 16 PA_56
PB_00	09	59	PA_18	19	○ ○ 20 PB_50
PB_01	10	60	PB_11	21	○ ○ 22 PB_51
PB_02	11	61	PB_12	23	○ ○ 24 PB_52
PB_03	12	62	PB_13	25	○ ○ 26 PB_53
PB_04	13	63	PB_14	27	○ ○ 28 PB_54
PB_05	14	64	PB_15	29	○ ○ 30 PB_55
PB_06	15	65	PB_16	31	○ ○ 32 PB_56
PB_07	16	66	PB_17	33	○ ○ 34 PB_57
PC_00	17	67	PC_10	35	○ ○ 36 PC_50
PC_01	18	68	PC_11	37	○ ○ 38 PC_51
PC_02	19	69	PC_12	39	○ ○ 40 PC_52
PC_03	20	70	PC_13	41	○ ○ 42 PC_53
PC_04	21	71	PC_14	43	○ ○ 44 PC_54
PC_05	22	72	PC_15	45	○ ○ 46 PC_55
PC_06	23	73	PC_16	47	○ ○ 48 PC_56
PC_07	24	74	PC_17	49	○ ○ 50 PC_57
		75	GND		CON2 (PEX-D144LS only)
		76	PA_30		
		77	PA_31		
		78	PA_32		
		79	PA_33		
		80	PA_34		
		81	PA_35		
		82	PA_36		
		83	PA_37		
		84	PA_38		
		85	PA_39		
		86	PA_40		
		87	PA_41		
		88	PA_42		
		89	PA_43		
		90	PA_44		
		91	PA_45		
		92	PA_46		
		93	PA_47		
		94	PA_48		
		95	PA_49		
		96	PA_50		
		97	PA_51		
		98	PA_52		
		99	PA_53		
		100	+5 V		

CON1 CON2 (PEX-D144LS only)

### Ordering Information

**PEX-D144LS CR** PCI Express, 144-channel Digital I/O Board (RoHS)

# 3. PCI Bus Data Acquisition Boards



3

1



Selection Guide

3-1 High Speed Multifunction Board

3-2 Multifunction Board

Model	PCI-2602U	PCI-AD64SU	PCI-826	PCI-822	PCI-1802	PCI-1800	PCI-1602	PCI-1202	PCI-1002	PIO-821	PISO-813U											
Interface	Universal PCI																					
<b>Analog Input</b>																						
Resolution	16-bit		16-bit	12-bit	12-bit	12-bit	16-bit	12-bit	12-bit	12-bit	12-bit											
Channels	SE	16		32	32	16	32	32	32	16	32											
	Diif.	8		16	16	8	16	16	16	8	-											
Sampling Rate	1 MS/s		250 KS/s	330 KS/s	44 KS/s	330 KS/s	44 KS/s	100 KS/s	200 KS/s	110 KS/s	40 KS/s											
FIFO Size	8 k		8 k	8 k	1 k	8 k	1 k	-	-	-	-											
Unipolar Input	-		-	✓	✓	-	✓	-	-	-	✓											
Bipolar Input	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓											
<b>Analog Output</b>																						
Resolution	16-bit		16-bit	12-bit	12-bit	12-bit	12-bit	-	12-bit	-	-											
Channels	2		2	2	2	2	2	-	1	-	-											
Output Voltage	±10 V, ±5 V, ±EXT_REF, 0 ~ +10 V, 0 ~ +5 V, 0~EXT_REF		±5 V, ±10 V 0 ~ +5 V, 0 ~ +10 V	±5, ±10	±5 V, ±10 V	±5 V, ±10 V	±5 V, ±10 V	-	0 ~ +10 V, 0 ~ +5 V, 0 ~ EXT_REF	-	-											
<b>Digital I/O</b>																						
DI Channels	-		-	16	16	16	16	16	16	-	-											
DO Channels	-		-	16	16	16	16	16	16	-	-											
Programmable DIO Channels	32		32	-	-	-	-	-	-	-	-											
Compatibility	DI: 5 V/TTL DO: 5 V/CMOS		5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	-	-											
<b>Timer/Counter</b>																						
Channels	-		-	1	1	1	1	1	3	-	-											
Resolution	-		-	16-bit	16-bit	16-bit	16-bit	16-bit	16-bit	-	-											
Clock Source	-		-	8 MHz	8 MHz	8 MHz	8 MHz	4 MHz	2 MHz	-	-											

## 3-1 High Speed Multifunction Board

### PCI-2602U

Universal PCI , 1 MS/s High-speed, 16-channel Analog Input, 2-channel Analog Output and 32-channel DI/O Multifunction Board



#### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 2-channel 16-bit Voltage Output
  - 512-sample Hardware FIFO for Analog Pattern Generator
- 32-channel Programmable DI/O
  - Supports DO Status Readback (Register Level)
  - 512-sample Hardware FIFO for Digital Pattern Generator
  - Digital Input Filter Function
- 16 Single-ended/8 Differential Analog Input Channels
  - 16-bit ADC with Max. 1 MS/s Sampling Rate
  - 8192-sample Hardware FIFO for Analog Input
  - Supports Variety of Programmable AD Trigger Mode
  - AD Data Transfer: Polling, Interrupt, DMA
  - AD R/L Filter Function
  - AD Continuous Capture
  - AD Auto-calibration Function

#### Introduction

The PCI-2602U is a high-performance multifunction card that provides Analog and Digital I/O functions for high-speed data transfer, analog signal measurement, I/O control and pattern generation applications, etc. The card features a continuous, 1 MS/s 16-bit resolution AD converter, an 8 K-sample hardware FIFO, a 2-channel 16-bit DA converter, and 32-channel programmable Digital I/O with Digital Output readback. The PCI-2602U provides either 16-channel single-ended or 8-channel differential Analog Input, which is selectable via software, and is equipped with a high speed PGA featuring programmable gain.

In addition, the PCI-2602U card also provides the following advantages:

##### ① Card ID

The PCI-2602U also includes an onboard Card ID that enables the board to be recognized via software if two or more PCI-2602U cards are installed in the same computer.

##### ② Programmable Digital Input Filters (DI)

Programmable Digital Input filters can be employed to remove noise, glitches, and spikes on Digital Input ports, as well as to denounce the signal from the switch and relays in noisy industrial environments to prevent false readings caused by noise. The filter for the Digital Input channel can be configured by setting the filter time in seconds, preventing invalid readings and false triggers related to status change detection events.

##### ③ Analog Pattern Generator (DA)

The PCI-2602 can be used to generate arbitrary wave shapes on a single Analog Output port based on user-defined waveform patterns. The Analog Pattern Generator operates at a full 20 MHz rate and is suitable for control systems or radar simulation, etc. The user-defined waveform pattern is stored in the onboard memory with a length of 512 samples of 16-bit data for simple- or complex-pattern applications.

##### ④ Digital Pattern Generator (DO)


The PCI-2602U can be used to continuously output a digital pattern on the Digital Output port by utilizing a user-defined data pattern and rate that is based on 100 ns high-resolution timing (10 MHz).

3


1

PCI Bus Data Acquisition Boards


#### AD DMA Operation

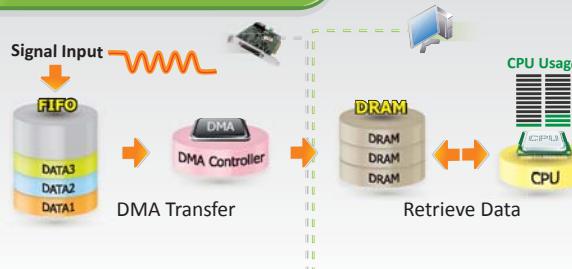


#### DO FIFO

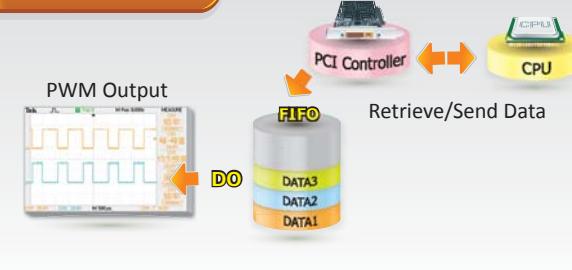

#### Pattern Generator

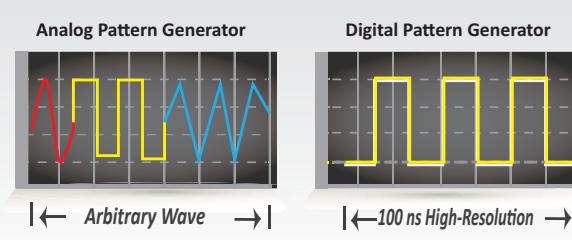

## Microphone Testing

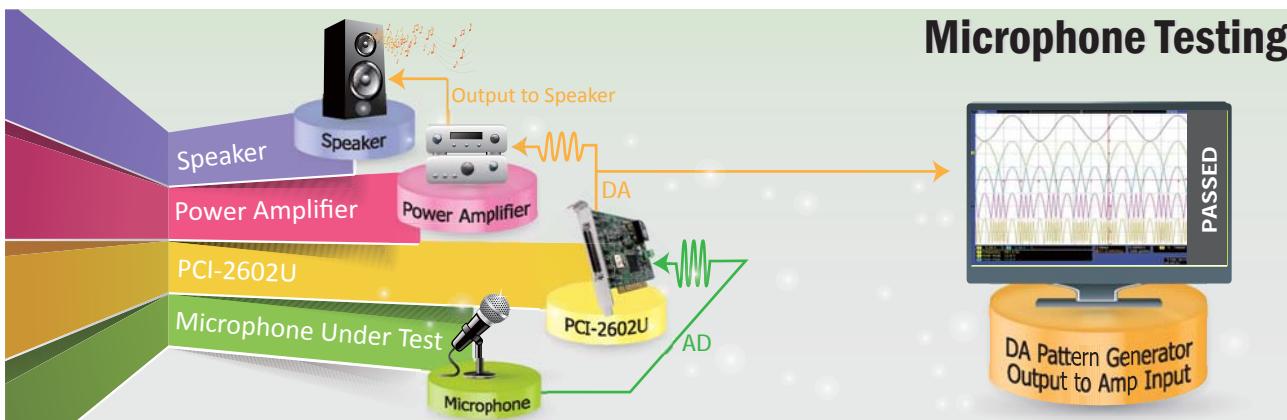

### ⑥ AD Continuous Capture

PCI-2602U provides the AD continuous capture function. The continuous capture refers to the acquisition of an unspecified number of samples. Instead of acquiring a set number of data samples and stopping, a continuous acquisition continues until you stop the operation.

3

1



### ⑦ Pulse Width Modulation (PWM, DO)

PCI-2602U is capable of producing PWM signals. PWM signals can be generated as a digital signal, using digital output line(s) from PA. PWM signals are most commonly used to control from controlling valves or pumps to adjusting the brightness of an LED.

### ⑧ SCSI II Connector

PCI-2602U provides a single SCSI II 68-pin high-density connector that reduces the required installation space and slot of the card in the computer and incorporates 32 programmable Digital I/O channels, 16 analog input channels and 2 analog output channels.




### ④ AD External Trigger


Synchronization of the data acquisition process relative to an external event is an important criterion in many applications. For example, user may want to collect data after receiving a pulse signal from an encoder or when the temperature of a chamber exceeds a critical value. In such instances, the PCI-2602U must be set up to start the ADC as soon as the external event, or trigger, occurs. PCI-2602U supports both analog and digital triggers.

#### ■ Digital Trigger: Post-trigger, Middle-trigger, Pre-trigger and Delay-trigger


- **Post-trigger Mode:** In post-trigger mode, the signals are digitized after a trigger condition occurs.

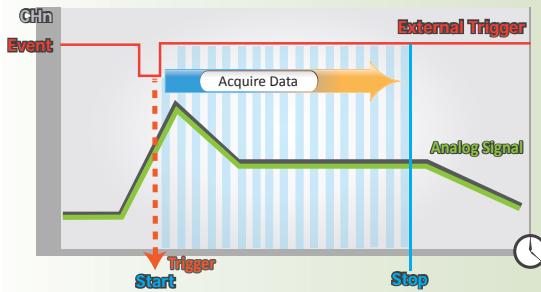


- **Pre-trigger Mode:** In pre-trigger mode, the signals are digitized before a trigger condition occurs.

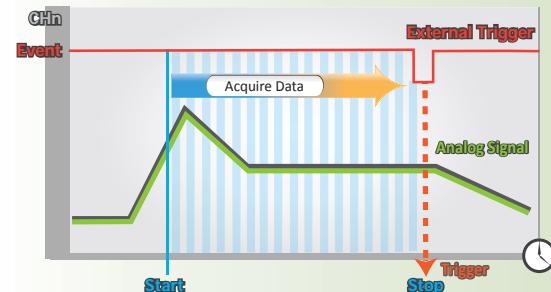

- **Middle-trigger Mode:** In middle-trigger mode, the signals are digitized both before and after a trigger condition occurs.

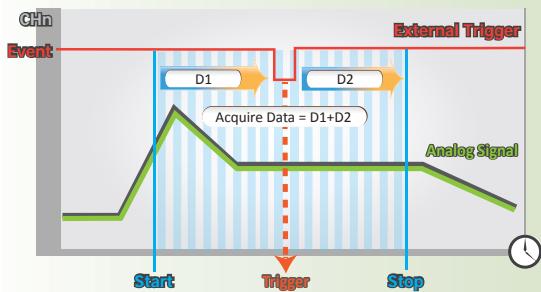


- **Delay-trigger Mode:** In delay-trigger mode, signal capture begins once the programmed delay period from the trigger has elapsed.

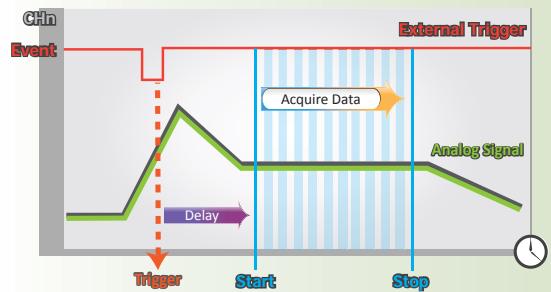


#### ■ Analog Trigger: There are six different types of analog trigger, as illustrated below:


- Type 1: Above High

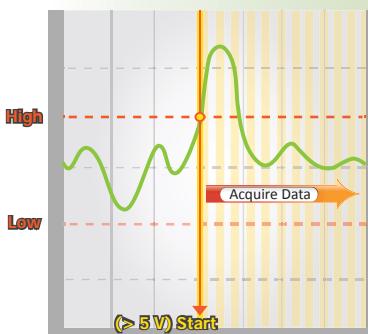


- Type 2: Below Low

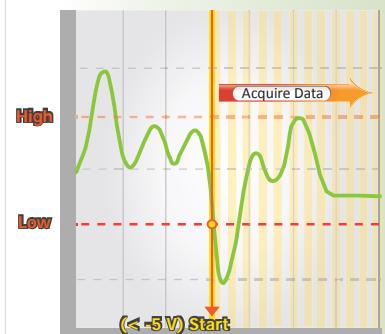


- Type 3A: Leave-region

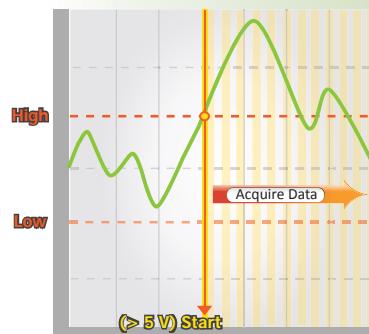


- Type 3B: Leave-region

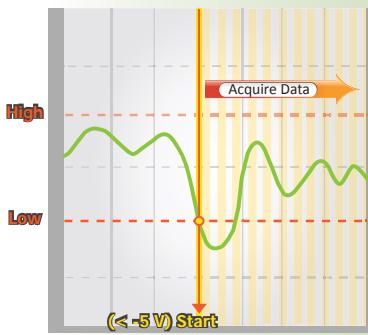

- Type 4A: Entry-region

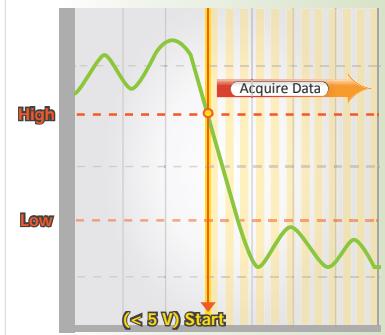

- Type 4B: Entry-region

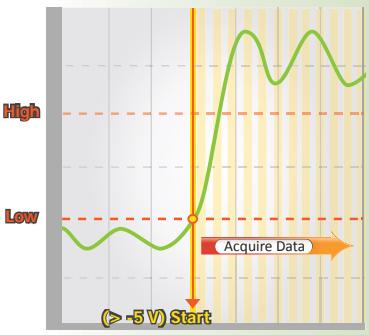



## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10

### Sample Programs

- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

3

1



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
+5 V (Output)	01	35 +12 V (Output)
Ext_TRG	02	36 Cnt0_GATE
Trg_GATE	03	37 Cnt0_OUT
Pacer_OUT	04	38 Cnt0_CLK
D_GND	05	39 D_GND
PD7	06	40 PD6
PD5	07	41 PD4
PD3	08	42 PD2
PD1	09	43 PDO
PC7	10	44 PC6
PC5	11	45 PC4
PC3	12	46 PC2
PC1	13	47 PC0
D_GND	14	48 D_GND
PB7	15	49 PB6
PB5	16	50 PB4
PB3	17	51 PB2
PB1	18	52 PBO
PA7	19	53 PA6
PA5	20	54 PA4
PA3	21	55 PA2
PA1	22	56 PA0
AO_GND	23	57 AO_GND
AO1_OUT	24	58 AOO_OUT
AO1_REF	25	59 AOO_REF
AI_GND	26	60 AI_GND
AI15	27	61 AI14
AI13	28	62 AI12
AI11	29	63 AI10
AI9	30	64 AI8
AI7	31	65 AI6
AI5	32	66 AI4
AI3	33	67 AI2
AI1	34	68 AI0

Female SCSI 68-pin (CON1)



## Hardware Specifications

### Analog Input

Channels	16 Single-ended/8 Differential
AD Converter	16-bit, 1 $\mu$ s conversion time
Sampling Rate	1 MS/s (Max.)
FIFO Size	8192 Samples
Bipolar Range	$\pm 10.24$ V, $\pm 5.12$ V, $\pm 2.56$ V

### Analog Output

Channels	2
Resolution	16-bit
FIFO Size	512 Samples
Output Rate	20 MS/s (Max.)
Output Range	$\pm 10$ V, $\pm 5$ V, $\pm$ EXT_REF, 0 ~ +10 V, 0 ~ +5 V, 0 ~ EXT_REF

### Programmable Digital I/O

Channels	32 (4-port Programmable)
----------	--------------------------

### Digital Input

Compatibility	5 V/TTL
FIFO Size	512 Samples
Input Voltage	Low: 0.8 V Max.; High: 2.0 V Min.

### Digital Output

Compatibility	5 V/CMOS
DO FIFO Size	512 Samples
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.
Output Voltage	Sink: 6 mA @ 0.33 V Source: 6 mA @ 4.77 V

### General

Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female SCSI II 68-pin x 1
Power Consumption	1 A @ +5 V (Max.)
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

## Accessories

<b>DN-68A CR</b>	DIN-Rail Mountable I/O Connector Block with 68-pin SCSI II Female Connector. (RoHS)
<b>CA-SCSI15-H</b>	68-pin SCSI-II Connector Cable, 1.5 m



DN-68A



CA-SCSI15-H

## 3-2 Multifunction Boards

### PCI-AD64SU

Universal PCI, 1 MS/s, 64-ch, 16-bit Analog Input Board  
(4 K WORD FIFO)



#### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 64 Single-ended/32 Differential Analog Input Channels
- 16-bit ADC with Max. 1 MS/s Sampling Rate
- 4096-sample Hardware FIFO for Analog Input
- AD Trigger Mode: Software, Pacer
- AD Data Transfer: Polling, Interrupt

#### Introduction

PCI-AD64SU is a high-resolution high channel count analog input card for the Universal PCI bus. Its sampling rate is up to 1 MS/s and 16-bit resolution provides the power needed for most data acquisition applications. PCI-AD64SU provides 64 single-ended, 32 differential analog input channels. It also has built in a 4k-sample FIFO buffer for analog input data.

The PCI-AD64SU also includes an onboard Card ID that enables the board to be recognized via software if two or more PCI-AD64SU cards are installed in the same computer.

#### Software

##### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

##### Sample Programs

DOS Lib and TC/BC/MSC Demo       LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

#### Hardware Specifications

Analog Input	
Channels	64 Single-ended/32 Differential
AD Converter	16-bit, 1 µs conversion time
Sampling Rate	Fixed channel: 1 MS/s (Max.) Scan channel: 100 kS/s (Max.)
FIFO Size	4096 Samples
Accuracy	0.1% of FSR ±1 LSB @ 25°C, ±10 V
Bipolar Input	±10V,±5V,±2.5V,±1.25V
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female SCSI II 68-pin x 1
Dimensions (L x W x D)	146 mm X 120.5 mm X 21.6 mm
Power Consumption	1 A @ +5 V (Max.)
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

#### Ordering Information

PCI-AD64SU CR	Universal PCI, 1 MS/s, 64-ch, 16-bit Analog Input Board (4 K WORD FIFO) (RoH)
---------------	---

#### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Diff.	S.E.
AI00	AI00+	68	AI00-	AI01
AI02	AI01+	67	AI01-	AI03
AI04	AI02+	66	AI02-	AI05
AI06	AI03+	65	AI03-	AI07
AI08	AI04+	64	AI04-	AI09
AI10	AI05+	63	AI05-	AI11
AI12	AI06+	62	AI06-	AI13
AI14	AI07+	61	AI07-	AI15
	AGND	60	AGND	
AI16	AI08+	59	AI08-	AI17
AI18	AI09+	58	AI09-	AI19
AI20	AI10+	57	AI10-	AI21
AI22	AI11+	56	AI11-	AI23
AI24	AI12+	55	AI12-	AI25
AI26	AI13+	54	AI13-	AI27
AI28	AI14+	53	AI14-	AI29
AI30	AI15+	52	AI15-	AI31
AI32	AI16+	51	AI16-	AI33
AI34	AI17+	50	AI17-	AI35
AI36	AI18+	49	AI18-	AI37
AI38	AI19+	48	AI19-	AI39
AI40	AI20+	47	AI20-	AI41
AI42	AI21+	46	AI21-	AI43
AI44	AI22+	45	AI22-	AI45
AI46	AI23+	44	AI23-	AI47
	AGND	43	AGND	
AI48	AI24+	42	AI24-	AI49
AI50	AI25+	41	AI25-	AI51
AI52	AI26+	40	AI26-	AI53
AI54	AI27+	39	AI27-	AI55
AI56	AI28+	38	AI28-	AI57
AI58	AI29+	37	AI29-	AI59
AI60	AI30+	36	AI30-	AI61
AI62	AI31+	35	AI31-	AI63
			SCSI 68-pin/DB-68-pin	

#### Accessories

DN-68A CR	DIN-Rail Mountable I/O Connector Block with 68-pin SCSI II Female Connector. (RoHs)
CA-SCSI15-H CR	68-pin SCSI-II Connector Cable, 1.5 m
2AB125R CR	Resistor DIP 125R 0.1% 1/4W MF 50PPM (1PCS)(RoHS)

## PCI-822LU

Universal PCI, 250 kS/s , 32-channel 12-/16-bit AD,  
2-channel 16-bit DA and 32-channel Programmable DI/O  
Multifunction Board



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 32 Single-ended/16 Differential Analog Input Channels
  - 12-bit 250 kS/s High-speed AD
  - Built-in MagicScan Controller
  - Supports Software-trigger and Pacer-trigger
  - 8 K-sample Hardware FIFO
- 2-channel, 16-bit Analog Output
- 32-channel programmable DI/O
  - Pull-high and Pull-low Resistors for DI Channels
  - Supports Digital Output Status Readback (Register Level)

3

1

### Introduction

The PCI-822LU/826LU is a series of multifunction boards that provides high-speed Analog and Digital I/O functions, and features a continuous 250 kS/s, 12- or 16-bit resolution AD converter, an 8-kSample hardware FIFO, a 2-channel, 16-bit DA converter, and 32 programmable Digital I/O channels with DO readback. The PCI-822LU/826LU series provides either 32 single-ended or 16 differential Analog Input channels that are jumper selectable, and is equipped with a high-speed PGA featuring programmable gain (1, 2, 4 or 8).

The PCI-822LU/826LU series also includes an onboard Card ID switch that enables the board to be easily recognized via software if two or more boards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

The PCI-822LU/826LU series includes an AD channel scan function called MagicScan, which eliminates the majority of the effort required to acquire AD values, such as selecting the channel, setting the gain values and the settling time, triggering the ADC, and acquiring the data. Using the built-in MagicScan and the interrupt features, these complex tasks are effectively offloaded from the CPU. Even in MagicScan mode, a different gain code can be used for each channel, and the sampling rate can still reach a total of 250 kS/s, making the PCI-822LU/826LU series especially suitable for high-end applications.

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10     Linux

#### Sample Programs

DOS Lib and TC Demo     LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Hardware Specifications

Analog Input	
Channels	32 Single-ended/16 Differential
Resolution	12-bit
Sampling Rate	250 kS/s Max.
FIFO Size	8192 Samples
Accuracy	0.1% of FSR ±1 LSB @ 25°C, ±10 V
Analog Output	
Channels	2
Resolution	16-bit
Accuracy	±6 LSB
Output Driving	±5 mA
Output Range	±5 V, ±10 V, 0 ~ +10 V, 0 ~ +5 V
Slew Rate	8.33 V/μs
Programmable Digital I/O	
Channels	32
Compatibility	5 V/TTL
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1, 20-pin Box Header x 2
Power Consumption	800 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	●	20	AI_16	01
AI_1	02	●	21	AI_17	02
AI_2	03	●	22	AI_18	03
AI_3	04	●	23	AI_19	04
AI_4	05	●	24	AI_20	05
AI_5	06	●	25	AI_21	06
AI_6	07	●	26	AI_22	07
AI_7	08	●	27	AI_23	08
AI_8	09	●	28	AI_24	09
AI_9	10	●	29	AI_25	10
AI_10	11	●	30	AI_26	11
AI_11	12	●	31	AI_27	12
AI_12	13	●	32	AI_28	13
AI_13	14	●	33	AI_29	14
AI_14	15	●	34	AI_30	15
AI_15	16	●	35	AI_31	16
A.GND	17	●	36	Da2 out	17
Da1 out	18	●	37	D.GND	18
Ext_Trig	19	●			
				CON1	
				CON2	
				CON3	

### Ordering Information

<b>PCI-822LU CR</b>	Universal PCI, 250 kS/s, 32-channel 12-bit Analog Input, 2-channel 16-bit Analog Output and 32-channel Programmable DI/O (RoHS). Includes one CA-4002 D-sub connector.
---------------------	--

**PCI-826LU**

**Universal PCI, 250 kS/s , 32-channel 12-/16-bit AD,  
2-channel 16-bit DA and 32-channel Programmable DI/O Multifunction Board**



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
  - Supports Card ID (SMD Switch)
  - 32 Single-ended/16 Differential Analog Input Channels
    - 16-bit 250 kS/s High-speed AD
    - Built-in MagicScan Controller
    - Supports Software-trigger and Pacer-trigger
    - 8 K-sample Hardware FIFO
  - 2-channel, 16-bit Analog Output
  - 32-channel programmable DI/O
    - Pull-high and Pull-low Resistors for DI Channels
    - Supports Digital Output Status Readback (Register Level)

 Introduction

The PCI-822LU/826LU is a series of multifunction boards that provides high-speed Analog and Digital I/O functions, and features a continuous 250 kS/s, 12- or 16-bit resolution AD converter, an 8-KSample hardware FIFO, a 2-channel, 16-bit DA converter, and 32 programmable Digital I/O channels with DO readback. The PCI-822LU/826LU series provides either 32 single-ended or 16 differential Analog Input channels that are jumper selectable, and is equipped with a high-speed PGA featuring programmable gain (1, 2, 4 or 8).

The PCI-822LU/826LU series also includes an onboard Card ID switch that enables the board to be easily recognized via software if two or more boards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

The PCI-822LU/826LU series includes an AD channel scan function called MagicScan, which eliminates the majority of the effort required to acquire AD values, such as selecting the channel, setting the gain values and the settling time, triggering the ADC, and acquiring the data. Using the built-in MagicScan and the interrupt features, these complex tasks are effectively offloaded from the CPU. Even in MagicScan mode, a different gain code can be used for each channel, and the sampling rate can still reach a total of 250 kS/s, making the PCI-822LU/826LU series especially suitable for high-end applications.

 Software

## Drivers

 32/64-bit Windows XP/2003/2008/7/



## Sample Programs

 DOS Lib and TC Demo



VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

<b>Analog Input</b>	
Channels	32 Single-ended/16 Differential
Resolution	16-bit
Sampling Rate	250 kS/s Max.
FIFO Size	8192 Samples
Accuracy	0.1% of FSR $\pm 1$ LSB @ 25°C, $\pm 10$ V
<b>Analog Output</b>	
Channels	2
Resolution	16-bit
Accuracy	$\pm 6$ LSB
Output Driving	$\pm 5$ mA
Output Range	$\pm 5$ V, $\pm 10$ V, 0 ~ +10 V, 0 ~ +5 V
Slew Rate	8.33 V/ $\mu$ s
<b>Programmable Digital I/O</b>	
Channels	32
Compatibility	5 V/TTL
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V
<b>General</b>	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1, 20-pin Box Header x 2
Power Consumption	800 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

1

## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment
AI_0	01	20 AI_16	PB 0 01
AI_1	02	21 AI_17	PB 2 03
AI_2	03	22 AI_18	PB 4 05
AI_3	04	23 AI_19	PB 6 07
AI_4	05	24 AI_20	PB 8 09
AI_5	06	25 AI_21	PB 10 11
AI_6	07	26 AI_22	PB 12 13
AI_7	08	27 AI_23	PB 14 15
AI_8	09	28 AI_24	GND 17
AI_9	10	29 AI_25	+5 V 19
AI_10	11	30 AI_26	
AI_11	12	31 AI_27	
AI_12	13	32 AI_28	
AI_13	14	33 AI_29	
AI_14	15	34 AI_30	
AI_15	16	35 AI_31	
A.GND	17	36 Da2 out	
Da1 out	18	37 D.GND	
Ext_Trig	19		
			CON1
Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment
PA 0	01	O O	02 PA 1
PA 2	03	O O	04 PA 3
PA 4	05	O O	06 PA 5
PA 6	07	O O	08 PA 7
PA 8	09	O O	10 PA 9
PA 10	10	O O	12 PA 11
PA 12	12	O O	14 PA 13
PA 14	14	O O	16 PA 15
GND	16	O O	18 GND
+5 V	18	O O	20 +12 V
			CON2



## Ordering Information

**PCI-826LU CR** Universal PCI, 250 kS/s, 32-channel 16-bit Analog Input, 2-channel 16-bit Analog Output and 32-channel Programmable DI/O (RoHS). Includes one CA-4002 D-sub connector.

# PCI-1802LU/PCI-1802HU

Universal PCI, 32-channel, 12-bit, 330 or 44 kS/s  
Multifunction Board (8 K word FIFO)



## Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 2-channel, 12-bit Analog Output
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
- Pull-high and Pull-low Resistors for DI Channels

- 32 Single-ended/16 Differential Analog Input Channels
- 12-bit, 330 kS/s or 44 kS/s AD Converter
- Built-in MagicScan Controller
- Internal Trigger: Software-trigger, Pacer-trigger
- External Trigger: Post-trigger, Pre-trigger, Middle-trigger
- High-speed data transfer rate up to 2.7 M words/sec.

## 3 Introduction

The PCI-1802LU/HU card is designed as an easy replacement for the PCI-1802L/H without requiring any modification to the software or the driver.

The PCI-1802LU/HU is a high-performance multifunction card that provides high-speed Analog and Digital I/O functions. The PCI-1802LU/HU is based on the Universal PCI interface, supporting both the 3.3 V and the 5 V PCI bus, and features a continuous 330 kS/s or 44 kS/s 12-bit resolution AD converter, an 8 K-sample hardware FIFO, a MagicScan controller (for multi-channel scanning), a 2-channel 12-bit DA converter, and 16-channel Digital Input and 16-channel Digital Output.

The PCI-1802LU/HU provides either 32-channel single-ended or 16-channel differential Analog Inputs that are jumper selectable, and a programmable high-speed PGA that is equipped for gain controls (0.5/1/2/4/8 for Low Gain, and 0.5/1/5/10/50/100/500/1000 for High Gain).

The PCI-1802LU/HU also includes an onboard Card ID switch and pull-high/pull-low DI resistors. The Card ID enables the board to be recognized via software if two or more PCI-1802LU/HU cards are installed in the same computer. The pull-high/pull-low resistors allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.



## Pin Assignments

Pin Assignment		Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
AI_0	01			01	DO 0
AI_1	02	20	AI_16	02	DO 1
AI_2	03	21	AI_17	03	DO 2
AI_3	04	22	AI_18	05	DO 4
AI_4	05	23	AI_19	07	DO 6
AI_5	06	24	AI_20	09	DO 8
AI_6	07	25	AI_21	10	DO 10
AI_7	08	26	AI_22	12	DO 12
AI_8	09	27	AI_23	14	DO 14
AI_9	10	28	AI_24	16	DO 16
AI_10	11	29	AI_25	18	DO 18
AI_11	12	30	AI_26	19	DO 20
AI_12	13	31	AI_27		
AI_13	14	32	AI_28	01	DI 0
AI_14	15	33	AI_29	03	DI 2
AI_15	16	34	AI_30	05	DI 4
A.GND	17	35	AI_31	07	DI 6
Da1 out	18	36	Da2 out	09	DI 8
Ext_Trig	19	37	D.GND	11	DI 10
				13	DI 12
				15	DI 14
				17	GND
				19	+5 V
					+12 V

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

Model	PCI-1802LU	PCI-1802HU
<b>Analog Input</b>		
Channels	32 Single-ended/16 Differential	
AD Conversion	12-bit, 3 $\mu$ s Conversion Time	
Accuracy	0.01% of FSR $\pm 1$ LSB @ 25 °C, $\pm 10$ V	
FIFO Size	8192 Samples	
Sampling Rate	330 kS/s	44 kS/s
<b>Analog Output</b>		
Channels	2	
Resolution	12-bit	
Accuracy	0.06% of FSR $\pm 1$ LSB @ 25°C, $\pm 10$ V	
Output Driving	$\pm 5$ mA	
Output Range	$\pm 5$ V, $\pm 10$ V	
<b>Digital I/O</b>		
Channels	DI DO	16, 5 V/TTL 16, 5 V/TTL
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V	
<b>Timer/Counter</b>		
Channels	3	
Resolution	16-bit	
Input Frequency	10 MHz Max.	
Reference Clock	Internal: 8 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	300 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## Ordering Information

<b>PCI-1802LU CR</b>	Universal PCI, 32-channel, 12-bit, 330 kS/s Low Gain Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PCI-1802HU CR</b>	Universal PCI, 32-channel, 12-bit, 44 kS/s High Gain Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.



# PCI-1602U/PCI-1602FU

Universal PCI, 32-channel, 16-bit, 100 or 200 kS/s  
Multifunction Board (8 K word FIFO)



## Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 2-channel, 12-bit Analog Output
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
  - Pull-high and Pull-low Resistors for DI Channels

- 32 Single-ended/16 Differential Analog Input Channels
  - 12-bit, 100 kS/s or 200 kS/s AD Converter
  - Built-in MagicScan Controller
  - Internal Trigger: Software-trigger, Pacer-trigger
  - External Trigger: Post-trigger, Pre-trigger, Middle-trigger
- High-speed data transfer rate up to 2.1 M words/sec.

## Introduction

3

2

The PCI-1602U/FU is a high-performance multifunction card providing high-speed Analog and Digital I/O functions. The PCI-1602U/FU is based on the Universal PCI interface, supporting both the 3.3 V and the 5 V PCI bus, and features a continuous 100 kS/s (200 kS/s for the F version) 16-bit resolution AD converter, an 8 K-sample hardware FIFO, a MagicScan controller (for multi-channel scanning), a 2-channel 16-bit DA converter, and 16-channel Digital Input and 16-channel Digital Output.

The PCI-1602U/FU provides either 32-channel single-ended or 16-channel differential Analog Inputs that are jumper selectable, and a programmable high-speed PGA that is equipped for gain controls (1, 2, 4 and 8). The PCI-1602U/FU is fully compatible with the PCI-1602/F, and is designed as a direct replacement without requiring any modification to the software or the driver.

The PCI-1602U/FU also includes an onboard Card ID switch that enables the board to be recognized via software if two or more PCI-1602U/FU cards are installed in the same computer. The pull-high/low resistors allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Hardware Specifications

Model	PCI-1602U	PCI-1602FU
<b>Analog Input</b>		
Channels	32 Single-ended/16 Differential	
AD Conversion	16-bit, 2 µs Conversion Time	
Accuracy	0.01% of FSR ±1 LSB @ 25 °C, ±10 V	
FIFO Size	8192 Samples	
Sampling Rate	100 kS/s	200 kS/s
<b>Analog Output</b>		
Channels	2	
Resolution	12-bit	
Accuracy	0.06% of FSR ±1 LSB @ 25°C, ±10 V	
Output Driving	±5 mA	
Output Range	Bipolar: ±5 V, ±10 V	
<b>Digital I/O</b>		
Channels	DI DO	16, 5 V/TTL 16, 5 V/TTL
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V	
<b>Timer/Counter</b>		
Channels	3	
Resolution	16-bit	
Input Frequency	10 MHz Max.	
Reference Clock	Internal: 8 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	300 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



## Ordering Information

<b>PCI-1602U CR</b>	Universal PCI, 32-channel 16-bit, 100 kS/s Low Gain, Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub connector
<b>PCI-1602FU CR</b>	Universal PCI, 32-channel 16-bit, 200 kS/s Low Gain, Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub connector

## PCI-1202LU/PCI-1202HU

Universal PCI, 32-channel, 12-bit, 110 or 44 kS/s  
Multifunction Board (1 K word FIFO)



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 2-channel, 16-bit Analog Output
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
- Pull-high and Pull-low Resistors for DI Channels

- 32 Single-ended/16 Differential Analog Input Channels
  - 12-bit, 110 kS/s or 44 kS/s AD Converter
  - Built-in MagicScan Controller
  - Internal Trigger: Software-trigger, Pacer-trigger
  - External Trigger: Post-trigger, Pre-trigger, Middle-trigger
- High-speed data transfer rate up to 2.1 M words/sec.

### Introduction

The PCI-1202 series is a family of high performance data acquisition boards that feature continuous gap-free data acquisition in DOS at 110 kHz for low gain or 44 kHz for high gain. The PCI-1202 family has the same hardware architecture as the PCI-1802, and provides 32-channel single-ended or 16-channel differential Analog Inputs. As with the PCI-1802 family, the PCI-1202 series features both the Magic Scan and Continuous Capture functions.

The PCI-1202LU/HU Universal PCI card supports both the 3.3 V and the 5 V PCI bus. The PCI-1202LU/HU cards are fully compatible with PCI-1202L/H cards and are designed as direct replacements without requiring any modification to the software or the driver, with the main difference being the addition of DI pull-high/low resistors and a Card ID switch on the PCI-1202LU/HU.

The PCI-1202LU/8K and PCI-1202HU/8K cards are equipped with an 8K-sample hardware FIFO that reduces data overflow issues in multi-tasking environments such as Windows and Linux.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	
AI_1	02	20 AI_16
AI_2	03	21 AI_17
AI_3	04	22 AI_18
AI_4	05	23 AI_19
AI_5	06	24 AI_20
AI_6	07	25 AI_21
AI_7	08	26 AI_22
AI_8	09	27 AI_23
AI_9	10	28 AI_24
AI_10	11	29 AI_25
AI_11	12	30 AI_26
AI_12	13	31 AI_27
AI_13	14	32 AI_28
AI_14	15	33 AI_29
AI_15	16	34 AI_30
A.GND	17	35 AI_31
Da1 out	18	36 Da2 out
Ext_Trig	19	37 D.GND

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	○ ○ 02 DO 1
DO 2	03	○ ○ 04 DO 3
DO 4	05	○ ○ 06 DO 5
DO 6	07	○ ○ 08 DO 7
DO 8	09	○ ○ 10 DO 9
DO 10	10	○ ○ 12 DO 11
DO 12	12	○ ○ 14 DO 13
DO 14	14	○ ○ 16 DO 15
GND	16	○ ○ 18 GND
+5 V	18	○ ○ 20 +12 V
		CON1

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	○ ○ 02 DI 1
DI 2	03	○ ○ 04 DI 3
DI 4	05	○ ○ 06 DI 5
DI 6	07	○ ○ 08 DI 7
DI 8	09	○ ○ 10 DI 9
DI 10	11	○ ○ 12 DI 11
DI 12	13	○ ○ 14 DI 13
DI 14	15	○ ○ 16 DI 15
GND	17	○ ○ 18 GND
+5 V	19	○ ○ 20 +12 V
		CON2

3

2

### Ordering Information

PCI-1202LU CR	Universal PCI, 32-channel 12-bit, 110 kS/s Low Gain, Multifunction DAQ Board (1 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.
PCI-1202HU CR	Universal PCI, 32-channel 12-bit, 44 kS/s High Gain, Multifunction DAQ Board (1 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.

PCI-1202LU/8K CR	Universal PCI, 32-channel 12-bit, 110 kS/s Low Gain, Multifunction DAQ Board (8 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.
PCI-1202HU/8K CR	Universal PCI, 32-channel 12-bit, 44 kS/s High Gain, Multifunction DAQ Board (8 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.

# PCI-1002LU/PCI-1002HU

Universal PCI, 32-channel, 12-bit, 110 or 44 kS/s

Multifunction Board



## Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 32 Single-ended/16 Differential Analog Input Channels
  - 12-bit, 110 kS/s or 44 kS/s AD Converter
  - Internal Pacer-trigger
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
  - Pull-high and Pull-low Resistors for DI Channels
- Supports Card ID (SMD Switch)

## Introduction

The PCI-1002LU/HU card is designed as an easy replacement for the PCI-1002L/H without requiring any modification to the software or the driver.

The PCI-1002LU/PCI-1002HU is an AD board that supports both the 3.3 V and the 5 V PCI bus and features low gain Analog Input at 110 kS/s or high gain at 44 kS/s. The PCI-1002LU/PCI-1002HU provides 32 single-ended or 16 differential 12-bit Analog Input channels, 16 Digital Input channels, and 16 Digital Output channels. The pull-high/low resistors allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

3

2

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux  DASYLab

### Sample Programs

- DOS Lib and TC/BC/MSC Demo  LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

Model	PCI-1002LU	PCI-1002HU
<b>Analog Input</b>		
Channels	32 Single-ended/16 Differential	
A/D Converter	12-bit, 8 $\mu$ s Conversion Time	
Accuracy	0.01% of FSR $\pm 2$ LSB @ 25 °C, $\pm 10$ V	
Sampling Rate	110 kS/s	44 kS/s
<b>Digital Inputs</b>		
Channels	16	
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.	
Response Speed	1.0 MHz (Typical)	
<b>Digital Outputs</b>		
Channels	16	
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V	
Response Speed	1.0 MHz (Typical)	
<b>Timer/Counter</b>		
Channels	3	
Resolution	16-bit	
Input Frequency	10 MHz Max.	
Reference Clock	Internal: 4 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	800 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	20 AI_16
AI_1	02	21 AI_17
AI_2	03	22 AI_18
AI_3	04	23 AI_19
AI_4	05	24 AI_20
AI_5	06	25 AI_21
AI_6	07	26 AI_22
AI_7	08	27 AI_23
AI_8	09	28 AI_24
AI_9	10	29 AI_25
AI_10	11	30 AI_26
AI_11	12	31 AI_27
AI_12	13	32 AI_28
AI_13	14	33 AI_29
AI_14	15	34 AI_30
AI_15	16	35 AI_31
A.GND	17	36 N.C.
N.C.	18	37 D.GND
Ext_Trig	19	

CON3

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	02 DI 1
DI 2	03	04 DI 3
DI 4	05	06 DI 5
DI 6	07	08 DI 7
DI 8	09	10 DI 9
DI 10	11	12 DI 11
DI 12	13	14 DI 13
DI 14	15	16 DI 15
GND	17	18 GND
+5 V	19	20 +12 V

CON2

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	02 DO 1
DO 2	03	04 DO 3
DO 4	05	06 DO 5
DO 6	07	08 DO 7
DO 8	09	10 DO 9
DO 10	10	12 DO 11
DO 12	12	14 DO 13
DO 14	14	16 DO 15
GND	16	18 GND
+5 V	18	20 +12 V

CON1



## Ordering Information

<b>PCI-1002LU CR</b>	Universal PCI, 32-channel 12-bit, 110 kS/s Low Gain, Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PCI-1002UH CR</b>	Universal PCI, 32-channel, 12-bit, 44 kS/s High Gain, Multifunction DAQ Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PCI-1002LU/S CR</b>	PCI-1002LU with DB-1825 Daughterboard and Cable (RoHS). Includes one CA-3710 D-sub Cable.
<b>PCI-1002UH/S CR</b>	PCI-1002HU with DB-1825 Daughterboard and Cable (RoHS). Includes one CA-3710 D-sub Cable.

## PIO-821LU/PIO-821HU

Universal PCI, 16-channel, 12-bit, 45 kS/s Multifunction Board



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 16 Single-ended/8 Differential Analog Input Channels
  - 12-bit, 45 kS/s AD Converter
  - AD Trigger: Software-trigger, Pacer-trigger, External-trigger
  - Interrupt Handling
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
  - Pull-high and Pull-low Resistors for DI Channels
- 1-channel, 12-bit Analog Output
- Supports Card ID (SMD Switch)

### Introduction

The PIO-821LU/HU card is designed as an easy replacement for the PIO-821L/H without requiring any modification to the software or the driver.

The PIO-821LU/HU is a multifunction board for PC/AT compatible computers. The PIO-821LU provides for low gain (1, 2, 4, 8), and the PIO-821HU supports high gain (1, 10, 100, 1000). The PIO-821L/H contains a 12-bit ADC with up to 16 single-ended or 8 differential Analog Input channels. The cards also have a 12-bit DAC voltage output and 16 TTL-compatible Digital Input and Digital Output channels, respectively. The maximum sampling rate for the AD converter is around 45 kS/s.

The PIO-821LU/HU also includes an onboard Card ID switch and pull-high/low DI resistors. The Card ID enables the board to be recognized via software if two or more PIO-821LU/HU cards are installed in the same computer. The pull-high/pull-low resistors allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

### Software

Drivers	
<input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10	<input checked="" type="checkbox"/> Linux
Sample Programs	
<input checked="" type="checkbox"/> DOS Lib and TC Demo	<input checked="" type="checkbox"/> LabVIEW Toolkit
<input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo	

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	20 AI_8
AI_1	02	21 AI_9
AI_2	03	22 AI_10
AI_3	04	23 AI_11
AI_4	05	24 AI_12
AI_5	06	25 AI_13
AI_6	07	26 AI_14
AI_7	08	27 AI_15
A.GND	09	28 A.GND
A.GND	10	29 A.GND
N.C.	11	30 DAOUT
N.C.	12	31 N.C.
+12V	13	32 GATE0
A.GND	14	33 N.C.
D.GND	15	34 GATE2
COUT0	16	35 COUT2
N.C.	17	36 EXT_INT
COUT1	18	37 EXT_CLK
VCC	19	
		CON3
Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	02 DI 1
DI 2	03	04 DI 3
DI 4	05	06 DI 5
DI 6	07	08 DI 7
DI 8	09	10 DI 9
DI 10	11	12 DI 11
DI 12	13	14 DI 13
DI 14	15	16 DI 15
GND	17	18 GND
+5 V	19	20 +12 V
		CON1
Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	02 DO 1
DO 2	03	04 DO 3
DO 4	05	06 DO 5
DO 6	07	08 DO 7
DO 8	09	10 DO 9
DO 10	10	12 DO 11
DO 12	12	14 DO 13
DO 14	14	16 DO 15
GND	16	18 GND
+5 V	18	20 +12 V
		CON2



### Hardware Specifications

Model	PIO-821LU	PIO-821HU
<b>Analog Input</b>		
Channels	16 Single-ended/8 Differential	
AD Conversion	12-bit, 8 µs Conversion Time	
Accuracy	0.01% of FSR ±1 LSB @ 25 °C, ±10 V	
Sampling Rate	45 kS/s	
<b>Analog Output</b>		
Channels	2	
Resolution	12-bit	
Accuracy	0.01% of FSR ±1/2 LSB @ 25°C, ±10 V	
Output Driving	±5 mA	
Output Range	Unipolar: 0 ~ +5 V, 0 ~ +10 V, 0 ~ Ext Ref	
<b>Digital I/O</b>		
Channels	DI DO	16, 5 V/TTL 16, 5 V/TTL
Input Voltage		Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.
Output Voltage		Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.
Output Capability		Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V
Response Speed		1.2 MHz (Typical)
<b>Timer/Counter</b>		
Channels		3
Resolution		16-bit
Input Frequency		10 MHz Max.
Reference Clock		Internal: 2 MHz
<b>General</b>		
Bus Type		3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID		Yes (4-bit)
Connectors		Female DB37 x 1, 20-pin Box Header x 2
Power Consumption		960 mA @ +5 V
Operating Temperature		0°C to +60°C
Humidity		5 to 85% RH, Non-condensing



### Ordering Information

<b>PIO-821LU CR</b>	Universal PCI, 16-channel, 12-bit, 45 kS/s Low Gain, Multifunction DAQ Board.
<b>PIO-821HU CR</b>	Universal PCI, 16-channel, 12-bit, 45 kS/s High Gain, Multifunction DAQ Board.

# PISO-813U

Universal PCI, 32-channel, 12-bit, 10 kS/s Isolated AD Board



## Features >>>

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>■ Universal PCI (3.3 V/5 V) Interface</li> <li>■ 32 Single-ended Analog Input Channels           <ul style="list-style-type: none"> <li>□ Bipolar Input: <math>\pm 0.625</math> V, <math>\pm 1.25</math> V, <math>\pm 2.5</math> V, <math>\pm 5</math> V, <math>\pm 10</math> V</li> <li>□ Unipolar Input: 0 ~ <math>+0.625</math> V, 0 ~ <math>+1.25</math> V, 0 ~ <math>+2.5</math> V, 0 ~ <math>+5</math> V, 0 ~ <math>+10</math> V</li> </ul> </li> <li>■ Programmable Gain Control: 1, 2, 4, 8, 16</li> </ul> | <ul style="list-style-type: none"> <li>□ AD Trigger: Software-trigger</li> <li>□ 12-bit, 10 kS/s AD Converter</li> <li>□ 3750 V<sub>rms</sub> Bus Isolation Protection</li> <li>□ Built-in DC/DC Converter with 3000 V<sub>DC</sub> Protection</li> <li>■ Supports Card ID (SMD Switch)</li> </ul> |
|---|--|

## Introduction

3

2

The PISO-813U card is designed as an easy replacement for the PISO-813 without requiring any modification to the software or the driver.

The PISO-813U is a bus-type isolated 12-bit AD board that supports both the 3.3 V and the 5 V PCI bus and features 10 kHz data acquisitions under both DOS and Windows, and provides 32 single-ended Analog Input channels. The isolation range of the board has been increased to 3000 V, making it the most cost effective solution when considering isolated AD boards for the PCI bus.

The PISO-813U also includes an onboard Card ID that enables the board to be recognized via software if two or more PISO-813U cards are installed in the same computer.

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10     Linux     DASYLab

### Sample Programs

- DOS Lib and TC/BC/MSC Demo     LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Hardware Specifications

Analog Input	
Isolation Voltage	3750 V <sub>rms</sub> (Bus Type)
Channels	32 Single-ended
A/D Converter	12-bit, 8 $\mu$ s Conversion Time
Accuracy	0.01% of FSR $\pm 1$ LSB @ 25°C, $\pm 10$ V
Sampling Rate	10 kS/s
Input Impedance	10 M $\Omega$ /6 pF
Trigger Modes	Software
Data Transfer	Polling
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1
Power Consumption	850 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



## Pin Assignments


Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	
AI_2	20	AI_1
AI_4	02	AI_3
AI_6	21	AI_5
AI_8	03	AI_7
AI_10	22	AI_9
AI_12	05	AI_11
AI_14	24	AI_13
A.GND	06	
A.GND	26	AI_15
AI_16	09	A.GND
AI_18	27	AI_17
AI_20	11	AI_19
AI_22	28	AI_21
AI_24	12	AI_23
AI_26	29	AI_25
AI_28	13	AI_27
AI_30	30	AI_29
A.GND	14	AI_31
	31	
	32	
	33	
	34	
	35	
	36	
	37	
		CON1



## Ordering Information

PISO-813U CR	Universal PCI, 12-bit, 10 kS/s, 32-channel Isolated Analog Input Board (RoHS). Includes one CA-4002 D-sub connector.
PISO-813U/S CR	PISO-813U CR with DB-8325 daughterboard. Includes one CA-4002 D-sub connector.

### 3-3 Analog Output Boards

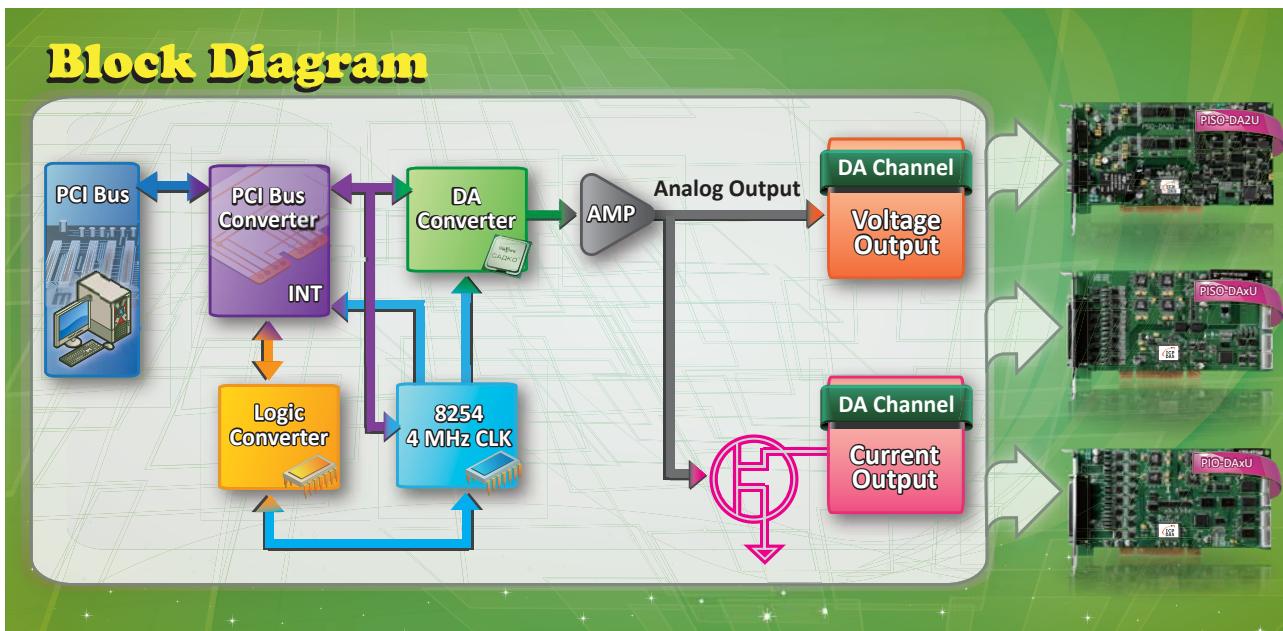

Selection Guide

Model	PISO-DA2U	PISO-DA4U	PISO-DA8U	PISO-DA16U	PIO-DA4U	PIO-DA8U	PIO-DA16U
Interface	Universal PCI						
<b>Analog Output</b>							
Channels	2	4	8	16	4	8	16
Resolution	12-bit	14-bit	14-bit	14-bit	14-bit	14-bit	14-bit
Isolation Voltage	3750 V <sub>DC</sub>	2500 V <sub>DC</sub>	2500 V <sub>DC</sub>	2500 V <sub>DC</sub>	-	-	-
Isolation Type	Bus Type, cH-to-cH	Bus Type	Bus Type	Bus Type	-	-	-
Built-in DC/DC Converter	3000 V <sub>DC</sub>	3000 V <sub>DC</sub>	3000 V <sub>DC</sub>	3000 V <sub>DC</sub>	-	-	-
Output Voltage	±5 V ±10 V 0 ~ +5 V 0 ~ +10 V	±10 V	±10 V	±10 V	±10 V	±10 V	±10 V
Output Current	0 ~ +20 mA +4 ~ +20 mA	0 ~ +20 mA	0 ~ +20 mA	0 ~ +20 mA	0 ~ +20 mA	0 ~ +20 mA	0 ~ +20 mA
Output Driving	±5 mA	±5 mA	±5 mA	±5 mA	±5 mA	±5 mA	±5 mA
<b>Digital I/O</b>							
DI Channels	-	16	16	16	16	16	16
DO Channels	-	16	16	16	16	16	16
Compatibility	-	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL	5 V/TTL
<b>Timer/Counter</b>							
Channels	-	3	3	3	3	3	3
Resolution	-	16-bit	16-bit	16-bit	16-bit	16-bit	16-bit
Clock Source	-	4 MHz	4 MHz	4 MHz	4 MHz	4 MHz	4 MHz

## PISO-DA2U

Universal PCI, 12-bit, 2-channel Isolated Analog Output Board



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 12-bit, 2-channel Analog Output
  - 3750 V<sub>DC</sub> Bus and Channel Isolation Protection
  - 3000 V<sub>DC</sub> Power Isolation Protection
  - Unipolar or Bipolar Analog Output
- Software Calibration
- Two Timer-triggered Interrupt Sources
- Calibration data stored in EEPROM
- Double-buffered DA Latch
- Supports Card ID (SMD Switch)

### Introduction

3

2

The PISO-DA2U has 2 Analog Output channels with high-voltage isolation protection and is based on the Universal PCI interface (3.3 V/5V). The PISO-DA2U is fully compatible with the PISO-DA2, and is designed as a direct replacement without requiring any modification to the software or the driver.

The built-in high-quality isolation components on the PISO-DA2U provide 3750 V<sub>DC</sub> bus-type and channel-to-channel isolation, and offer durable abilities. The voltage output range for the PISO-DA2U can be set to ±10 V, ±5 V, 0 to 10 V, or 0 to 5 V, and the current output range can be either 0 to 20 mA or 4 to 20 mA.

In addition, the PISO-DA2U also features the following innovative advantages:

#### 1. Accurate and easy-to-use calibration:

ICP DAS provides a software calibration function rather than manual calibration so that jumpers and trim-pots are no longer required for calibration, and the calibration data can be saved in the EEPROM for long-term use.

#### 2. Channel-to-channel configuration:

Each channel can be individually configured as either voltage or current output and can be set to a different output range.

#### 3. Card ID:

ICP DAS has also included an onboard Card ID switch on the PISO-DA2U that enables the board to be recognized via software if two or more boards are installed in the same computer.



### Pin Assignments

Pin Assignment			Pin Assignment		
GND	05		09	+15 V	
GND	04		08	GND	
ExtREF V Int	03		07	I OUT	
GND	02		06	GND	
V OUT	01				
		CN1			

Pin Assignment			Pin Assignment		
GND	05		09	+15 V	
GND	04		08	GND	
ExtREF V Int	03		07	I OUT	
GND	02		06	GND	
V OUT	01				
		CN2			

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10     Linux

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo     LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Hardware Specifications

Analog Output					
Channels	2				
Isolation Voltage	3750 V (Bus Type, Channel-to-Channel)				
Resolution	12-bit				
Accuracy	0.015% of FSR ±1/2 LSB @ 25°C, ±10 V				
Output Range	<table border="1"> <tr> <td>Voltage</td><td>±10 V, ±5 V, 0 ~ +10 V, 0 ~ +5 V</td></tr> <tr> <td>Current</td><td>0 ~ +20 mA, +4 ~ +20 mA</td></tr> </table>	Voltage	±10 V, ±5 V, 0 ~ +10 V, 0 ~ +5 V	Current	0 ~ +20 mA, +4 ~ +20 mA
Voltage	±10 V, ±5 V, 0 ~ +10 V, 0 ~ +5 V				
Current	0 ~ +20 mA, +4 ~ +20 mA				
Output Driving	±5 mA				
Slew Rate	0.15 V/μs				
Output Impedance	0.1 Ω Max.				
General					
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz				
Card ID	Yes (4-bit)				
Connectors	Male DB9 x 2				
Power Consumption	1350 mA @ +5 V				
Operating Temperature	0°C to +60°C				
Humidity	5 to 85% RH, Non-condensing				



### Ordering Information

PISO-DA2U CR	Universal PCI, 12-bit, 2-channel Isolated Analog Output Board (RoHS). Includes two CA-PC09M D-sub Connectors.
PISO-DA2U/S	PISO-DA2U with DB-8425 daughterboard.

# PISO-DA4U/DA8U/DA16U

Universal PCI, 14-bit, 4/8/16-channel Isolated Analog Output Board



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 14-bit, 4/8/16-channel Analog Output
  - 2500 V<sub>DC</sub> Bus and Power Isolation Protection
  - Built-in DC/DC Converter with 3000 V<sub>DC</sub> Protection
  - Software Calibration
  - Two Timer-triggered Interrupt Sources
- Double-buffered DA Latch
- Supports Card ID (SMD Switch)
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
  - Pull-high and Pull-low Function for DI Channels

## Introduction

The PISO-DA4U/DA8U/DA16U card is designed as an easy replacement for the PIO-DA4/DA8/DA16 without requiring any modification to the software or the driver.

The PISO-DA4U/DA8U/DA16U series provides an additional high-voltage isolation design that protects the Host PC from damage due to unexpected power surges, while the built-in high-quality isolation components provide the boards with 2500 V<sub>DC</sub> bus-type isolation. The voltage output range for the PISO-DA4U/DA8U/DA16U series is from -10 V to +10 V, and the current output range is from 0 to 20 mA.

In addition, the PISO-DA4U/DA8U/DA16U series also features the following innovative advantages:

### 1. Accurate and easy-to-use calibration:

ICP DAS provides a software calibration function rather than manual calibration so that jumpers and trim-pots are no longer required for calibration, and the calibration data can be saved in the EEPROM for long-term use.

### 2. Individual channel configuration:

Each channel can be individually configured as either voltage or current output.

### 3. Card ID:

ICP DAS has also included an onboard Card ID switch on the PISO-DAxU series that enables the board to be recognized via software if two or more boards are installed in the same computer.



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
VO_0	01			01	O O
VO_1	02	IO_0		02	DO 1
VO_2	03	21	IO_1	03	O O
VO_3	04	22	IO_2	04	DO 3
A.GND	05	23	IO_3	05	O O
VO_4	06	24	A.GND	06	DO 5
VO_5	07	25	IO_4	07	O O
VO_6	08	26	IO_5	08	DO 7
VO_7	09	27	IO_6	09	O O
A.GND	10	28	IO_7	10	DO 9
VO_8	11	29	A.GND	11	O O
VO_9	12	30	IO_8	12	DO 11
VO_10	13	31	IO_9	13	O O
VO_11	14	32	IO_10	14	DO 13
A.GND	15	33	IO_11	15	O O
VO_12	16	34	IO_12	16	DO 15
VO_13	17	35	IO_13	17	O O
VO_14	18	36	IO_14	18	GND
VO_15	19	37	IO_15	19	O O

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	O O
DI 2	03	O O
DI 4	05	O O
DI 6	07	O O
DI 8	09	O O
DI 10	10	O O
DI 12	12	O O
DI 14	14	O O
GND	16	O O
+5V	18	O O

CON1

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	O O
DI 2	03	O O
DI 4	05	O O
DI 6	07	O O
DI 8	09	O O
DI 10	10	O O
DI 12	12	O O
DI 14	14	O O
GND	16	O O
+5V	18	O O

CON2

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Hardware Specifications

Model	PISO-DA4U	PISO-DA8U	PISO-DA16U
<b>Analog Output</b>			
Channels	4	8	16
Isolation Voltage	2500 V <sub>DC</sub> (Bus Type)		
Resolution	14-bit		
Accuracy	0.04% of FSR ±2 LSB @ 25°C, ±10 V		
Output Driving	±5 mA		
Output Range	Voltage ±10 V		
	Current 0 ~ +20 mA		
Output Impedance	0.1 Ω Max.		
<b>Digital I/O</b>			
Channels	DI 16, 5 V/TTL		
	DO 16, 5 V/TTL		
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.		
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.		
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V		
<b>Timer/Counter</b>			
Channels	3		
Resolution	16-bit		
Input Frequency	10 MHz Max.		
Reference Clock	Internal: 4 MHz		
<b>General</b>			
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz		
Card ID	Yes (4-bit)		
Connectors	Female DB37 x 1, 20-pin Box Header x 2		
Power Consumption	2200 mA @ +5 V	2400 mA @ +5 V	3000 mA @ +5 V
Operating Temperature	0°C to +60°C		
Humidity	5 to 85% RH, Non-condensing		



## Ordering Information

<b>PISO-DA4U CR</b>	Universal PCI, 4-channel Isolated DA Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PISO-DA8U CR</b>	Universal PCI, 8-channel Isolated DA Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PISO-DA16U CR</b>	Universal PCI, 16-channel Isolated DA Board (RoHS). Includes one CA-4002 D-sub Connector.

## **PIO-DA4U/DA8U/DA16U**

Universal PCI, 14-bit, 4/8/16-channel Analog Output Board



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
  - 14-bit, 4/8/16-channel Analog Output
    - Software Calibration
    - Two Timer-triggered Interrupt Sources
    - Double-buffered DA Latch

- 16-channel 5 V/TTL Digital Output
  - 16-channel 5 V/TTL Digital Input
    - Pull-high and Pull-low Function for DI Channels
  - Supports Card ID (SMD Switch)



## Introduction

The PIO-DA4U/DA8U/DA16U series cards are compatible with the PCI versions of the PIO-DA4/DA8/DA16 cards and, in most cases, the PIO-DA4U/DA8U/DA16U series can be used as a direct replacement for the PIO-DA4/DA8/DA16 series without requiring any modification to the software or the driver.

The voltage output range for the PIO-DA4U/DA8U/DA16U series is from -10 V to +10 V, and the current output range is from 0 to 20 mA.

In addition, the PIO-DA4U/DA8U/DA16U series also features the following innovative advantages:

#### **1. Accurate and easy-to-use calibration:**

**1. Accurate and easy-to-use calibration:**  
ICP DAS provides a software calibration function rather than manual calibration so that jumpers and trim-pots are no longer required for calibration, and the calibration data can be saved in the EEPROM for long-term use.

## 2. Individual channel configuration:

**2. Individual channel configuration:** Each channel can be individually configured as either voltage or current output.

### **3. Card ID:**

ICP DAS has also included an onboard Card ID switch on the PIO-DA4U/DA8U/DA16U series that enables the board to be recognized via software if two or more boards are installed in the same computer.

## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
VO_0	01		DO 0	01	O O
VO_1	02		DO 2	03	O O
VO_2	03		DO 4	05	O O
VO_3	04		DO 6	07	O O
A.GND	05		DO 8	09	O O
VO_4	06		DO 10	11	O O
VO_5	07		DO 12	13	O O
VO_6	08		DO 14	15	O O
VO_7	09		GND	17	O O
A.GND	10		+5 V	19	O O
VO_8	11				
VO_9	12				
VO_10	13				
VO_11	14				
A.GND	15				
VO_12	16				
VO_13	17				
VO_14	18				
VO_15	19				

A green circular icon representing software or a disc.

**Software**

## Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
  - Linux

## Sample Programs

- DOS Lib and TC/BC/MSC Demo
  - LabVIEW Toolkit
  - VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

Model	PIO-DA4U	PIO-DA8U	PIO-DA16U		
<b>Analog Output</b>					
Channels	4	8	16		
Resolution	14-bit				
Accuracy	0.04% of FSR $\pm 2$ LSB @ 25°C, $\pm 10$ V				
Output Driving	$\pm 5$ mA				
Output Range	Voltage	$\pm 10$ V			
	Current	0 ~ +20 mA			
Output Impedance	0.1 $\Omega$ Max.				
<b>Digital I/O</b>					
Channels	DI	16, 5 V/TTL			
	DO	16, 5 V/TTL			
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.				
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.				
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V				
<b>Timer/Counter</b>					
Channels	3				
Resolution	16-bit				
Input Frequency	10 MHz Max.				
Reference Clock	Internal: 4 MHz				
<b>General</b>					
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz				
Card ID	Yes (4-bit)				
Connectors	Female DB37 x 1, 20-pin Box Header x 2				
Power Consumption	600 mA @ +5 V	800mA @ +5 V	1400 mA @ +5 V		
Operating Temperature	0°C to +60°C				
Humidity	5 to 85% RH. Non-condensing				



## Ordering Information

<b>PIO-DA4U CR</b>	Universal PCI, 4-channel DA Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PIO-DA8U CR</b>	Universal PCI, 8-channel DA Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PIO-DA16U CR</b>	Universal PCI, 16-channel DA Board (RoHS). Includes one CA-4002 D-sub Connector.

## 3-4 Isolated Digital I/O Boards



### Selection Guide

Model	PISO-1730U	PISO-P32C32U		PISO-P32A32U		PISO-P32S32WU	PISO-P64U		PISO-C64U	PISO-A64U	PISO-730		PISO-730A	
	-	-5V	-	-5V	-	-	-24V	-	-	-	U	-5V	U	-5V
Interface	Universal PCI					Universal PCI					PCI			
<b>Isolated Digital Input</b>														
Channels	32	32	32	32	32	64	-	-	16	16				
Isolation Voltage	3750 V <sub>rms</sub>					-	-	-	3750 V <sub>rms</sub>					
Input Voltage	Logic 0	0 ~ +1 V					-	-	0 ~ +1 V					
	Logic 1	+9 ~ +24 V	+5 ~ +12 V	+9 ~ +24 V	+5 ~ +12 V	+9 ~ +24 V	+5 ~ +15 V	+20 ~ +28 V	-	-	+9 ~ +24 V	+5 ~ +12 V	+9 ~ +24 V	+5 ~ +12 V
Input Impedance	3 kΩ, 0.5 W					1.2 kΩ, 1 W	3 kΩ, 1 W	-	-	1.2 kΩ, 1 W				
Built-in DC/DC Converter	3000 V <sub>dc</sub>				-	3000 V <sub>dc</sub>	-	-	3000 V <sub>dc</sub>	3000 V <sub>dc</sub>	-			
<b>Isolated Digital Output</b>														
Channels	32	32	32	32	-	64	64	16	16	16				
Type	Sink (NPN)	Source (PNP)	Sink (NPN)	-	Sink (NPN)	Source (PNP)	Sink (NPN)	Source (PNP)						
Isolated Voltage	3750 V <sub>rms</sub>					-	3750 V <sub>rms</sub>							
Output Range	100 mA/+30 V for each channel @ 100% duty				500 mA (Max.)	-	100 mA/+30 V for each channel @ 60% duty		100 mA/+30 V for each channel @ 100% duty					
<b>Non-isolated Digital I/O</b>														
DI Channels	-	-	-	-	-	-	-	-	16	16				
DO Channels	-	-	-	-	-	-	-	-	16	16				
Compatibility	-	-	-	-	-	-	-	-	5 V/TTL	5 V/TTL				

Model	PCI-P8R8U	PCI-P16R16U	PCI-P16C16	PCI-P16POR16U	PISO-P8R8U	PISO-P16R16U	PISO-725U	
	Universal PCI	PCI	Universal PCI	Universal PCI	Universal PCI	Universal PCI	PCI	
<b>Isolated Digital Input</b>								
Channels	8 (Optical)	16 (Optical)	16 (Optical)	16 (Optical)	8 (Optical)	16 (Optical)	8 (Optical)	
Isolation Voltage	5000 V <sub>rms</sub>					3750 V <sub>rms</sub>		
Input Voltage	Logic 0	AC/DC 0 ~ +1 V						
	Logic 1	AC/DC +5 ~ +24 V (AC 50 ~ 1 kHz)						
<b>Isolated Digital Output</b>								
Channels	4 x Form C 4 x Form A	8 x Form C 8 x Form A	16 (Sink, NPN)	16 x Form A	8 x Form A	8 x Form C 8 x Form A	8 x Form C	
Type	Relay	Relay	Open-collector	PhotoMos Relay	Relay	Relay	Relay	
Isolated Voltage	-	-	5000 V <sub>rms</sub>	-	-	-	-	
Contact Rating	DC	24 V @ 1 A		600 mA/ 30 V	Load Voltage: 300 V (AC Peak or DC)	30 V @ 5 A	24 V @ 1 A	
	AC	120 V @ 0.5 A		-	250 V @ 1.6 A	120 V @ 0.5 A	0.3 A/120 V	

## PISO-1730U

Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel  
Optically-isolated Open-collector Digital Output Board (Sink, NPN)



### Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 32 Optically-isolated Digital Input Channels
- 32 Optically-isolated Digital Output Channels (Sink, NPN)
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Four Isolated Banks
- Supports Card ID (SMD Switch)

3

4

### Introduction

The PISO-1730U card offers 32 optically-isolated Digital Input channels and 32 optically-isolated Digital Output channels, arranged into four isolated banks. Each input channel uses a photocoupler, while each output channel contains a Darlington transistor. Both the output port and the input port should use an external power supply. The board eliminates ground-loop problems and isolates the host computer from potentially damaging voltage spikes.

The PISO-1730U card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.



### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
IDO_0	01		IDO_1	01	O O
IDO_2	02		IDO_3	03	O O
IDO_4	03		IDO_5	05	O O
IDO_6	04		IDO_7	07	O O
PCOM	05		PCOM	09	O O
IDO_9	06		IDO_8	11	O O
IDO_11	07		IDO_10	13	O O
IDO_13	08		IDO_12	15	O O
IDO_15	09		IDO_14	17	O O
IDO_16	10		PCOM	19	O O
IDO_18	11		IDO_17	21	O O
IDO_20	12		IDO_19	23	O O
IDO_22	13		IDO_21	25	O O
PCOM	14		IDO_23	27	O O
IDO_25	15		IDO_24	29	O O
IDO_27	16		IDO_26	31	O O
IDO_29	17		IDO_28	33	O O
IDO_31	18		PCOM	35	O O
EGND	19		PCOM	37	O O
			N/A	39	O O
					CON2 (40-pin Box Header)
					CON1 (Female DB-37)



### Hardware Specifications

#### Digital Input

Channels	32
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)
Compatibility	Photocoupler (Bi-directional)
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: 9 ~ +24 V
Input Impedance	3 kΩ, 0.5 W
Response Speed	4 kHz (Typical)

#### Digital Output

Channels	32
Isolation Voltage	3750 V <sub>rms</sub>
Compatibility	Sink, Open Collector
Output Capability	100 mA/+30 V for one channel @ 100% duty
Response Speed	4 kHz (Typical)

#### General

Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1 40-pin Box Header x 1
Power Consumption	600 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



### Ordering Information

PISO-1730U CR	Universal PCI Board with 32 Optically-isolated Digital Input Channels and 32 Optically-isolated Open-collector Digital Output Channels (Sink, NPN) (RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
---------------	--

## PISO-P32C32U/PISO-P32C32U-5V

## Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output Board (Sink)



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
  - 32 Optically-isolated Digital Input Channels
  - 32 Optically-isolated Digital Output Channels (Sink, NPN)
    - Supports DO Status Readback (Register Level)
  - 3750 V<sub>rms</sub> Photo-isolation Protection
  - Four Isolated Banks
  - Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
  - Supports Card ID (SMD Switch)

 **Introduction**

The PISO-P32C32U/P32C32U-5V card features 32 optically-isolated Digital Input channels and 32 optically-isolated Digital Output channels, arranged into four isolated banks. Each input channel uses a photocoupler, while each output channel contains a Darlington transistor. Either an external power supply or an isolated internal power supply from the PC via a DC/DC converter can be used for the input port, which is selected via a jumper, whereas the output port should use an external power supply. The board eliminates ground-loop problems and isolates the host computer from potentially damaging voltage spikes.

The PISO-P32C32U/P32C32U-5V cards also include an onboard Card ID switch (version 1.1 or above) that enables the board to be recognized via software if two or more boards are installed in the same computer.

The PISO-P32C32U-5V uses lower input impedance that is suitable for 5 V signal applications, while the PISO-P32C32U uses higher input impedance that is suitable for 12 or 24 V signal applications and produces less heat.

A green circular icon containing a stylized white CD or software disc.

## Drivers

 32/64-bit Windows XP/2003/2008/7/8/10

A green checkmark icon inside a square box.

Linux

 DASYLab

## Sample Programs

 DOS Lib and TC/BC/MSC Demo

 LabVIEW Toolkit

 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Pin Assignments

## Hardware Specifications

<b>Model</b>	<b>PISO-P32C32U</b>	<b>PISO-P32C32U-5V</b>
<b>Digital Input</b>		
Channels	32	
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)	
Compatibility	Photocoupler (Bi-directional)	
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: +9 ~ +24 V	Logic 0: 0 ~ +1 V Logic 1: +5 ~ +12 V
DI Power	External	Internal/External
Input Impedance	3 kΩ, 0.5 W	
Response Speed	4 kHz (Typical)	
<b>Digital Output</b>		
Channels	32	
Isolation Voltage	3750 V <sub>rms</sub>	
Compatibility	Sink, Open-collector	
Output Capability	100 mA/+30 V for each channel @ 100% duty	
Response Speed	4 kHz (Typical)	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 40-pin Box Header x 1	
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## **Ordering Information**

<b>PISO-P32C32U CR</b>	Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Digital Open-collector Digital Output Board. (Sink, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
<b>PISO-P32C32U-5V CR</b>	Universal PCI, 32-channel Optically-isolated Digital Input (Logic High: +5 ~ +12 V) and 32-channel Optically-isolated Digital Open-collector Digital Output Board. (Sink, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.

## PISO-P32A32U/PISO-P32A32U-5V

Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output Board (Source)



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 32 Optically-isolated Digital Input Channels
- 32 Optically-isolated Digital Output Channels (Source, PNP)
  - Supports DO Status Readback (Register Level)

- 3750 V<sub>rms</sub> Photo-isolation Protection
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- Supports Card ID (SMD Switch)

### Introduction

The PISO-P32A32U/P32A32-5V card features 32 optically-isolated Digital Input channels and 32 optically-isolated Digital Output channels, arranged into four isolated banks.

Each Digital Output channel includes a PNP transistor and an integral suppression diode for the inductive load. Isolated input channels 0 - 15 are allocated to Group A, while channels 16 - 31 are allocated to Group B. Isolated output channels are allocated to Groups C and D. The photocoupler input for the PISO-P32A32-5V can be powered by using either an internal current source or an external power supply, while the input for the PISO-P32A32U operates using an external power supply only.

The PISO-P32A32U/P32A32-5V cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

The PISO-P32A32-5V uses lower input impedance that is suitable for 5 V signal applications, while the PISO-P32A32U uses higher input impedance that is suitable for 12 or 24 V signal applications and produces less heat.

3

4



### Hardware Specifications

Model	PISO-P32A32U	PISO-P32A32U-5V
<b>Digital Input</b>		
Channels	32	
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)	
Compatibility	Photocoupler (Bi-directional)	
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: +9 ~ +24 V	Logic 0: 0 ~ +1 V Logic 1: +5 ~ +12 V
DI Power	External	Internal/External
Input Impedance	3 KΩ, 0.5 W	
Response Speed	4 kHz (Typical)	
<b>Digital Output</b>		
Channels	32	
Isolation Voltage	3750 V <sub>rms</sub>	
Compatibility	Source, Open-collector	
Output Capability	100 mA/+30 V for each channel @ 100% duty	
Response Speed	4 kHz (Typical)	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 40-pin Box Header x 1	
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
Ext. GND0	01	20	Ext. GND0	01	02 Ext. GND1
DI_0	02	21	DO_0	03	04 DO_16
DI_1	03	22	DO_1	05	06 DO_17
DI_2	04	23	DO_2	07	08 DO_18
DI_3	05	24	DO_3	09	10 DO_19
DI_4	06	25	DO_4	11	12 DO_20
DI_5	07	26	DO_5	13	14 DO_21
DI_6	08	27	DO_6	15	16 DO_22
DI_7	09	28	DO_7	17	18 DO_23
DI_8	10	29	DO_8	19	20 DO_24
DI_9	11	30	DO_9	21	22 DO_25
DI_10	12	31	DO_10	23	24 DO_26
DI_11	13	32	DO_11	25	26 DO_27
DI_12	14	33	DO_12	27	28 DO_28
DI_13	15	34	DO_13	29	30 DO_29
DI_14	16	35	DO_14	31	32 DO_30
DI_15	17	36	DO_15	33	34 DO_31
ECOM0	18	37	Ext. PWR0	35	36 Ext. PWR1
IGND0	19			37	38 N/A
				39	40 N/A
					CON2

### Ordering Information

PISO-P32A32U CR	Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output Board. (Source, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
PISO-P32A32U-5V CR	Universal PCI, 32-channel Optically-isolated Digital Input (Logic High: +5 ~ +12 V) and 32-channel Optically-isolated Open-collector Digital Output Board. (Source, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.

## PISO-P32S32WU

Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output Board (Sink)



### Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Input Range up to 30 V<sub>DC</sub>

- 32 Optically-isolated Digital Input Channels
- 32 Optically-isolated Digital Output Channels (Sink, NPN)
  - 100 mA (24 Channels) Low Driving
  - 500 mA (8 Channels) High Driving

### Introduction

PISO-P32S32WU card supports both 3.3 V and 5 V PCI slots and provides 32 optically-isolated Digital Input channels and 32 optically-isolated open-collector Digital Output channels (8 channels for 500 mA and 24 channels for 100 mA current sinking output, NPN), arranged into four isolated banks. Each Digital Input channel uses a photocoupler to isolate the card and the computer from external signals, while each Digital Output channel includes an NPN transistor and an integral suppression diode for the inductive load. The PISO-P32S32WU requires an external power supply to drive the DI and DO ports, and supports Card ID (jumper) features for multi-board identification if two or more boards are installed in the same computer.

The board interfaces to field logic signals, eliminating ground-loop problems and isolating the host computer from potentially damaging voltage spikes.

PISO-P32S32WU contains a single 37-pin D-sub connector and a single 40-pin male header. A 40-pin to DB-37 flat cable is used to fix with the case. The digital signal can be connected through the second D-sub connector, and each D-sub connector supports 16 input and 16 output channels.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
Ext. GND0	01		Ext. GND1	01	O O
DI_0	02	20	Ext. GND0	02	Ext. GND1
DI_1	03	21	DO0 for high drive	03	O O
DI_2	04	22	DO1 for high drive	04	DO16 for high drive
DI_3	05	23	DO2 for high drive	05	O O
DI_4	06	24	DO3 for high drive	06	DO17 for high drive
DI_5	07	25	DO_4	07	O O
DI_6	08	26	DO_5	08	DO18 for high drive
DI_7	09	27	DO_6	09	O O
DI_8	10	28	DO_7	10	DO19 for high drive
DI_9	11	29	DO_8	11	O O
DI_10	12	30	DO_9	12	DO20
DI_11	13	31	DO_10	13	O O
DI_12	14	32	DO_11	14	DO_21
DI_13	15	33	DO_12	15	O O
DI_14	16	34	DO_13	16	DO_22
DI_15	17	35	DO_14	17	O O
GND for High drive	18	36	DO_15	18	DO_23
GND for High drive	19	37	Ext. PWRO	19	O O
					CON2

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10     Linux

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo     LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Hardware Specifications

Digital Input	
Channels	32
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)
Compatibility	Photocoupler (Bi-directional)
Input Voltage	Logic 0: 0 ~ +1 V; Logic 1: +9 ~ +24 V
Input Impedance	3 KΩ, 0.5 W
Response Speed	4 kHz (Typical)
Digital Output	
Channels	32
Isolation Voltage	3750 V <sub>rms</sub>
Compatibility	Sink, Open-collector
Output Capability	500 mA for one high-driving channel @ 100% duty
	500 mA for all high-driving channels @ 100% duty
Response Speed	100 mA for one low-driving channel @ 100% duty
	100 mA for all low-driving channels @ 100% duty
Response Speed	4 kHz (Typical)
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1; 40-pin Box Header x 1
Power Consumption	600 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Ordering Information

PISO-P32S32WU CR	Universal PCI, 32-channel Optically-isolated Digital Input and 32-channel Optically-isolated Open-collector Digital Output Board (8 channels for 500 mA and 24 channels for 100 mA Current Sinking Output, NPN, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.
------------------	--

3

4

# PISO-P64U/PISO-P64U-24V

Universal PCI, 64-channel Optically-isolated Digital Input Board



## Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation

- 64-channel Optically-isolated Digital Input
  - Jumper-selectable Internal or External Power Source for DI
  - 4 Isolated Banks when using 4 Isolated External Power Supplies

## Introduction

3

4

The PISO-P64U/P64U-24V Universal PCI card supports the 3.3 V/5 V PCI bus and provides 64 optically-isolated Digital Input channels. Either an internal or an external power supply can be used, which can be selected via a jumper. The internal power is provided by an onboard isolated DC/DC converter that provides 3000 V<sub>DC</sub> isolation and is used for connecting dry-contact input devices. The Digital Input channels are arranged into four isolated banks when using four isolated external power supplies. DI channels 0 - 15 are allocated to Bank A, DI channels 16 - 31 are allocated to Bank B, DI channels 32 - 47 are allocated to Bank C, and DI channels 48 - 63 are allocated to Bank D.

The onboard photocouplers provide 3750 V<sub>rms</sub> isolation, and act as an interface to field logic signals, eliminate ground-loop problems, and isolate the host computer from potentially damaging voltage spikes. The PISO-P64U/P64U-24V card contains a single DB-37 connector and a single 40-pin male header, each supporting 32 input channels.

The PISO-P64U/P64U-24V card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
IGND0	01	
DI_0	02	20 IGDND1
DI_1	03	21 DI_16
DI_2	04	22 DI_17
DI_3	05	23 DI_18
DI_4	06	24 DI_19
DI_5	07	25 DI_20
DI_6	08	26 DI_21
DI_7	09	27 DI_22
DI_8	10	28 DI_23
DI_9	11	29 DI_24
DI_10	12	30 DI_25
DI_11	13	31 DI_26
DI_12	14	32 DI_27
DI_13	15	33 DI_28
DI_14	16	34 DI_29
DI_15	17	35 DI_30
ECHO	18	36 DI_31
N.C.	19	37 ECOM1
		CON1
		CON2

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux
- DASYLab

### Sample Programs

- DOS Lib and TC/BC/MSC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

Model	PISO-P64U	PISO-P64U-24V
<b>Digital Input</b>		
Channels	64	
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)	
Compatibility	Photocoupler (Bi-directional)	
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: +5 ~ +15 V (Max. +24 V)	Logic 0: 0 ~ +1 V Logic 1: +20 ~ +28 V (Max. +30 V)
Input Impedance	1.2 kΩ, 1 W	3 kΩ, 1 W
Response Speed	4 kHz (Typical)	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1; 40-pin Box Header x 1	
Power Consumption	400 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## Ordering Information

<b>PISO-P64U CR</b>	Universal PCI, 64-channel Optically-isolated Digital Input Board (RoHS). Includes one CA-4037B cable and two CA-4002 D-sub Connectors.
<b>PISO-P64U-24V CR</b>	Universal PCI, 64-channel Optically-isolated Digital Input (Logic High: +20 ~ +28 V) Board (RoHS). Includes one CA-4037B cable and two CA-4002 D-sub Connectors

## PISO-C64U/PISO-A64U

Universal PCI, 64-channel Optically-isolated Digital Output Board (Sink/Source)



PISO-C64U

PISO-A64U



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 64-channel Optically-isolated Open-collector Digital Output
  - PISO-C64U: Current Sinking, NPN type
  - PISO-A64U: Current Sourcing, PNP type
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- 4 Isolated Banks when using 4 Isolated External Power Supplies
- 3750 V<sub>rms</sub> Photo-isolation Protection

### Introduction

The PISO-C64U/PISO-A64U Universal PCI card supports the 3.3 V/5 V PCI bus. These cards provide 64 optically-isolated Digital Output channels, each of which includes a PNP transistor (PISO-A64U) or a Darlington transistor (PISO-C64U) and an integrated suppression diode for the inductive load.

The Digital Output channels are allocated to four isolated banks when using four isolated external power supplies, and act as an interface to field logic signals, eliminating ground-loop problems, and isolating the host computer from potentially damaging voltage spikes. The open-collector Digital Output channels are typically used for alarm and warning notifications, signal output control, control for external circuits that require a higher voltage level, or signal transmission applications, etc.

The PISO-C64U/PISO-A64U card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer. Both cards have a DB-37 connector and a 40-pin male header, each supporting 32 output channels.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
Ext. GND0	01		Ext. GND3	02	Ext. GND3
DO_0	02	Ext. GND1	03	04	DO_48
DO_1	03	DO_16	05	06	DO_49
DO_2	04	DO_17	07	08	DO_50
DO_3	05	DO_18	09	10	DO_51
DO_4	06	DO_19	11	12	DO_52
DO_5	07	DO_20	13	14	DO_53
DO_6	08	DO_21	15	16	DO_54
DO_7	09	DO_22	17	18	DO_55
DO_8	10	DO_23	19	20	DO_56
DO_9	11	DO_24	21	22	DO_57
DO_10	12	DO_25	23	24	DO_58
DO_11	13	DO_26	25	26	DO_59
DO_12	14	DO_27	27	28	DO_60
DO_13	15	DO_28	29	30	DO_61
DO_14	16	DO_29	31	32	DO_62
DO_15	17	DO_30	33	34	DO_63
Ext. PWR0	18	DO_31	35	36	Ext. PWR3
N.C.	19		37	38	N.C.
				39	N.C.
					CON2
					CON1

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux
- DASYLab

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications

Model	PISO-C64U	PISO-A64U
<b>Digital Output</b>		
Channels	64	
Isolation Voltage	3750 V <sub>rms</sub> (Using external power)	
Compatibility	Sink, Open-collector	Source, Open-collector
Output Capability	100 mA/+30 V for each channel @ 100% duty	100 mA/+30 V for each channel @ 60% duty
Response Speed	4 kHz (Typical)	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 40-pin Box Header x 1	
Power Consumption	800 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

### Ordering Information

PISO-C64U CR	Universal PCI, 64-channel Optically-isolated Open-collector Digital Output Board (Sink, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors
PISO-A64U CR	PUniversal PCI, 64-channel Optically-isolated Open-collector Digital Output Board (Source, RoHS). Includes one CA-4037B Cable and two CA-4002 D-sub Connectors.

## **PISO-730U/PISO-730U-5V**

## Universal PCI, 32-channel Isolated Digital I/O and 32-channel TTL Digital I/O Board (Sink, NPN)



- Universal PCI (3.3 V/5 V) Interface
  - 16-channel Optically-isolated Digital Input
  - 16-channel Optically-isolated Digital Output (Sink, NPN)
  - 16-channel 5 V/TTL Digital Output
  - 16-channel 5 V/TTL Digital Input
  - Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
  - 3750 V<sub>rms</sub> Photo-isolation Protection
  - Supports Card ID (SMD Switch)
  - Supports DO Status Readback (Register Level)
  - 2 Interrupt Sources

3

4

PCI Bus Data Acquisition Boards



## Introduction

The PISO-730U/730U-5V cards provide 32 isolated Digital I/O channels (16 x DI and 16 x DO) and 32 TTL-level Digital I/O channels (16 x DI and 16 x DO). Both the isolated Digital Input and the Digital Output channels use a short optical transmission path to transfer an electronic signal between the elements of a circuit and keep them electrically isolated. With 3750 V<sub>ms</sub> isolation protection, the DI/O channels allow the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes.

Each Digital Output includes a Darlington (NPN) transistor and an integrated suppression diode for the inductive load. The open-collector Digital Output channels are typically used for alarm and warning notifications, signal output control, control for external circuits that require a higher voltage level, or signal transmission applications, etc.

The PISO-730U/730U-5V cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.



# Pin Assignments



## Software

## Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
  - Linux

## Sample Programs

- DOS Lib and TC/BC/MSC Demo
  - LabVIEW Toolkit
  - VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Hardware Specifications

Model	PISO-730U	PISO-730U-5V
<b>Isolated Digital Input</b>		
Channels	16	
Compatibility	Optical	
Isolation Voltage	3750 V <sub>rms</sub>	
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: +9 ~ +24 V	Logic 0: 0 ~ +1 V Logic 1: +5 ~ +12 V
Input Impedance	1.2 kΩ, 1 W	
Response Speed	4 kHz (Typical)	
<b>Isolated Digital Output</b>		
Channels	16	
Compatibility	Sink (NPN), Open-collector	
Isolation Voltage	3750 V <sub>rms</sub>	
Output Capability	100 mA/+30 V for each channel @ 100% duty	
Response Speed	4 kHz (Typical)	
<b>Non-isolated Digital Input</b>		
Channels	16	
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.	
Response Speed	1.2 MHz (Typical)	
<b>Non-isolated Digital Output</b>		
Channels	16	
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V	
Response Speed	1.2 MHz (Typical)	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



## **Ordering Information**

<b>PISO-730U CR</b>	Universal PCI, 32-channel Isolated Digital I/O and 32-channel TTL Digital I/O Board (Sink, RoHS). Includes one CA-4002 D-sub Connector.
<b>PISO-730U-5V CR</b>	Universal PCI, PCI, 32-channel Isolated Digital I/O (Input Logic High: +5 ~ +12 V) and 32-channel TTL Digital I/O Board (Sink, RoHS). Includes one CA-4002 D-sub Connector.

# PISO-730AU

## PISO-730AU-5V

PCI Bus, 32-channel Isolated Digital I/O and 32-channel TTL  
Digital I/O Board (Source, PNP)



### Features >>>

- PCI (5 V) Interface
- 16-channel Optically-isolated Digital Input
- 16-channel Optically-isolated Digital Output (Source, NPN)
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
- 3750 V<sub>rms</sub> Photo-isolation Protection
- 2 Interrupt Sources

### Introduction

The PISO-730AU/730AU-5V cards provide 32 isolated Digital I/O channels (16 x DI and 16 x DO) and 32 TTL-level Digital I/O channels (16 x DI and 16 x DO). Both the isolated Digital Input and the Digital Output channels use a short optical transmission path to transfer an electronic signal between the elements of a circuit and keep them electrically isolated. With 3750 V<sub>rms</sub> isolation protection, the DI/O channels allow the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes.

Each Digital Output includes a PNP transistor and an integral suppression diode for the inductive load. The open-collector Digital Output channels are typically used for alarm and warning notifications, signal output control, control for external circuits that require a higher voltage level, or signal transmission applications, etc.

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
IDI_0	01	
IDI_2	02	
IDI_4	03	
IDI_6	04	
IDI_8	05	
IDI_10	06	
IDI_12	07	
IDI_14	08	
EI.COM1	09	
EPWR1	10	
IDO_0	11	
IDO_2	12	
IDO_4	13	
IDO_6	14	
IDO_8	15	
IDO_10	16	
IDO_12	17	
IDO_14	18	
EPWR2	19	
		CON1

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	O O 02 DI 1
DI 2	03	O O 04 DI 3
DI 4	05	O O 06 DI 5
DI 6	07	O O 08 DI 7
DI 8	09	O O 10 DI 9
DI 10	11	O O 12 DI 11
DI 12	13	O O 14 DI 13
DI 14	15	O O 16 DI 15
GND	17	O O 18 GND
+5 V	19	O O 20 +12 V
		CON2

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	O O 02 DO 1
DO 2	03	O O 04 DO 3
DO 4	05	O O 06 DO 5
DO 6	07	O O 08 DO 7
DO 8	09	O O 10 DO 9
DO 10	10	O O 12 DO 11
DO 12	12	O O 14 DO 13
DO 14	14	O O 16 DO 15
GND	16	O O 18 GND
+5 V	18	O O 20 +12 V
		CON3

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

### Hardware Specifications


Model	PISO-730AU	PISO-730AU-5V
<b>Isolated Digital Input</b>		
Channels	16	
Compatibility	Optical	
Isolation Voltage	3750 V <sub>rms</sub>	
Input Voltage	Logic 0: 0 ~ +1 V Logic 1: +9 ~ +24 V	Logic 0: 0 ~ +1 V Logic 1: +5 ~ +12 V
Input Impedance	1.2 kΩ, 1 W	
Response Speed	4 kHz (Typical)	
<b>Isolated Digital Output</b>		
Channels	16	
Compatibility	Source (PNP), Open-collector	
Isolation Voltage	3750 V <sub>rms</sub>	
Output Capability	100 mA/+30 V for each channel @ 100% duty	
Response Speed	4 kHz (Typical)	
<b>Non-isolated Digital Input</b>		
Channels	16	
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.	
Response Speed	1.2 MHz (Typical)	
<b>Non-isolated Digital Output</b>		
Channels	16	
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max., Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V, Source: 0.8 mA @ 2.0 V	
Response Speed	1.2 MHz (Typical)	
<b>General</b>		
Bus Type	5 V PCI, 32-bit, 33 MHz	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	640 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

### Ordering Information

<b>PISO-730AU CR</b>	PCI bus, 32-channel Isolated DI/O and 32-channel TTL DI/O Board (Source, RoHS). Includes one CA-4002 D-sub Connector
<b>PISO-730AU-5V CR</b>	PCI bus, 32-channel Isolated DI/O (Input Logic High: +5 ~ +12 V) and 32-channel TTL DI/O Board (Source, RoHS). Includes one CA-4002 D-sub Connector.

## **PCI-P8R8U/PCI-P16R16U**

# Universal PCI, 8/16-channel Isolated Digital Input and 8/16-channel Relay Output Board

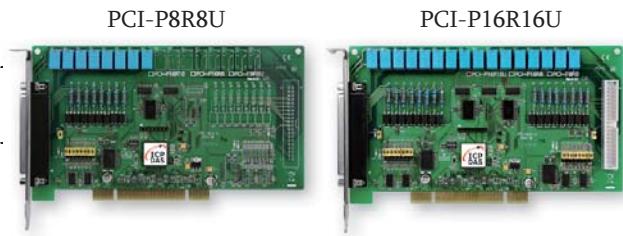

## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
  - 8/16-channel Optically-isolated Digital Input
  - 8/16-channel Relay Output
  - Selectable DC Signal Input Filter
  - AC Signal Input with Filter
  - 5000 V <sub>rms</sub> Photo-isolation Protection

## Introduction

The PCI-P8R8U/P16R16U Universal PCI card supports the 3.3 V/5 V PCI bus and provides 8 or 16 optically-isolated Digital Input channels and 8 or 16 Relay Output channels. The DI channels provide 5000 V <sub>rms</sub> isolation protection that allows the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes. The Relay Output channels can be used where it is necessary to control a circuit using a low-power signal, with complete electrical isolation between the control and the controlled circuits, or where several circuits need to be controlled by a single signal.

3

4

PCI Bus Data Acquisition Boards

The PCI-P8R8U/P16R16U cards also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

PCI-P8R8U/P16R16U cards can be used in a variety of applications, such as controlling the ON/OFF state of external devices, driving external relays or small power switches, activating alarms, contact closure, or sensing external voltages or switches, etc.

A green circular icon representing software or a CD.

## Drivers

-  32/64-bit Windows XP/2003/2008/7/8/10

-  Linux  DASYLab

## Sample Programs

-  DOS Lib and TC/BC/MSC Demo

-  VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



## Pin Assignments



## Hardware Specifications

Models	PCI-P8R8U	PCI-P16R16U
<b>Digital Input</b>		
Channels	8	16
Isolation Voltage	5000 V <sub>rms</sub> (Photocoupler)	
Input Voltage	Logic 1: AC/DC +5 ~ +24 V (AC 50 ~ 1 kHz) Logic 0: AC/DC 0 ~ +1 V	
Response Speed	Without Filter: 50 kHz (Typical) With Filter: 0.455 kHz (Typical)	
<b>Digital Output</b>		
Channels	8	16
Relay Type	4 SPDT, 4 SPST	8 SPDT, 8 SPST
Contact Rating	AC: 120 V @ 0.5 A DC: 24 V @ 1 A	
Operating Time	5 ms (Typical)	
Release Time	10 ms (Typical)	
Insulation Resistance	100 MΩ	
Lifetime	Mechanical: 5,000,000 ops. Electrical: 100,000 ops.	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
I/O Connector	Female DB37 x 1	Female DB37 x 1 40-pin Box Header x 1
Power Consumption	500 mA @ +5 V	800 mA @ +5 V
Operating Temperature	0 to +60 °C	
Humidity	5 to 85% RH, Non-condensing	

 **Ordering Information**

<b>PCI-P8R8U CR</b>	Universal PCI, 8-channel Isolated Digital Input and 8-channel Relay Output Board (RoHS). Includes one CA-4002 D-sub Connector.
<b>PCI-P16R16U CR</b>	Universal PCI, 16-ch Isolated Digital Input and 16-channel Relay Output Board (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.

## PCI-P16C16U

Universal PCI, 16-channel Isolated Digital Input and  
16-channel Open-collector Digital Output Board (Sink, NPN)



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 16-channel Optically-isolated Digital Input
- 16-channel Open-collector Digital Output (Sink, NPN)
- External Power Status LED Indicator
- Selectable DC Signal Input Filter
- AC Signal Input with Filter
- Supports Card ID (SMD Switch)
- 5000 V<sub>rms</sub> Photo-isolation Protection

### Introduction

The PCI-P16C16U Universal PCI card supports the 3.3 V/5 V PCI bus and provides 16 optically-isolated Digital Input channels and 16 open-collector (Sink, NPN) Digital Output channels. The DI channels provide 5000 V<sub>rms</sub> isolation protection that allows the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes. The open-collector DO channels are typically used for alarm and warning notifications, control of signal output, control of external circuits that require a higher voltage level, or signal transmission applications, etc. The PCI-P16C16U contains a single DB-37 connector and a single 40-pin box header, and includes a 40-pin to DB-37 flat cable for easy wiring.

The PCI-P16C16U cards also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

### Software

Drivers	
<input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10	<input checked="" type="checkbox"/> Linux
Sample Programs	
<input checked="" type="checkbox"/> DOS Lib and TC/BC/MSC Demo	<input checked="" type="checkbox"/> LabVIEW Toolkit
<input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo	

### Hardware Specifications

Digital Input	
Channels	16
Isolation Voltage	5000 V <sub>rms</sub> (Photocoupler)
Input Voltage	Logic 1: AC/DC +5 ~+ 24 V (AC 50 ~ 1 kHz) Logic 0: AC/DC 0 ~ +1 V
Response Speed	Without Filter: 50 kHz (Typical) With Filter: 0.455 kHz (Typical)
Digital Output	
Channels	16
Isolation Voltage	5000 V <sub>rms</sub>
Compatibility	Transistor (Sink, Open-collector)
Output Capability	DC: 600 mA/+30 V for each channel @ 100% duty
Response Speed	1 kHz (Typical)
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
I/O Connector	Female DB37 x 1 40-pin Box Header x 1
Power Consumption	800 mA @ +5 V
Operating Temperature	0 to +60 °C
Humidity	5 to 85% RH, Non-condensing

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
OUT_0	01	20	Ext. Power 1	01	O O 02 Ext. Power3
OUT_1	02	21	Ext. Power1	03	O O 04 Ext. Power3
OUT_2	03	22	GND_1	05	O O 06 GND3
OUT_3	04	23	GND_1	07	O O 08 GND3
OUT_4	05	24	Ext. Power2	09	O O 10 Ext. Power4
OUT_5	06	25	Ext. Power2	11	O O 12 Ext. Power4
OUT_6	07	26	GND_2	13	O O 14 GND4
OUT_7	08	27	GND_2	15	O O 16 GND4
N/A	09	28	N/A	17	N/A 18 N/A
N/A	10	29	N/A	19	N/A 20 N/A
N/A	11	30	DIB_0	21	N/A 22 DIB_8
DIA_0	12	31	DIB_1	23	O O 24 DIB_9
DIA_1	13	32	DIB_2	25	O O 26 DIB_10
DIA_2	14	33	DIB_3	27	O O 28 DIB_11
DIA_3	15	34	DIB_4	29	O O 30 DIB_12
DIA_4	16	35	DIB_5	31	O O 32 DIB_13
DIA_5	17	36	DIB_6	33	O O 34 DIB_14
DIA_6	18	37	DIB_7	35	O O 36 DIB_15
DIA_7	19			37	O O 38 N/A
				39	O O 40 N/A
					CON2



### Ordering Information

PCI-P16C16U CR	Universal PCI, 16-channel Isolated Digital Input and 16-channel Open-collector Digital Output Board (Sink, NPN) (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.
----------------	---

## PCI-P16POR16U

Universal PCI, 16-channel Isolated Digital Input and  
16-channel PhotoMOS Relay Output Board



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- LED Power Indicator
- 16-channel Optically-isolated Digital Input
  - 5000 V<sub>rms</sub> Photo-isolation Protection
  - Selectable DC Signal Input Filter
  - AC Signal Input with Filter

- High-speed DI/O Operation
- 16-channel PhotoMOS Relay Output
  - Long-life, High-reliability PhotoMOS Relay
  - Low leakage current when PhotoMOS Relay is OFF
  - No Acoustical Noise
  - No Contact Bounce or Sparking

### Introduction

The PCI-P16POR16U Universal PCI card supports the 3.3 V/5 V PCI bus and provides 16 optically-isolated Digital Input channels and 16 PhotoMOS Relay Output channels. Both the isolated DI channels and the PhotoMOS Relay channels use a short optical transmission path to transfer an electronic signal between elements of a circuit and keep them electrically isolated.

The PCI-P16POR16U provides 5000 V<sub>rms</sub> isolation protection for the DI channels, allowing the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes. The PhotoMOS Relays are used where it is necessary to control a circuit using a low-power signal, with complete electrical isolation between the control and the controlled circuits), or where several circuits must be controlled by a single signal.

This card can be used in a variety of applications, such as controlling the ON/OFF state of external devices, driving external relays or small power switches, activating alarms, contact closure, or sensing external voltages or switches, etc.

The PCI-P16POR16U cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more cards are installed in the same computer. The PCI-P16POR16U is designed as a direct replacement for the PCI-P16POR16 without requiring any modification to the software or the driver.



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
NO_0	01	20 CM_0
NO_1	02	21 CM_1
NO_2	03	22 CM_2
NO_3	04	23 CM_3
NO_4	05	24 CM_4
NO_5	06	25 CM_5
NO_6	07	26 CM_6
NO_7	08	27 CM_7
N/A	09	28 N/A
N/A	10	29 N/A/GND
N/A	11	30 DIB_0
DIA_0	12	31 DIB_1
DIA_1	13	32 DIB_2
DIA_2	14	33 DIB_3
DIA_3	15	34 DIB_4
DIA_4	16	35 DIB_5
DIA_5	17	36 DIB_6
DIA_6	18	37 DIB_7
DIA_7	19	

Pin Assignment	Terminal No.	Pin Assignment
NO_8	01	O O 02 CM_8
NO_9	03	O O 04 CM_9
NO_10	05	O O 06 CM_10
NO_11	07	O O 08 CM_11
NO_12	09	O O 10 CM_12
NO_13	11	O O 12 CM_13
NO_14	13	O O 14 CM_14
NO_15	15	O O 16 CM_15
N/A	17	O O 18 N/A
N/A	19	O O 20 N/A/GND
N/A	21	O O 22 DIB_8
DIA_8	23	O O 24 DIB_9
DIA_9	25	O O 26 DIB_10
DIA_10	27	O O 28 DIB_11
DIA_11	29	O O 30 DIB_12
DIA_12	31	O O 32 DIB_13
DIA_13	33	O O 34 DIB_14
DIA_14	35	O O 36 DIB_15
DIA_15	37	O O 38 N/A
N/A	39	O O 40 N/A

CON2

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10     Linux

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo     LabVIEW Toolkit  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Hardware Specifications

Digital Input	
Channels	16
Isolation Voltage	5000 V <sub>rms</sub> (Photocoupler)
Input Voltage	Logic 1:AC/DC +5 ~ +24 V (AC 50 ~ 1 kHz) Logic 0: AC/DC 0 ~ +1 V
Input Impedance	1.2 kΩ, 0.5 W
Response Speed	Without Filter: 50 kHz (Typical) With Filter: 0.455 kHz (Typical)
Digital Output	
Channels	16
Relay Type	PhotoMOS (Form A)
Contact Rating	Load Voltage 300 V (AC Peak or DC) Load Current 130 mA
Operating Time	0.7 ms (Typical)
Release Time	0.05 ms (Typical)
Insulation Resistance	23 MΩ
Electrical Endurance	Long Life and No Spike
General	
Bus Type	5 V PCI, 32-bit, 33 MHz
I/O Connector	Female DB37 x 1 40-pin Box Header x 1
Power Consumption	800 mA @ +5 V
Operating Temperature	0 to +60 °C
Humidity	5 to 85% RH, Non-condensing



### Ordering Information

PCI-P16POR16U CR	Universal PCI, 16-channel Isolated Digital Input and 16-channel PhotoMOS Relay Output Board (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.
------------------	---

## PISO-P8R8U

Universal PCI/PCI, 8-channel Isolated Digital Input



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 8-channel Electromechanical Relay Output
- 8-channel Optically-isolated Digital Input

- AC Signal Input with Filter
- Selectable DC Signal Input Filter
- 5000 Vrms Photo-isolation Protection
- Onboard Relay Output Status LED Indicators

### Introduction

The PISO-P8R8U Universal PCI card supports the 3.3 V/5 V PCI bus, and offers 8 optically-isolated Digital Input channels and 8 electromechanical Relay Output channels. The DI channels provide 5000 Vrms isolation protection that allows the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes. The Relay Output channels are used where it is necessary to control a circuit using a low-power signal, with complete electrical isolation between the control and the controlled circuits, or where several circuits must be controlled by a single signal.


The PISO-P8R8U can be used in a variety of applications, such as controlling the ON/OFF state of external devices, driving external relays or small power switches, activating alarms, contact closure, or sensing external voltages or switches, etc.

The PISO-P8R8U cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more PISO-P8R8U cards are installed in the same computer. The PISO-P8R8U is designed as a direct replacement for the PISO-P8R8 without requiring any modification to the software or the driver.



### Pin Assignments

Pin Assignment	Terminal No.		Pin Assignment
NO_0	01		20 NO_3
COM_0	02		21 COM_3
N/A	03		22 N/A
NO_1	04		23 NO_4
COM_1	05		24 COM_4
N/A	06		25 NO_5
NO_2	07		26 COM_5
COM_2	08		27 NO_6
N/A	09		28 COM_6
NO_7	10		29 N/A
COM_7	11		30 DIB_0
DIA_0	12		31 DIB_1
DIA_1	13		32 DIB_2
DIA_2	14		33 DIB_3
DIA_3	15		34 DIB_4
DIA_4	16		35 DIB_5
DIA_5	17		36 DIB_6
DIA_6	18		37 DIB_7
CON1			



### Ordering Information

<b>PCI-P8R8U CR</b>	Universal PCI, 8-ch Optically Isolated Digital Input and 8 Relay Output Board (RoHS) Includes one CA-4002 D-Sub connector.
---------------------	--

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

#### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/MATLAB Demo

VB.NET/C#.NET/VC.NET Demo

### Hardware Specifications

#### Hardware

Card ID Yes (4-bit)

Connector Female DB37 x 1

#### Digital Input

Channels 8

Type Photocoupler (Sink and Source)

Response Speed Without Filter: 50 kHz (Typical)  
With Filter: 0.455 kHz(Typical)

Trigger Mode Static Update

Wet Contact, ON Voltage Level AC/DC 5 ~ 24 V (AC 50 ~ 1 kHz)

Wet Contact, OFF Voltage Level AC/DC 0 ~ 1 V

Isolation 5000 Vrms

#### Relay Output

Channels 8

Type SPST N.O.(Form A)

Contact Rating AC: 250 V @ 1.6 A  
DC: 30 V @ 5 A

Operate Time 6 ms (Typical)

Release Time 3 ms (Typical)

Electrical Endurance 100,000 ops.

Mechanical Endurance 2,000,000 ops.

#### PC Bus

Type 3.3 V/5 V Universal PCI, 32-bit, 33 MHz

Data Bus 8-bit

#### Power

Consumption 300 mA @ +5 V

#### Mechanical

Dimensions (mm) 105 x 149 x 22 (W x L x D)

#### Environmental

Operating Temperature 0 ~ +60°C

Storage Temperature -20 ~ +70°C

Humidity 5 ~ 85% RH, Non-condensing

## PISO-P16R16U

Universal PCI, 16-channel Isolated Digital Input and  
16-channel Relay Output Board



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 16-channel Relay Output

- 16-channel Optically-isolated Digital Input
  - 3750 V<sub>rms</sub> Photo-isolation Protection
  - Selectable DC Signal Input Filter
  - AC Signal Input with Filter

### Introduction

3

4

### Software

Drivers	
<input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10	<input checked="" type="checkbox"/> Linux
Sample Programs	
<input checked="" type="checkbox"/> DOS Lib and TC/BC/MSC Demo	<input checked="" type="checkbox"/> LabVIEW Toolkit
<input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo	

### Hardware Specifications

Digital Input	
Channels	16
Isolation Voltage	3750 V <sub>rms</sub> (Photocoupler)
Input Voltage	Logic 1: AC/DC +5 ~ +24 V (AC 50 ~ 1 kHz) Logic 0: AC/DC 0 ~ +1 V
Input Impedance	1.2 KΩ, 0.5 W
Response Speed	Without Filter: 50 kHz (Typical) With Filter: 0.455 kHz (Typical)
Digital Output	
Channels	16
Relay Type	8 SPDT, 8 SPST
Contact Rating	AC: 120 V @ 0.5 A DC: 24 V @ 1 A
Operating Time	1 ms (Typical)
Release Time	7 ms (Typical)
Insulation Resistance	1000 MΩ
Lifetime	Mechanical: 5,000,000 ops. Electrical: 100,000 ops.
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
I/O Connector	Female DB37 x 1 40-pin box header x 1
Power Consumption	800 mA @ +5 V
Operating Temperature	0 to +60 °C
Humidity	5 to 85% RH, Non-condensing



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
NO_0	01	20	NO_3	01	O O 02 NO_11
COM_0	02	21	COM_3	03	O O 04 COM_11
NC_0	03	22	NC_3	05	O O 06 NC_11
NO_1	04	23	NO_4	07	O O 08 NO_12
COM_1	05	24	COM_4	09	O O 10 COM_12
NC_1	06	25	NO_5	11	O O 12 NO_13
NO_2	07	26	COM_5	13	O O 14 COM_13
COM_2	08	27	NO_6	15	O O 16 NO_14
NC_2	09	28	COM_6	17	O O 18 COM_14
NO_7	10	29	GND	19	O O 20 GND
COM_7	11	30	DIB_0	21	O O 22 DIB_8
DIA_0	12	31	DIB_1	23	O O 24 DIB_9
DIA_1	13	32	DIB_2	25	O O 26 DIB_10
DIA_2	14	33	DIB_3	27	O O 28 DIB_11
DIA_3	15	34	DIB_4	29	O O 30 DIB_12
DIA_4	16	35	DIB_5	31	O O 32 DIB_13
DIA_5	17	36	DIB_6	33	O O 34 DIB_14
DIA_6	18	37	DIB_7	35	O O 36 DIB_15
DIA_7	19			37	O O 38 N/A
					N/A 39 O O 40 N/A
					CON2
					CON1



### Ordering Information

PISO-P16R16U	Universal PCI, 16-channel Isolated Digital Input and 16-channel Relay Output. Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.
PISO-P16R16U CR	Universal PCI, 16-channel Isolated Digital Input and 16-channel Relay Output (RoHS). Includes one CA-4037W Cable and two CA-4002 D-sub Connectors.

# PISO-725U

Universal PCI, 8-ch Relay Output and 8-ch Isolated Digital Input Board



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 8-channel Electromechanical Relay Output
  - Supports Status Readback
  - Onboard Status LED Indicators
- 8-channel Optically-isolated Digital Input
  - 3750 V<sub>rms</sub> Photo-isolation Protection
  - State-changed Interrupt for all Digital Inputs
  - Jumper-selectable Isolated or Non-isolated Digital Inputs



## Introduction

The PISO-P725U is a Universal PCI card supporting both the 3.3 V and 5 V PCI bus, and provides 8 isolated or non-isolated Digital Input channels and 8 electromechanical Relay Output channels.

The DI channels can be set to either isolated or non-isolated via a hardware jumper, and each channel will generate an interrupt signal if the state is changed, which is very useful when monitoring contact openings/closures as it is not necessary to continuously poll the inputs. The isolated DI channels use a short optical transmission path to transfer an electronic signal between elements of a circuit and keep them electrically isolated. With 3750 V<sub>rms</sub> isolation protection, the DI channels allow the input signals to be completely floated so as to prevent ground loops and isolate the host computer from potentially damaging voltage spikes.

The Relay Output channels are used where it is necessary to control a circuit using a low-power signal, with complete electrical isolation between the control and the controlled circuits, or where several circuits must be controlled by a single signal. All relays are de-energized (switched off) during power-on, and support ON/OFF status read back.

The PISO-725 can be used in a variety of applications, including contact closure, external voltage sensing, load sensing and I/O control, etc.

## Pin Assignments

Pin Assignment	Terminal	No.	Pin Assignment
NO_0	01	20	CM_0
NO_1	02	21	CM_1
NO_2	03	22	CM_2
NO_3	04	23	CM_3
NO_4	05	24	CM_4
NO_5	06	25	CM_5
NO_6	07	26	CM_6
NO_7	08	27	CM_7
N/A	09	28	N/A
N/A	10	29	N/A/GND
N/A	11	30	DIB_0
DIA_0	12	31	DIB_1
DIA_1	13	32	DIB_2
DIA_2	14	33	DIB_3
DIA_3	15	34	DIB_4
DIA_4	16	35	DIB_5
DIA_5	17	36	DIB_6
DIA_6	18	37	DIB_7
CON1			

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux
- DASYLab

### Sample Programs

- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## Hardware Specifications

### Hardware

Connector	Female DB37 x 1
-----------	-----------------

### Digital Input

Channels	8
Type	Photocoupler (Sink)
Response Speed	4 kHz (Typical)
Trigger Mode	Static Update
Wet Contact, ON Voltage Level	9 ~ 24 V
Wet Contact, OFF Voltage Level	0 ~ 1 V
Isolation	3750 V <sub>rms</sub> (Using external power)

### Digital Output

Channels	8
Type	Form C
Contact Rating	AC: 0.3 A/120 V DC: 1 A/30 V
Operate Time	5 ms (Typical)
Release Time	10 ms (Typical)

### PC Bus

Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Data Bus	8-bit

### Power

Consumption	300 mA @ +5 V
-------------	---------------

### Mechanical

Dimensions (mm)	110 x 150 x 22 (W x L x D)
-----------------	----------------------------

### Environmental

Operating Temperature	0 ~ +60°C
Storage Temperature	-20 ~ +70°C
Humidity	5 ~ 85% RH, Non-condensing

## Ordering Information

PISO-725U CR	Universal PCI, 8-ch Relay Output and 8-ch Isolated Digital Input Board (RoHS) Includes one CA-4002 D-Sub connector
--------------	---

## 3-5 Non-isolated Digital I/O Boards



### Selection Guide

3

5

Model	PCI-D64HU	PIO-D24U	PIO-D48U	PIO-D48SU	PIO-D56U	PIO-D64U	PIO-D96U	PIO-D96SU	PIO-D144U	PIO-D144LU	PIO-D168U	PCI-D96SU	PCI-D128SU	
Interface	Universal PCI													
Data Bus	32-bit	8-bit												32-bit
<b>Programmable DI/O</b>														
Channels	-	24	48	24	-	96	144	144	168	96	128			
<b>Digital Input</b>														
Channels	32	-	-	16	32	-	-	-	-	-	-			
Type	5 V/TTL						5 V/ CMOS	5 V/TTL	5 V/ CMOS	5 V/TTL	5 V/TTL	1.8 V, 2.5 V, 3.3 V, 5 V		
Input Voltage	Logic 0 (Max.)	0.8 V										0.65 V, 0.7 V 0.8 V, 1.5V		
	Logic 1 (Min.)	0.2 V										1.2 V, 1.7 V 2.0 V, 3.5V		
<b>Digital Output</b>														
Channels	32	-	-	16	32	-	-	-	-	-	-			
Type	5 V/TTL						5 V/ CMOS	5 V/TTL	5 V/ CMOS	5 V/TTL	5 V/TTL	1.8 V, 2.5 V, 3.3 V, 5 V		
Output Voltage	Logic 0 (Max.)	0.55 V	0.4 V				0.1 V	0.4 V	0.1 V	0.4 V	0.4 V	0.65 V, 0.7 V 0.8 V, 1.5V		
	Logic 1 (Min.)	2.0 V	2.4 V				4.4 V	2.4 V	4.4 V	2.4 V	2.4 V	1.2 V, 1.7 V 2.0 V, 3.5V		
Output Capability	Sink	64 mA @ 0.55 V	64 mA @ 0.8 V		CN1: 2.4 mA @ 0.8 V CN3: 64 mA @ 0.8 V	24 mA @ 0.8 V	64 mA @ 0.8 V	6 mA @ 0.33 V	64 mA @ 0.8 V	6 mA @ 0.33 V	64 mA @ 0.8 V	1 mA, 2 mA, 4mA, 5 mA		
	Source	-32 mA @ 2.0 V	32 mA @ 2.0 V		CN1: 0.8 mA @ 2.0 V CN3: 32 mA @ 2.0 V	15 mA @ 2.0	32 mA @ 2.0 V	6 mA @ 4.77 V	32 mA @ 2.0 V	6 mA @ 4.77 V	32 mA @ 2.0 V	1 mA, 2 mA, 4mA, 5 mA		
<b>Timer/Counter</b>														
Channels	3	-	2	-	6	-	-	-	-	-	-			
Resolution	16-bit	-	16-bit	-	16-bit	-	-	-	-	-	-			
Clock Source	-	-	4 MHz	-	4 MHz	-	-	-	-	-	-			
<b>Connector</b>														
100-pin SCSI II	-	-	-	1	-	-	-	1	-	-	-	1	1	
50-pin Header	-	-	1	-	-	-	3	-	5	-	6	-	-	
40-pin Header	1	-	-	-	-	-	-	-	-	-	-	-	-	
37-pin D-sub	1	1	1	-	1	-	1	-	1	-	1	-	-	
20-pin Header	-	-	-	-	2	5	-	-	-	-	-	-	-	2

## PCI-D64HU

Universal PCI, 40 MB/s High-speed 32-channel DI and  
32-channel DO Board



32  
bit



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 32-channel, 5 V/TTL Digital Output
- Data Transfer Rate up to 40 MB/s for each DMA Channel
- Onboard 1 k/2 k DWORD FIFO for DI/DO, respectively
- DO FIFO Supports Ring Buffer Mode
- No Bus Loading in Repetitive Pattern Generation Applications

- 32-channel, 5 V/TTL Digital Input
- 2-channel Bus Mastering Scatter/Gather
- 8-channel Optically-isolated Digital Input
- Data Transfer Modes:
  - Direct Program Control, Internal Timer Pacer
  - External Clock (DI only), Handshaking

### Introduction

The PCI-D64HU is a high-speed digital I/O card containing 32 Digital Input channels and 32 Digital Output channels. The high-performance design makes this card perfect for high-speed data transfer and pattern generation applications.

The PCI-D64HU performs high-speed data transfer using a bus-mastering DMA via the 32-bit PCI bus, with a maximum data transfer rate of up to 40 MB per second. A variety of digital I/O transfer modes are supported, including direct programmed I/O control, timer pacer control, external clock mode and handshaking mode.

The PCI-D64HU also features a programmable digital filter for all input signals, including handshaking and trigger signals. The PCI-D64HU is a reliable and cost-effective interface that can be used to control any high-speed peripherals connected to your computer system.

3

5



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
DI_0	01	
DI_1	02	DO_0
DI_2	03	DO_1
DI_3	04	DO_2
DI_4	05	DO_3
DI_5	06	DO_4
DI_6	07	DO_5
DI_7	08	DO_6
DI_8	09	DO_7
DI_9	10	DO_8
DI_10	11	DO_9
DI_11	12	DO_10
DI_12	13	DO_11
DI_13	14	DO_12
DI_14	15	DO_13
DI_15	16	DO_14
+5 V	17	DO_15
I_ACK	18	GND
I_REQ	19	I_TRG
		CON1

Pin Assignment	Terminal No.	Pin Assignment
DI_16	01	O O
DI_17	03	O O
DI_18	05	O O
DI_19	07	O O
DI_20	09	O O
DI_21	11	O O
DI_22	13	O O
DI_23	15	O O
DI_24	17	O O
DI_25	19	O O
DI_26	21	O O
DI_27	23	O O
DI_28	25	O O
DI_29	27	O O
DI_30	29	O O
DI_31	31	O O
+5 V	33	O O
O_ACK	35	O O
O_REQ	37	O O
N.C.	39	O O
		CON2

### Software

#### Drivers

- 32-bit Windows 2000/XP/2003/2008/7/8/10

#### Sample Programs

- VB/VC/BCB Demo



### Hardware Specifications

#### Digital Input

Channels	32
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max., Logic 1: 2.0 V Min.
Handshaking Signals	I_REQ Input , I_ACK Output , I_TRG Input

#### Digital Output

Channels	32
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.55 V Max., Logic 1: 2.0 V Min.
Output Capability	Sink: 64 mA @ 0.55 V, Source: 32 mA @ 2.0 V

#### Timer/Counter

Channels	3
Resolution	16-bit
Input Frequency	2.5 ~ 20 MHz
Timer 0	DI Clock Source
Timer 1	DO Clock Source
Timer 2	Base Clock for Timer 0 and Timer 1

#### Interrupts

- Sources: O\_ACK, I\_REQ, Timer 0, Timer 1 and Timer 2

#### Onboard FIFO

Size	1 k DWORD (32-bit) for DI 2 k DWORD (32-bit) for DO
Size in Ring Buffer Mode	2 ~ 2 k DWORD (32-bit), DO only

#### General

Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Connectors	Female DB37 x 1, 40-pin Box Header x 1
Power Consumption	200 mA @ +5 V Typical (no output load)
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing




### Ordering Information

#### PCI-D64HU CR

Universal PCI, 40 MB/s High-speed 32-channel DI and 32-channel DO (RoHS). Includes one CA-4037W cable and two CA-4002 D-sub connectors.

## PIO-D24U/PIO-D56U

Universal PCI, 24/56-channel Digital I/O Board

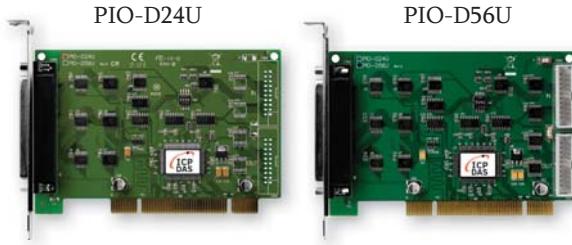

### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 24/56 Buffered TTL Digital I/O Lines
- Three 8-bit Bi-directional Programmable I/O Ports
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- 4-channel Interrupt Source
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- DI/O Response Time approximately 1 µs (1 MHz)

### Introduction

The PIO-D24U/D56U cards are designed to be fully compatible with PIO-D24/D56 boards. The PIO-D24U/D56U series can be used as a direct replacement for PIO-D24/D56 boards without requiring any modification to the software or the driver.

3

5

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux  DASYLab

#### Sample Programs

- DOS Lib and TC/BC/MSC Demo  LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
N.C	01	20 +5 V
N.C.	02	21 GND
PB_7	03	22 PC_7
PB_6	04	23 PC_6
PB_5	05	24 PC_5
PB_4	06	25 PC_4
PB_3	07	26 PC_3
PB_2	08	27 PC_2
PB_1	09	28 PC_1
PB_0	10	29 PC_0
GND	11	30 PA_7
N.C.	12	31 PA_6
GND	13	32 PA_5
N.C.	14	33 PA_4
GND	15	34 PA_3
N.C.	16	35 PA_2
GND	17	36 PA_1
+5 V	18	37 PA_0
GND	19	

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	O O 02 DI 1
DI 2	03	O O 04 DI 3
DI 4	05	O O 06 DI 5
DI 6	07	O O 08 DI 7
DI 8	09	O O 10 DI 9
DI 10	11	O O 12 DI 11
DI 12	13	O O 14 DI 13
DI 14	15	O O 16 DI 15
GND	17	O O 18 GND
+5 V	19	O O 20 +12 V

CON2 (PIO-D56U only)

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	O O 02 DO 1
DO 2	03	O O 04 DO 3
DO 4	05	O O 06 DO 5
DO 6	07	O O 08 DO 7
DO 8	09	O O 10 DO 9
DO 10	10	O O 12 DO 11
DO 12	12	O O 14 DO 13
DO 14	14	O O 16 DO 15
GND	16	O O 18 GND
+5 V	18	O O 20 +12 V

CON1 (PIO-D56U only)



### Hardware Specifications

Model	PIO-D24U	PIO-D56U
<b>Programmable DIO</b>		
Channels	24	
<b>Digital Input</b>		
Channels	-	16
Compatibility	5V/TTL	
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.	
Response Speed	1 MHz	
<b>Digital Output</b>		
Channels	-	16
Compatibility	5V/TTL	
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.	
Output Capability	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V	CN1 Sink: 2.4 mA @ 0.8 V Source: 0.8 mA @ 2.0 V  CN3 Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	1 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1	Female DB37 x 1, 20-pin Male Box Header x 2
Power Consumption	420 mA @ +5 V	580 mA @ +5 V
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



### Ordering Information

<b>PIO-D24U CR</b>	Universal PCI, 24-channel Digital I/O Board (RoHS).
<b>PIO-D56U CR</b>	Universal PCI, 56-channel Digital I/O Board (RoHS).

## PIO-D48U/PIO-D48SU

Universal PCI, 48-channel Digital I/O Board



PIO-D48U



PIO-D48SU



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 48 Buffered TTL Digital I/O Lines
- Six 8-bit Bi-directional Programmable I/O Ports
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- All I/O Lines Buffered on the Board
- 4-channel Interrupt Source
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- Buffer Output for Higher Driving Capability
- DI/O Response Time approximately 1 µs (1 MHz)

### Introduction

The PIO-D48U/D48SU card is designed to be fully compatible with the PIO-D48, meaning that a PIO-D48 card can be directly replaced with a PIO-D48U/D48SU without requiring any modification to the software or the driver.

The PIO-D48U provides two connectors for I/O wiring, while the PIO-D48SU provides a single high-density connector that reduces the amount of installation space required for the card in the computer.

The PIO-D48U/D48SU supports the 3.3 V/5 V PCI bus, and provides 48 TTL Digital I/O lines that are grouped into six 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), and Port C can be split into two nibble-wide (4-bit) parts. All ports are configured as inputs on power-up or after a reset.

The PIO-D48U/D48SU card also includes an onboard Card ID switch and pull-high/low resistors for the Digital Input. The Card ID switch can be set so that the board is able to be recognized via software if two or more boards are installed in the same computer. The pull-high/pull-low resistors allow the DI status to be predefined as either high or low instead of remaining floating if the DI channels are disconnected or interrupted.



### Hardware Specifications

Model	PIO-D48U	PIO-D48SU
<b>Programmable DIO</b>		
Channels	48	
<b>Digital Input</b>		
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.	
Response Speed	1 MHz	
<b>Digital Output</b>		
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 64 mA @ 0.8 V; Source: 32 mA @ 2.0 V	
Response Speed	1 MHz	
<b>Timer/Counter</b>		
Channels	2 (Event timer x1/ 32-bit Timer x1)	
Resolution	16-bit	
Reference Clock	Internal: 4 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 50-pin Box Header x 1	Female SCSI II 100-pin x 1
Power Consumption	900 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



### Ordering Information

PIO-D48U CR	Universal PCI, 48-channel Digital I/O Board (RoHS).
PIO-D48SU CR	Universal PCI, 48-channel Digital I/O Board (SCSI II Connector, RoHS).



### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux
- DASYLab

#### Sample Programs


- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo
- VB.NET/C#.NET/VC.NET Demo



### Pin Assignments

#### • PIO-D48U

Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20 +5 V
N.C.	02	21 GND
PB_7	03	22 PC_7
PB_6	04	23 PC_6
PB_5	05	24 PC_5
PB_4	06	25 PC_4
PB_3	07	26 PC_3
PB_2	08	27 PC_2
PB_1	09	28 PC_1
PB_0	10	29 PC_0
GND	11	30 PA_7
N.C.	12	31 PA_6
GND	13	32 PA_5
N.C.	14	33 PA_4
GND	15	34 PA_3
N.C.	16	35 PA_2
GND	17	36 PA_1
+5 V	18	37 PA_0
GND	19	



#### • PIO-D48SU

Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51 PA_10
PA_01	02	52 PA_11
PA_02	03	53 PA_12
PA_03	04	54 PA_13
PA_04	05	55 PA_14
PA_05	06	56 PA_15
PA_06	07	57 PA_16
PA_07	08	58 PA_17
PA_08	09	59 PB_10
PB_01	10	60 PB_11
PB_02	11	61 PB_12
PB_03	12	62 PB_13
PB_04	13	63 PB_14
PB_05	14	64 PB_15
PB_06	15	65 PB_16
PB_07	16	66 PB_17
PC_00	17	67 PC_10
PC_01	18	68 PC_11
PC_02	19	69 PC_12
PC_03	20	70 PC_13
PC_04	21	71 PC_14
PC_05	22	72 PC_15
PC_06	23	73 PC_16
PC_07	24	74 PC_17
GND	25	75 GND
-	26	76 -
-	27	77 -
-	28	78 -
-	29	79 -
-	30	80 -
-	31	81 -
-	32	82 -
-	33	83 -
-	34	84 -
-	35	85 -
-	36	86 -
-	37	87 -
-	38	88 -
-	39	89 -
-	40	90 -
-	41	91 -
-	42	92 -
-	43	93 -
-	44	94 -
-	45	95 -
-	46	96 -
-	47	97 -
-	48	98 -
-	49	99 -
+ 5 V	50	+ 5 V



## PIO-D64U

Universal PCI, 64-channel Digital I/O Board with Timer/Counter



### Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 32-channel Digital Input
- 32-channel Digital Output
- Interrupt Trigger via Event/Timer Trigger
- 3 Independent Programmable 16-bit Down Counters
- Supports Card ID (SMD Switch)
- Programmable Interrupt Handling
- DI/O Response Time approximately 1 µs (1 MHz)

### Introduction

The PIO-D64U card is designed as a direct replacement for the PIO-D64 without requiring any modification to the software or the driver.

The PIO-D64U Universal PCI card supports the 3.3 V/5 V PCI bus, and provides 32 Digital Input channels and 32 Digital Output channels that consist of two 16-bit input ports and two 16-bit output ports. The PIO-D64U also includes a 6-channel counter/timer that can use four clock sources, 250 kHz, 500 kHz, 1 MHz, and 2 MHz, which can be sourced from the soldering pad. Three of the six channels can be used for general purposes, such as frequency measurement, event counting or pulse generation, while the remaining channels are for interrupt functions.

The PIO-D64U card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

### Software

Drivers		
<input checked="" type="checkbox"/> 32/64-bit Windows XP/2003/2008/7/8/10	<input checked="" type="checkbox"/> Linux	<input checked="" type="checkbox"/> DASYLab
Sample Programs		
<input checked="" type="checkbox"/> DOS Lib and TC Demo	<input checked="" type="checkbox"/> LabVIEW Toolkit	
<input checked="" type="checkbox"/> VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo		

### Hardware Specifications

Digital Input	
Channels	32
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.
Response Speed	1 MHz
Digital Output	
Channels	32
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.
Output Capability	Sink: 24 mA @ 0.8 V; Source: 15 mA @ 2.0 V
Response Speed	1 MHz
Timer/Counter	
Channels	6 (Independent x 3/EVTIRQ x 1/TMRIRQ x 1/EXTIRQ x 1)
Resolution	16-bit
Input Frequency	10 MHz Max.
Reference Clock	Internal: 4 MHz
General	
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	20-pin Box Header x 5
Power Consumption	580 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	0	02	DO 1	0
DO 2	03	0	04	DO 3	0
DO 4	05	0	06	DO 5	0
DO 6	07	0	08	DO 7	0
DO 8	09	0	10	DO 9	0
DO 10	10	0	12	DO 11	0
DO 12	12	0	14	DO 13	0
DO 14	14	0	16	DO 15	0
GND	16	0	18	GND	0
+5 V	18	0	20	+12 V	0
CN1					
CN2					
Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	0	02	DI 1	0
DI 2	03	0	04	DI 3	0
DI 4	05	0	06	DI 5	0
DI 6	07	0	08	DI 7	0
DI 8	09	0	10	DI 9	0
DI 10	11	0	12	DI 11	0
DI 12	13	0	14	DI 13	0
DI 14	15	0	16	DI 15	0
GND	17	0	18	GND	0
+5 V	19	0	20	STROBE1	0
CN3					
CN4					
Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
DO 16	01	0	02	DO 17	0
DO 18	03	0	04	DO 19	0
DO 20	05	0	06	DO 21	0
DO 22	07	0	08	DO 23	0
DO 24	09	0	10	DO 25	0
DO 26	10	0	12	DO 27	0
DO 28	12	0	14	DO 29	0
DO 30	14	0	16	DO 31	0
GND	16	0	18	GND	0
+5 V	18	0	20	+12 V	0
CN5					

### Ordering Information

PIO-D64U CR	Universal PCI, 64-channel Digital I/O Board with Timer/Counter (RoHS).
-------------	--

## PIO-D96U/PIO-D96SU

Universal PCI, 96-channel Digital I/O Board



PIO-D96U



PIO-D96SU



### Features >>>

- Universal PCI (3.3 V/5 V) Interface
- 96-channel Digital I/O
- Twelve 8-bit Bi-directional Programmable I/O Ports
- All I/O Lines Buffered on the Board
- 4-channel Interrupt Source
- Buffer Output for Higher Driving Capability
- Supports Card ID (SMD Switch)
- DI/O Response Time approximately 1 µs (1 MHz)

### Introduction

The PIO-D96U/D96SU card is designed as a direct replacement for the PIO-D96, without requiring any modification to the software or the driver.

The PIO-D96U provides four connectors for I/O wiring, while the PIO-D96SU provides a single high-density connector that reduces the amount of installation space required for the card in the computer.

The PIO-D96U/D96SU Universal PCI card supports the 3.3 V/5 V PCI bus, and provides 96 TTL Digital I/O lines that consist of twelve 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs on power-up or after a reset.

The PIO-D96U/D96SU card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.



### Hardware Specifications

Models	PIO-D96U	PIO-D96SU
<b>Programmable DIO</b>		
Channels	96	
<b>Digital Input</b>		
Compatibility	5 V/TTL	5 V/CMOS
Input Voltage	Logic 0: 0.8 V Max. ; Logic 1: 2.0 V Min.	
Response Speed	1 MHz	
<b>Digital Output</b>		
Compatibility	5 V/TTL	5 V/CMOS
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	Logic 0: 0.1 V Max. ; Logic 1: 4.4 V Min.
Output Capability	Sink: 6 mA @ 0.33 V Source: 6 mA @ 4.77 V	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	1 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 50-pin Box Header x 3	Female SCSI II 100-pin x 1
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	



### Ordering Information

PIO-D96U CR	Universal PCI, 96-channel Digital I/O Board (RoHS).
PIO-D96SU CR	Universal PCI, 96-channel Digital I/O Board (SCSI II Connector, RoHS)

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux
- DASYLab

#### Sample Programs

- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo
- VB.NET/C#.NET/VC.NET Demo

### Pin Assignments

• PIO-D96U	• PIO-D96SU
Pin Assignment	Terminal No.
N.C.	01
N.C.	02
PB_7	03
PB_6	04
PB_5	05
PB_4	06
PB_3	07
PB_2	08
PB_1	09
PB_0	10
GND	11
N.C.	12
GND	13
N.C.	14
GND	15
N.C.	16
GND	17
+5 V	18
GND	19
CN1	
Pin Assignment	Terminal No.
PC_7	01
PC_6	03
PC_5	05
PC_4	07
PC_3	09
PC_2	11
PC_1	13
PC_0	15
PB_7	17
PB_6	19
PB_5	21
PB_4	23
PB_3	25
PB_2	27
PB_1	29
PB_0	31
PA_7	33
PA_6	35
PA_5	37
PA_4	39
PA_3	41
PA_2	43
PA_1	45
PA_0	47
+5 V	49
CN2/CN3/CN4	
Pin Assignment	Terminal No.
PA_00	01
PA_01	02
PA_02	03
PA_03	04
PA_04	05
PA_05	06
PA_06	07
PA_07	08
PB_00	09
PB_01	10
PB_02	11
PB_03	12
PB_04	13
PB_05	14
PB_06	15
PB_07	16
PC_00	17
PC_01	18
PC_02	19
PC_03	20
PC_04	21
PC_05	22
PC_06	23
PC_07	24
GND	25
PA_20	26
PA_21	27
PA_22	28
PA_23	29
PA_24	30
PA_25	31
PA_26	32
PA_27	33
PB_20	34
PB_21	35
PB_22	36
PB_23	37
PB_24	38
PB_25	39
PB_26	40
PB_27	41
PC_20	42
PC_21	43
PC_22	44
PC_23	45
PC_24	46
PC_25	47
PC_26	48
PC_27	49
+ 5 V	50
CN1	

# PIO-D144U/PIO-D144LU PIO-D168U

Universal PCI, 144/168-channel Digital I/O Board



PIO-D144U/PIO-D144LU

PIO-D168U



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 144/168 Digital I/O Channels
- 18/21 8-bit Bi-directional Programmable I/O Ports
- Emulates 6/7 Industrial-standard 8255 PPI Ports (Mode 0)
- All I/O Lines Buffered on the Board

- 4-channel Interrupt Source
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- DI/O Response Time approximately 1 µs (1 MHz)

## 3 Introduction

The PIO-D144U/D144LU/D168U cards are designed as direct replacements for PIO-D144/D168 cards without requiring any modification to the software or the driver.

The PIO-D144U/D144LU/D168U Universal PCI cards support the 3.3 V/5 V PCI bus, and provide 144/168 TTL Digital I/O lines that are grouped into 18/21 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs Channels on power-up or after a reset.

The PIO-D144U uses 5V/TTL to provide high DO driving capability. The PIO-D144LU uses 5V/CMOS to provide low power consumption and producing less heat.

The PIO-D144U/D144LU/D168U cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.



## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
N.C.	01			01	O O
N.C.	02			20	+5 V
PB_7	03			21	GND
PB_6	04			22	PC_7
PB_5	05			23	PC_6
PB_4	06			24	PC_5
PB_3	07			25	PC_4
PB_2	08			26	PC_3
PB_1	09			27	PC_2
PB_0	10			28	PC_1
GND	11			29	PC_0
N.C.	12			30	PA_7
GND	13			31	PA_6
N.C.	14			32	PA_5
GND	15			33	PA_4
N.C.	16			34	PA_3
GND	17			35	PA_2
+5 V	18			36	PA_1
GND	19			37	PA_0
					CN2/CN3/CN4/CN5/CN6
					CN7 (for PIO-D168U only)
					CN1

## 4 Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

DASYLab

### Sample Programs

DOS Lib and TC/BC/MSC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

## 5 Hardware Specifications

Models	PIO-D144LU	PIO-D144U	PIO-D168U
<b>Programmable DIO</b>			
Channels	144		168
<b>Digital Input</b>			
Compatibility	5 V/CMOS	5 V/TTL	
Input Voltage	Logic 0 0.8 V Max. Logic 1 2.0 V Min.		
Response Speed	1 MHz		
<b>Digital Output</b>			
Compatibility	5 V/CMOS	5 V/TTL	
Output Voltage	Logic 0 0.1 V Max. Logic 1 4.4 V Min.	0.4 V Max. 2.4 V Min.	
Output Capability	Sink 6 mA @ 0.33 V	64 mA @ 0.8 V	Source 6 mA @ 4.77 V
Response Speed	1 MHz	32 mA @ 2.0 V	
<b>General</b>			
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz		
Card ID	Yes (4-bit)		
Connectors	Female DB37 x 1, 50-pin Box Header x 5		Female DB-37 x 1, 50-pin Box Header x 6
Power Consumption	250 mA @ +5 V	600 mA @ +5 V	1300 mA @ +5 V
Operating Temperature	0°C to +60°C		
Humidity	5 to 85% RH, Non-condensing		

## 6 Ordering Information

<b>PIO-D144U CR</b>	Universal PCI, 144-channel Digital I/O Board (5 V/TTL, RoHS).
<b>PIO-D144LU CR</b>	Universal PCI, 144-channel Digital I/O Board (5 V/CMOS, RoHS).
<b>PIO-D168U CR</b>	Universal PCI, 168-channel Digital I/O Board (RoHS)

**PCI-D96SU****PCI-D128SU**

Universal PCI, 96-ch, 32-bit Digital I/O Board

Universal PCI, 128-ch, 32-bit Digital I/O Board



PCI-D96SU

PCI-D128SU


 **Features ►►►**

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>■ Support the +3.3/+5 V PCI bus</li> <li>■ 96/128 Channels of Digital I/O</li> <li>■ Three/Four 32-bit Bi-direction I/O Ports</li> <li>■ Digital Pattern Generator</li> <li>■ Bi-direction Programmable I/O Ports under Software Control</li> </ul> | <ul style="list-style-type: none"> <li>■ Pattern-matching and Change State Interrupt Monitoring</li> <li>■ DIO Operating Voltage: +1.8 V, +2.5 V, +3.3 V, +5 V</li> <li>■ Pull-high/Pull-low Jumpers for DI Channels</li> <li>■ Supports Card ID (SMD Switch)</li> <li>■ Supports a High-density SCSI II 100-pin Connector</li> </ul> |
|--|---|

 **Introduction**

PCI-D96SU/PCI-D128SU are Universal PCI board. These cards provide 96/128 Digital I/O lines that consist of Three/Four **32-bit** bi-directional ports for use in a variety of Digital I/O applications. Each channel could be setting for Digital Input or Output. They provide a variety of operating voltage (+1.8 V, +2.5 V, +3.3 V and +5 V) for customers need.

The PCI-D96SU/D128SU card include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer. The pull-high/low jumpers allow the DI status to be predefined instead of remaining floating if the DI channels are disconnected or interrupted.

**Hardware Specifications**

3

5

Model	PCI-D96SU		PCI-D128SU					
<b>Programmable DIO</b>								
Channels	96		128					
<b>Digital Input</b>								
Digital Signal Voltage Levels								
Input Voltage	+1.8 V	+1.8 V, +2.5 V, +3.3 V, +5 V Logic 0: < 0.65 V; Logic 1: >1.2 V						
	+2.5 V	Logic 0: < 0.7 V; Logic 1: >1.7 V						
	+3.3 V,	Logic 0: < 0.8 V; Logic 1: >2.0 V						
	+5 V	Logic 0: < 1.5 V; Logic 1: >3.5 V						
Response Speed	1 MHz							
Trigger Mode	Software (Pattern Match, Change of Status)							
Data Transfer	Polling, Interrupt							
<b>Digital Output</b>								
Digital Signal Voltage Levels								
Output Voltage	+1.8 V	+1.8 V, +2.5 V, +3.3 V, +5 V Logic 0: < 0.65 V; Logic 1: >1.2 V						
	+2.5 V	Logic 0: < 0.7 V; Logic 1: >1.7 V						
	+3.3 V,	Logic 0: < 0.8 V; Logic 1: >2.0 V						
	+5 V	Logic 0: < 1.5 V; Logic 1: >3.5 V						
Output Capability	+1.8 V	Sink: 1 mA; Source: 1 mA						
	+2.5 V	Sink: 2 mA; Source: 2 mA						
	+3.3 V,	Sink: 4 mA; Source: 4 mA						
	+5 V	Sink: 5 mA; Source: 5 mA						
Response Speed	1 MHz							
Operation Mode	Static update, Waveform generation							
<b>General</b>								
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz							
Data Bus	32-bit							
Dimensions (L x W)	129 mm x 105 mm							
Connectors	Female SCSI II 100-pin x 1	Female SCSI II 100-pin x 1 20-pin Box Header x 2						
Power Consumption	600 mA @ +5 V	760 mA @ +5 V						
Operating Temperature	0°C ~ +60°C							
Humidity	5 ~ 85% RH, Non-condensing							



## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- DOS Lib and TC Demo
- LabVIEW Demo
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51 PB_00
PA_01	02	52 PB_01
PA_02	03	53 PB_02
PA_03	04	54 PB_03
PA_04	05	55 PB_04
PA_05	06	56 PB_05
PA_06	07	57 PB_06
PA_07	08	58 PB_07
PA_08	09	59 PB_08
PA_09	10	60 PB_09
PA_10	11	61 PB_10
PA_11	12	62 PB_11
PA_12	13	63 PB_12
PA_13	14	64 PB_13
PA_14	15	65 PB_14
PA_15	16	66 PB_15
PA_16	17	67 PB_16
PA_17	18	68 PB_17
PA_18	19	69 PB_18
PA_19	20	70 PB_19
PA_20	21	71 PB_20
PA_21	22	72 PB_21
PA_22	23	73 PB_22
PA_23	24	74 PB_23
GND	25	75 GND
PA_24	26	76 PB_24
PA_25	27	77 PB_25
PA_26	28	78 PB_26
PA_27	29	79 PB_27
PA_28	30	80 PB_28
PA_29	31	81 PB_29
PA_30	32	82 PB_30
PA_31	33	83 PB_31
PC_00	34	84 PC_16
PC_01	35	85 PC_17
PC_02	36	86 PC_18
PC_03	37	87 PC_19
PC_04	38	88 PC_20
PC_05	39	89 PC_21
PC_06	40	90 PC_22
PC_07	41	91 PC_23
PC_08	42	92 PC_24
PC_09	43	93 PC_25
PC_10	44	94 PC_26
PC_11	45	95 PC_27
PC_12	46	96 PC_28
PC_13	47	97 PC_29
PC_14	48	98 PC_30
PC_15	49	99 PC_31
VCC	50	100 VCC

Pin Assignment	Terminal No.	Pin Assignment
PD_00	01	○ ○ 02 PD_08
PD_01	03	○ ○ 04 PD_09
PD_02	05	○ ○ 06 PD_10
PD_03	07	○ ○ 08 PD_11
PD_04	09	○ ○ 10 PD_12
PD_05	11	○ ○ 12 PD_13
PD_06	13	○ ○ 14 PD_14
PD_07	15	○ ○ 16 PD_15
GND	17	○ ○ 18 GND
VCC	19	○ ○ 20 --

CN1(PCI-D128SU only)


  

Pin Assignment	Terminal No.	Pin Assignment
PD_16	01	○ ○ 02 PD_24
PD_17	03	○ ○ 04 PD_25
PD_18	05	○ ○ 06 PD_26
PD_19	07	○ ○ 08 PD_27
PD_20	09	○ ○ 10 PD_28
PD_21	10	○ ○ 12 PD_29
PD_22	12	○ ○ 14 PD_30
PD_23	14	○ ○ 16 PD_31
GND	16	○ ○ 18 GND
VCC	18	○ ○ 20 --

CN2(PCI-D128SU only)

## Accessories

	CA-2002 CR	20-pin flat cable, 20 cm x 2 (RoHS)
	CA-2010 CR	20-pin flat cable, 1 M (RoHS)
	CA-2020 CR	20-pin flat cable, 2 M (RoHS)
	CA-SCSI100-15 CR	SCSI II 100-pin & 100-pin Male connector cable 1.5 M (RoHS)
	CA-SCSI100-30 CR	SCSI II 100-pin & 100-pin Male connector cable 3 M (RoHS)
	DB-24C CR	24-channel of open-collector output board (RoHS)
	DB-24POR CR	24-channel of PhotoMos Relay output board (RoHS)
	DN-20 CR	Two 20-pin header DIN-rail terminal board (RoHS)
	DN-100 CR	I/O Connector Block with DIN-Rail Mounting and 100-Pin SCSI II Connector (RoHS)

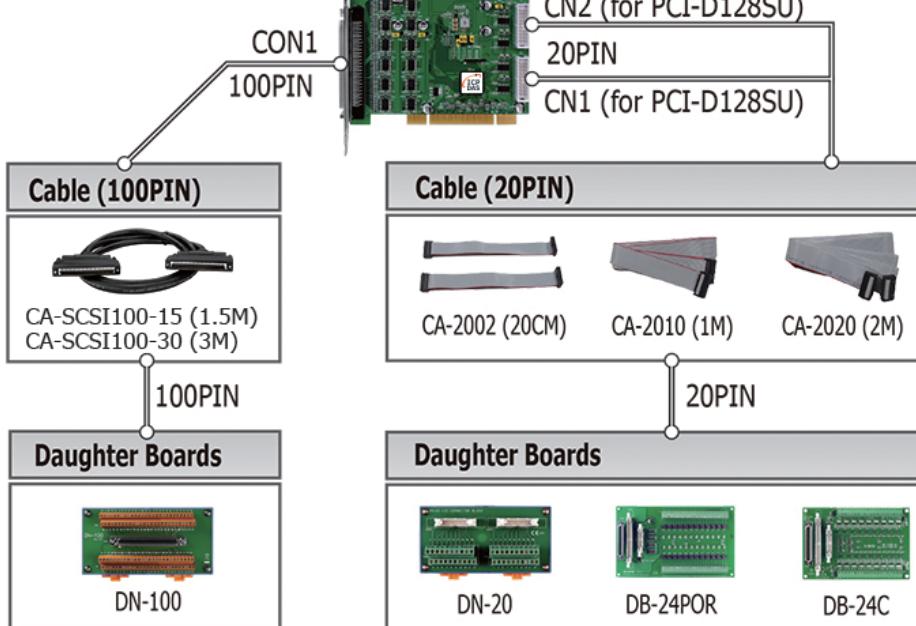

### Ordering Information

<b>PCI-D96SU CR</b>	Universal PCI, 96-ch Digital I/O Board (RoHS)
<b>PCI-D128SU CR</b>	Universal PCI, 128-ch, 32-bit Digital I/O Board (RoHS)

# 4. ISA Bus Data Acquisition Boards



## Multifunction Board Selection Guide

Model	A-826PG	A-823PGL A-823PGH	A-822PGL A-822PGH	A-821PGL A-821PGH	A-812PG	A-8111
Interface	ISA Bus					
<b>Analog Input</b>						
Channels	16 SE/ 8 Diff.	16 SE/ 8 Diff.	16 SE/ 8 Diff.	16 SE/ 8 Diff.	16 S.E.	8 S.E.
Resolution	16-bit	12-bit	12-bit	12-bit	12-bit	12-bit
Sampling Rate	100 kS/s	125 kS/s	125 kS/s	45 kS/s	62.5 kS/s	35 kS/s
<b>Analog Output</b>						
Channels	2	2	2	1	2	1
Resolution	12-bit	12-bit	12-bit	12-bit	12-bit	12-bit
<b>Digital I/O (5 V/TTL)</b>						
DI Channels	16	16	16	16	16	16
DO Channels	16	16	16	16	16	16
<b>Timer/Counter</b>						
Channels	3	3	3	3	3	3

4

1

ISA Bus Data Acquisition Boards



## Isolated Data Acquisition Board Selection Guide

Model	ISO-AD32		ISO-813	ISA-DA 8   16	Model	ISO-P64	ISO-C64	ISO-P32C32	ISO-P32S32W	ISO-730	P8R8 DIO	P16R16 DIO											
	L	H																					
Interface	ISA Bus																						
<b>Isolated Digital Input</b>																							
Channels	64	-	-	-	Channels	32	32	16	8	16													
Isolation Voltage	3750 V <sub>rms</sub>	-	-	-	Isolation Voltage	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	5000 V <sub>rms</sub>													
Input Voltage	9 ~ 24 V	-	-	-	Input Voltage	9 ~ 24 V	5 ~ 24 V	9 ~ 24 V	9 ~ 24 V	5 ~ 24 V													
<b>Isolated Digital Output</b>																							
Channels	-	64	32	32	Channels	16	8	16															
Isolated Voltage	-	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	3750 V <sub>rms</sub>	Isolated Voltage	-	-	-	-	-													
Compatibility	-	Sink	Sink	Sink	Compatibility	-	-	-	-	-													
Relay Type	-	-	-	-	Relay Type	-	-	-	-	-	4 SPDT, 4 SPST	8 SPDT, 8 SPST											
<b>Digital I/O (5 V/TTL)</b>																							
DI Channels	-	-	-	-	DI Channels	-	-	-	-	16	-	-											
DO Channels	-	-	-	-	DO Channels	-	-	-	-	16	-	-											



## Non-isolated Data Acquisition Board Selection Guide

Model	A-726	A-626	A-628	DIO-24	DIO-48	DIO-64/3	DIO-64/6	DIO-96	DIO-144	TMC-10
Interface	ISA Bus									
<b>Analog Output</b>										
Channels	6	6	8	-	-	-	-	-	-	-
Resolution	12-bit	12-bit	12-bit	-	-	-	-	-	-	-
<b>Digital I/O (5 V/TTL)</b>										
DI Channels	16	16	16	-	-	32	-	-	-	8
DO Channels	16	16	16	-	-	32	-	-	-	8
Programmable DI/O	-	-	-	24	48	-	-	96	144	-
<b>Timer/Counter</b>										
Channels	-	-	-	-	-	3	3	6	-	10

## 4-1 Multifunction Boards

### 16-channel, 100 kS/s 16-bit AD, 2-channel 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-826PG**

- ISA Bus Interface
- 16 Single-ended/8 Differential Analog Input Channels
- 16-bit, 100 kS/s Sampling Rate
- 2-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain: 0.5, 1, 2, 4, 8
- Trigger Mode: Software, Pacer, External, Event
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

### 16-channel, 125 kS/s 12-bit AD, 2-channel Unipolar/Bipolar 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-823PGL**  
**A-823PGH**

- ISA Bus Interface
- 16 Single-ended/8 Differential Analog Input Channels
- 12-bit, 125 kS/s Sampling Rate
- 2-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V, ±5 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain:
  - > PGL: 0.5, 1, 2, 4, 8
  - > PGH: 0.5, 1, 5, 10, 50, 100, 500, 1000
- Trigger Mode: Software, Pacer, External, Event
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

### 16-channel, 125 kS/s 12-bit AD, 2-channel Unipolar 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-822PGL**  
**A-822PGH**

- ISA Bus Interface
- 16 Single-ended/8 Differential Analog Input Channels
- 12-bit, 125 kS/s Sampling Rate
- 2-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain:
  - > PGL: 0.5, 1, 2, 4, 8
  - > PGH: 0.5, 1, 5, 10, 50, 100, 500, 1000
- Trigger Mode: Software, Pacer, External, Event
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

### 16-channel, 45 kS/s 12-bit AD, 1-channel 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-821PGL**  
**A-821PGH**

- ISA Bus Interface
- 16 Single-ended/8 Differential Analog Input Channels
- 12-bit, 45 kS/s Sampling Rate
- 1-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain:
  - > PGL: 1, 2, 4, 8
  - > PGH: 1, 10, 100, 1000
- Trigger Mode: Software, Pacer
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

### 16-channel, 62.5 kS/s 12-bit AD, 2-channel 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-812PG**

- ISA Bus Interface
- 16 Single-ended Analog Input Channels
- 12-bit, 62.5 kS/s Sampling Rate
- 2-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain: 0.5, 1, 2, 4, 8
- Trigger Mode: Software, Pacer, External
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

### 8-channel, 35 kS/s 12-bit AD, 1-channel 12-bit DA and 16-channel TTL DIO Multifunction Board



**A-8111**

- ISA Bus Interface
- 8 Single-ended Analog Input Channels
- 12-bit, 35 kS/s Sampling Rate
- 1-channel, 12-bit Analog Output
- Analog Output Range: 0 ~ +5 V, 0 ~ +10 V
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Software Programmable Gain: 1, 2, 4, 8, 16
- Trigger Mode: Software, Pacer
- Data Transfer Mode: Polling, Interrupt
- 1-channel General-purpose Programmable 16-bit Counter/Timer

## 4-2 Isolated Data Acquisition Boards

### 32-channel, 12-bit, 200 kS/s Isolated Analog Input Board



**ISO-AD32L**  
**ISO-AD32H**

- ISA Bus Interface
- 32 Single-ended/16 Differential Analog Input Channels
- Built-in DC/DC Converter with 1000 V<sub>DC</sub> Isolation
- 5000 V<sub>rms</sub> Photo-isolation Protection
- 12-bit Sampling Rate, 200 kHz Max.
- Built-in 1 KB FIFO
- Gap-free AD Conversion
- Automatic Channel/Gain Scan

### 32-channel, 12-bit, 10 kS/s Isolated Analog Input Board



**ISO-813**

- ISA Bus Interface
- 32 Single-ended Analog Input Channels
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- 3000 V<sub>rms</sub> Photo-isolation Protection
- 12-bit Sampling Rate, 10 kHz Max.
- Trigger Mode: Software
- Transfer Mode: Polling
- Programmable Gain: 1, 2, 4, 8, 16

### 8/16-channel, 14-bit, Isolated Analog Output Board



**ISO-DA8**  
**ISO-DA16**

- ISA Bus Interface
- 8/16-channel, 14-bit Analog Output
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- 2500 V<sub>rms</sub> Photo-isolation Protection
- Software Calibration
- 0 ~ 20 mA Current Sink
- Double-buffered DA Latch

### 64-channel, Optically-isolated Digital I/O Board



**ISO-C64**



**ISO-P64**

- ISA Bus Interface
- ISO-P64:
  - > 64-channel Optically-isolated DI
  - > Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- ISO-C64:
  - > 64-channel Optically-isolated Open-collector DO (Sink, NPN)
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Two Interrupt Sources

### 32-channel, Optically-isolated DI and 32-channel Optically-isolated Open-collector Output Board



**ISO-P32C32**

- ISA Bus Interface
- 32-channel Optically-isolated Open-collector Output (Sink, NPN)
- 32-channel Optically-isolated Digital Input
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- Two Interrupt Sources

### 32-channel, Optically-isolated DI and 32-channel Optically-isolated Open-collector Output Board (8-ch for 500 mA)



**ISO-P32S32W**

- ISA Bus Interface
- 32-channel Optically-isolated Open-collector Output (Sink, NPN)
  - > 100 mA (24-channel) Low Driving
  - > 500 mA (8-channel) High Driving
- 32-channel Optically-isolated Digital Input
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Two Interrupt Sources

### 32-channel, Isolated Digital I/O and 32-channel TTL Digital I/O Board



**ISO-730**

- ISA Bus Interface
- 16-channel Optically-isolated Open-collector Output (Sink, NPN)
- 16-channel Optically-isolated Digital Input
- 3750 V<sub>rms</sub> Photo-isolation Protection
- Built-in DC/DC Converter with 3000 V<sub>DC</sub> Isolation
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Two Interrupt Sources

### 8/16-channel, Isolated Digital Input and 8/16-channel Relay Output Board



**P8R8DIO**



**P16R16DIO**

- ISA Bus Interface
- 8/16-channel Optically-isolated Digital Input
- 8/16-channel Relay Output
- AC/DC Signal Input
- AC Signal Input with Filter
- Relay Status LED Indicators
- Power Requirements:
  - > 200 mA @ +5 V (Max.)
  - > 260 mA @ +12 V (Max.)

## 4-3 Non-isolated Data Acquisition Boards

4

3

### 6-channel, 12-bit Analog Output Board

**A-726**

- ISA Bus Interface
- 6-channel, 12-bit Analog Output
- Voltage Output Range:  
0 ~ +5 V, 0 ~ +10 V, ±5 V, ±10 V
- Current Output Range: 4 ~ 20 mA
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Connectors: 20-pin Box Header x 4

### 6-channel, 12-bit Analog Output Board

**A-626**

- ISA Bus Interface
- 6-channel, 12-bit Analog Output
- Voltage Output Range:  
0 ~ +5 V, 0 ~ +10 V, ±5 V, ±10 V
- Current Output Range: 4 ~ 20 mA
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Connectors: Female DB-37 x 1 and  
20-pin Box Header x 4

### 8-channel, 12-bit Analog Output Board

**A-628**

- ISA Bus Interface
- 8-channel, 12-bit Analog Output
- Voltage Output Range:  
0 ~ +5 V, 0 ~ +10 V, ±5 V, ±10 V
- Current Output Range: 4 ~ 20 mA
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Connectors: Female DB-37 x 1 and  
20-pin Box Header x 4

### 24-channel, OPTO-22 Compatible Digital I/O Board

**DIO-24**

- ISA Bus Interface
- 24-channel Digital Input/Output
- All I/O lines are buffered on the Board
- Emulates one Industrial-standard  
8255 PPI Ports (Mode 0)
- Direct Interface with OPTO-22  
Compatible I/O Modules
- Programmable Interrupt Source
- Supports Output Status Readback

### 48-channel, OPTO-22 Compatible Digital I/O Board

**DIO-48**

- ISA Bus Interface
- 48-channel Digital Input/Output
- All I/O lines are buffered on the Board
- Emulates one Industrial-standard  
8255 PPI Ports (Mode 0)
- Direct Interface with OPTO-22  
Compatible I/O Modules
- 1-channel 16-bit Timer/Counter
- 4 Clock Sources
- Programmable Interrupt Source

### 32-channel DI, 32-channel DO with Timer/Counter Board

**DIO-64/3**  
**DIO-64/6**

- ISA Bus Interface
- 32-channel Digital Input
- 32-channel Digital Output
- DIO-64/3: 3 Independent Programmable  
16-bit Down Counters
- DIO-64/6: 6 Independent Programmable  
16-bit Down Counters
- 4 Clock Sources
- 3 Frequency Dividers: 100, 10, 1
- 1-channel 16-bit Counter, 1-channel 32-bit Timer with a 4 MHz  
Clock Source
- Interrupt Source Triggers: Timer, Event, External

### 96/144-channel, OPTO-22 Compatible Digital I/O Board

**DIO-96**

- ISA Bus Interface
- DIO-96: 96-channel Digital Input/Output
- DIO-144: 144-channel Digital Input/Output
- Direct Interface with OPTO-22 Compatible  
I/O Modules
- Emulates 6/4 Industrial-standard 8255  
PPI Ports (Mode 0)
- Supports Output Status Readback
- Programmable Interrupt Source

**DIO-144**

### 10-channel, Timer/Counter Board

**TMC-10**

- ISA Bus Interface
- Four 8254 Timer/Counter Chips
- 2 Internal Clock Sources:  
8 MHz /1.6 MHz, and 0.8 MHz/80 kHz
- 8 Independent 16-bit Timers/Counters
- 8 External Clock Inputs
- 8 External Gate Control Signals
- 8-bit General purpose Digital Output
- 2 Cascaded 32-bit Timers/Counters
- 11 Jumper-selectable Interrupt Levels



## 5-1 Memory Board

### PCI-M512EU

Universal PCI, 512 KB MRAM Board with Digital I/O



#### Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 512 KB MRAM Onboard
  - ▶ Non-volatile Random-access Memory Technology
  - ▶ Retains Data when Power is Turned Off
  - ▶ Unlimited Write Endurance
- 16-channel, 5 V/TTL Digital Output
- 12-channel, 5 V/TTL Digital Input



#### Software

##### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10     Linux

##### Sample Programs

- DOS Lib and TC/BC/MSC Demo     LabVIEW  
 VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

#### Introduction

The PCI-M512EU is a 512 KB MRAM (Magnetoresistive Random Access Memory) board and supports both the 3.3 V and the 5 V Universal PCI bus. The PCI-M512EU provides 12 Digital Input channels and 16 Digital Output channels to connect various devices.

The MRAM is a non-volatile random-access memory technology that the fairly new type of memory. The main features of MRAM include unlimited write endurance, read and write cycles with no delay and data retention even after power loss, so the data can be saved permanently. The PCI-M512EU is an ideal solution for improving system reliability when the power outage.



#### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	○ ○	02	DO 1	
DO 2	03	○ ○	04	DO 3	
DO 4	05	○ ○	06	DO 5	
DO 6	07	○ ○	08	DO 7	
DO 8	09	○ ○	10	DO 9	
DO 10	10	○ ○	12	DO 11	
DO 12	12	○ ○	14	DO 13	
DO 14	14	○ ○	16	DO 15	
GND	16	○ ○	18	GND	
+5 V	18	○ ○	20	+12 V	
		CN1		CN2	

5

1

Special Function Boards

#### Hardware Specifications

##### Digital Input

Channels	12
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	1.4 MHz (Typical)

##### Digital Output

Channels	16
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.
Output Capability	Sink: 2.4 mA @ 0.8 V Source: 0.8 mA @ 2.0 V
Response Speed	1.4 MHz (Typical)

##### Special

Size	512 KB
------	--------

##### General

Bus Type	3.3 V / 5 V Universal PCI, 32-bit, 33 MHz
Connectors	20-pin Box Header x2
Power Consumption	420 mA @ +5 V
Operating Temperature	-20°C to +60°C
Humidity	0 to 90% RH, Non-condensing

#### Ordering Information

PCI-M512EU CR	Universal PCI, 512 KB MRAM Board with DI/O (RoHS).
---------------	--

## 5-2 Counter/Frequency Board

### PCI-FC16U

Universal PCI, 16-channel Counter/Frequency with  
32-channel Programmable Digital I/O Board



### Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 32-channel Programmable Digital I/O
- 16-channel Up Counter or Frequency Measurement  
(Pulse Width = 2 µs Min.)
- Digital Filter: 1 to 32767 (µs)
- Pull-high and Pull-low Resistors for DI Channels
- Supports Card ID (SMD Switch)

### Introduction

PCI-FC16U is a 32-bit hardware-type high-speed Counter/Frequency card that supports both the 3.3 V and the 5 V Universal PCI bus. The card provides 16 channels that can be individually configured for either frequency measurement or up-counter applications, and can support high-frequency signals up to 250 kHz. The PCI-FC16U also includes 32 programmable Digital I/O channels.

The PCI-FC16U card includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer. The pull-high/pull-low resistors allow the DI status to be predefined as either high or low instead of remaining floating if the DI channels are disconnected or interrupted.

### Software

#### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

#### Sample Programs

VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET Demo

### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
C0+	01	20 CO-
C1+	02	21 C1-
C2+	03	22 C2-
C3+	04	23 C3-
C4+	05	24 C4-
C5+	06	25 C5-
C6+	07	26 C6-
C7+	08	27 C7-
N.C.	09	28 N.C.
C8+	10	29 C8-
C9+	11	30 C9-
C10+	12	31 C10-
C11+	13	32 C11-
C12+	14	33 C12-
C13+	15	34 C13-
C14+	16	35 C14-
C15+	17	36 C15-
N.C.	18	37 N.C.
N.C.	19	

Pin Assignment	Terminal No.	Pin Assignment
PB 0	01	O O 02 PB 1
PB 2	03	O O 04 PB 3
PB 4	05	O O 06 PB 5
PB 6	07	O O 08 PB 7
PB 8	09	O O 10 PB 9
PB 10	10	O O 12 PB 11
PB 12	12	O O 14 PB 13
PB 14	14	O O 16 PB 15
GND	16	O O 18 GND
+5 V	18	O O 20 +12 V

Pin Assignment	Terminal No.	Pin Assignment
PA 0	01	O O 02 PA 1
PA 2	03	O O 04 PA 3
PA 4	05	O O 06 PA 5
PA 6	07	O O 08 PA 7
PA 8	09	O O 10 PA 9
PA 10	11	O O 12 PA 11
PA 12	13	O O 14 PA 13
PA 14	15	O O 16 PA 15
GND	17	O O 18 GND
+5 V	19	O O 20 +12 V



### Hardware Specifications

Counter/Frequency		
Counter/Frequency		16-channel Up Counter
Resolution		16-channel Frequency
Digital Noise Filter		32-bit
Min. Pulse Width		1~32767 µs
Isolated		2500 V <sub>DC</sub>
Input Level	ON Voltage	+4.5 ~ +30 V <sub>DC</sub>
Input Level	OFF Voltage	+1 V <sub>DC</sub> Max.
ESD Protection		2 KV (Contact for each Channel)
Programmable I/O		
Channels		32
Digital I/O		
Input Voltage	Logic 0	0.8 V (Max.)
	Logic 1	2.0 V (Min.)
Output Voltage	Logic 0	0.4 V (Max.)
	Logic 1	2.4 V (Min.)
Output Capability	Sink	2.4 mA @ 0.8 V
	Source	0.8 mA @ 2.0 V
General		
Bus Type		3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID		Yes (4-bit)
Connectors		Female DB37 x 1 20-pin Box Header x 2
Power Consumption		700 mA @ +5 V
Operating Temperature		0°C to +60°C
Humidity		5 to 85% RH, Non-condensing

### Ordering Information

PCI-FC16U CR	Universal PCI, 16-channel Counter/Frequency with 32-channel Programmable Digital I/O (RoHS). Includes one CA-4002 D-sub Connector.
--------------	--

# PCI-TMC12AU

Universal PCI, 12-ch Timer/Counter Board



## Features ►►►

- Universal PCI (3.3 V/5 V) Interface
- 4 Onboard 8254 Timer/Counter Chips
- 12 Independent 16-bit Timers/Counters
- 12 External Clock Input Channels
- 12 Timer/Counter Output Channels
- 4 Interrupt Sources and More Flexible Interrupt Mechanism
- 2 Internal Clock Sources
- 16-bit Timer/Counter can be cascaded to create a 32/48-bit Timer/Counter
- 16-channel, 5 V/TTL Digital Input
- 16-channel, 5 V/TTL Digital Output
- Gate Input can be sourced from External or Previous Timer/Counter Output
- Supports Card ID (SMD Switch)
- Supports DO Status Readback
- Hardware Mechanism to generate two Starting Clocks

## Introduction

The PCI-TMC12AU card is designed as a direct replacement for the PCI-TMC12A without requiring any modification to the software or the driver.

The PCI-TMC12AU Universal PCI cards support the 3.3 V/5 V PCI bus, and provide twelve 16-bit timers/counters (four 82C54 chips x 3 timers/counters), 16 TTL Digital Input channels and 16 TTL Digital Output channels. The two onboard clocks (8 M/1.6 M and 0.8 M/80 K) are jumper selectable and provide a high-resolution clock source for timers/counters. Counters/timers can be used for industrial and laboratory applications such as pulse/event/switch-toggle counting, frequency readings, elapsed time measurement, pulse-width measurement, PWM (pulse-width-modulated) output, and pulse (square wave) and rate generation, etc.

## Software

### Drivers

32/64-bit Windows XP/2003/2008/7/8/10

Linux

### Sample Programs

DOS Lib and TC Demo

LabVIEW Toolkit

VB/VC/Delphi/BCB/MATLAB Demo

VB.NET/C#.NET/VC.NET Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
ECLK1	01	20	EXTG1	01	O O
COUT1	02	21	ECLK2	03	O O
EXTG2	03	22	COUT2	04	O O
ECLK3	04	23	EXTG3	05	O O
COUT3	05	24	ECLK4	06	O O
EXTG4	06	25	COUT4	07	O O
ECLK5	07	26	EXTG5	08	GND
COUT5	08	27	ECLK6	09	+5 V
EXTG6	09	28	COUT6	10	CON2
ECLK7	10	29	EXTG7	11	
COUT7	11	30	ECLK8	12	
EXTG8	12	31	COUT8	13	
ECLK9	13	32	EXTG9	14	
COUT9	14	33	ECLK10	15	
EXTG10	15	34	COUT10	16	
ECLK11	16	35	EXTG11	17	
COUT11	17	36	ECLK12	18	
EXTG12	18	37	COUT12	19	
GND	19				
CON1					

Pin Assignment	Terminal No.	Pin Assignment	Terminal No.	Pin Assignment
O O	01	O O	02	DO 1
O O	03	O O	04	DO 3
O O	05	O O	06	DO 5
O O	07	O O	08	DO 7
O O	09	O O	10	DO 9
O O	11	O O	12	DO 11
O O	13	O O	14	DO 13
O O	15	O O	16	DO 15
GND	16	O O	18	GND
+5 V	17	O O	20	+12 V
CON3				

## Hardware Specifications

### Digital Input

Channels	16
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	1.0 MHz (Typical)

### Digital Output

Channels	16
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.
Output Capability	Sink: 24 mA @ 0.8 V Source: 15 mA @ 2.0 V
Response Speed	1.0 MHz (Typical)

### Timer/Counter

Channels	12 (Independent x 12)
Resolution	16-bit
Input Frequency	10 MHz Max.
Reference Clock	Internal: 8 MHz

### General

Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1 20-pin Box Header x 2
Power Consumption	500 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

## Ordering Information

PCI-TMC12AU CR	Universal PCI, 12-ch Timer/Counter Board (RoHS) Includes one CA-4002 D-Sub connector
----------------	---

## PEX-TMC12A

PCI Express, 12-ch Timer/Counter Board



### Features ►►►

- Supports PCI Express x 1
- 4 onboard 8254 timer/counter chips
- 12 independent 16-bit timers/counters
- 12 external clock inputs
- 12 external gate control inputs
- 12 timer/counter output channels
- 16-bit timer/counter can be cascaded to create 32/48-bit timer/counter
- Gate input can be either an external signal or the output of a previous timer/counter channel
- Four interrupt sources
- Two internal clock sources
- 16 TTL D/I channels and 16 TTL D/O channels
- Supports Card ID (SMD Switch)
- Supports DO Status Readback
- More flexible interrupt mechanism
- Hardware mechanism for the generation of two starting-clocks

### Introduction

The PEX-TMC12A utilizes the PCI Express bus and is designed as an easy replacement for the PCI-TMC12A series without requiring any modification to either the software or the driver.

The PEX-TMC12A provides twelve 16-bit timers/counters (four 82C54 chips x 3 timers/counters), 16 TTL digital input channels and 16 TTL digital output channels. The two onboard clocks (8 M/1.6 M and 0.8 M/80 K) are jumper selectable and provide a highresolution clock source for timers/counters. Counters/timers can be used for industrial and laboratory applications such as pulse/ event/switch-toggle counting, frequency readings, elapsed time measurement, pulse-width measurement, PWM (pulse-widthmodulated) output, and pulse (square wave) and rate generation, etc.

The PEX-TMC12A includes a Card ID switch that enables the board to be easily recognized via software if two or more cards are installed in the same computer.

### Software

#### Drivers

- 32/64-bit Windows XP/2003/2008/7/8/10
- Linux

#### Sample Programs

- DOS Lib and TC Demo       LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo       VB.NET/C#.NET/VC.NET Demo



### Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Terminal No.	Pin Assignment
ECLK1	01	EXTG1	01	DI 0
COUT1	02	20	03	DI 2
EXTG2	03	21	05	DI 4
ECLK3	04	22	07	DI 6
COUT3	05	23	09	DI 8
EXTG4	06	24	11	DI 10
ECLK5	07	25	13	DI 12
COUT5	08	26	15	DI 14
EXTG6	09	27	17	GND
ECLK7	10	28	19	+5 V
COUT7	11	29	EXTG7	CON2
EXTG8	12	30	ECLK8	
ECLK9	13	31	COUT8	
COUT9	14	32	EXTG9	
EXTG10	15	33	ECLK10	
ECLK11	16	34	COUT10	
COUT11	17	35	EXTG11	
EXTG12	18	36	ECLK12	
GND	19	37	COUT12	
				CON1
				CON3



### Hardware Specifications

#### Digital Input

Channels	16
Compatibility	5 V/TTL
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.
Response Speed	500 kHz

#### Digital Output

Channels	16
Compatibility	5 V/TTL
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.
Output Capability	Sink: 24 mA @ 0.8 V Source: 15 mA @ 2.0 V
Response Speed	500 kHz

#### Timer/Counter

Channels	12 (Independent x 12)
Resolution	16-bit
Input Frequency	10 MHz Max.
Reference Clock	Internal: 8 MHz

#### General

Bus Type	PCI Express x 1
Card ID	Yes (4-bit)
Connectors	Female DB37 x 1 20-pin Box Header x 2
Power Consumption	500 mA @ +5 V
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing



### Ordering Information

PEX-TMC12A CR	PCI Express, 12-ch Timer/Counter Board (RoHS) Includes one CA-4002 D-Sub connector.
---------------	--

## 5-3 Watchdog Boards

### WDT-03

Intelligent Watchdog Timer Board



#### Features ►►►

- No need to modify the original program
- Can be used in ISA bus, PCI bus or any system with an RS-232 interface
- Early detection and warning prevents system failure in harsh environments
- Cost-effective Solution

#### Introduction

PC hardware and/or software may sometimes fail for whatever reason. To prevent failure, a wide variety of different solutions have been proposed. However, none of these solutions can offer a 100% assurance. Since preventing a failure is difficult, detecting a failure becomes increasingly important. The WDT-03 is used to detect failures in both the software and the hardware, and can also be used to reduce the risks involved in potential PC failures. The WDT-03 is useful even for those systems that include a built-in watchdog circuit.

The WDT-03 includes a software utility for windows that can be used to monitor the status of the system. If the system malfunctions, the WDT-03 can send an alarm via the Digital Output, and if the system fails, the WDT-03 can automatically reset the system. The WDT-03 Utility is executed when Windows starts and can be accessed from the Taskbar Notification Area ("System Tray"). On a Windows NT system, the WDT-03 utility will record an event so that, when Windows NT is restarted, the system automatically logs into the administrator account. The WDT-03 Utility uses very few system resources, but can be used to monitor a variety of the system information, such as the voltage, the temperature, and the fan speed and system errors.

The WDT-03 is able to control a 3-channel Digital Input terminal and a 3-channel signal relay output from its attached DB-3R daughterboard.



#### Software

##### Drivers

- |   |   |
|---|---|
| <input checked="" type="checkbox"/> Windows 95/98/NT/2000 | <input checked="" type="checkbox"/> Linux |
| <input checked="" type="checkbox"/> 32-bit Windows XP     | <input checked="" type="checkbox"/> DOS   |



#### Pin Assignments


Pin Assignment	Terminal	No.	Pin Assignment
GND	05	09	NC
NC	04	08	NC
RxD	03	07	NC
TxD	02	06	NC
NC	01		
CN1 (RS-232)			9-pin Male D-sub Connector

Pin Assignment	Terminal	No.	Pin Assignment
GND	05	09	DO_3
DO_2	04	08	DO_1
Power	03	07	DI_1
TxD	02	06	DI_2
DI_3	01		
CN2 (RS-232)			9-pin Female D-sub Connector



#### Ordering Information

<b>WDT-03</b>	Intelligent Watchdog Timer Card. Includes one CA-0205 (2-pin Black and Red Cable, 0.5 m) and one CA-0910F (9-pin Female-Female D-sub Cable, 1.0 m).
---------------	--

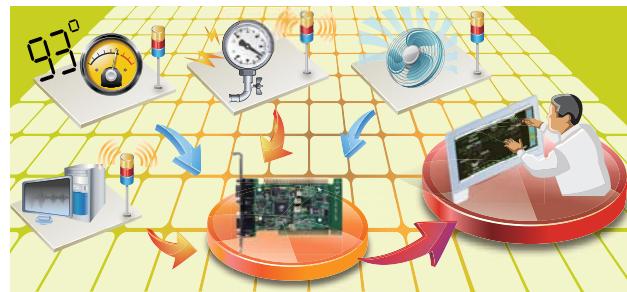

#### Hardware Specifications

Interface	RS-232 x 1 for Local CPU
	RS-232 x 1 for Remote Host (for monitoring the Local)
	Four through-hole mounting for any system with RS-232
Watchdog Timer	Enabled/Disabled via Software; from 0.03 to 1966.05 seconds
Baud Rate	2400 ~ 115200 bps
Data Bit	8
Stop Bit	1
Parity	None
Bus Voltage Monitoring	-12 V, -5 V, +3.3 V, +5 V, +12 V
Fan Speed Monitoring	3 channels
Temperature Monitoring	3 channels
EEPROM	63 Bytes
Read/Write Cycles	100,000 Times
Reset Mechanism	Power-good Signal for the PC System
	Reset Signal that simulates when an external Reset Key is pressed
<b>General</b>	
Bus Type	ISA bus and PCI bus
Connectors	Male DB9 x 1 Female DB9 x 1
Power Consumption	2 W
Operating Temperature	0°C to +60°C
Humidity	5 to 85% RH, Non-condensing

# 6. Daughter Boards and Accessories

## 6-1 Daughter Boards (Screw Terminal Boards)



### Digital I/O Daughter Board Selection Guide

★: Full-function Support

☆: Uses a 20-pin Header, 16-channel Support only (Cable Option: /F)

Model	DB-16R	DB-24R	DB-24PR	DB-24C	DB-24OD	DB-24POR	DB-24SSR	DB-16P8R	DB-16P	DB-24P
Function	Digital Output (DO)								DI/DO	Digital Input (DI)
DIN-Rail Mounting	-	Option	Option	Option	Option	Option	Option	Option	Option	-
Page	6-4	6-4	6-4	6-4	6-4	6-5	6-5	6-5	6-4	6-4
<b>PCI Express/PCI Bus, Non-isolated AD, DA Board</b>										
PEX-1002L/H	★	-	☆	☆	☆	☆	☆	-	-	-
PEX-1202L/H	★	-	☆	☆	☆	☆	☆	-	-	-
PEX-DA4/DA8/DA16	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-1802LU/HU	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-1800LU/HU	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-1602U/FU	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-1202LU/HU	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-1002LU/HU	★	-	☆	☆	☆	☆	☆	-	-	-
PIO-821H/L	★	-	☆	☆	☆	☆	☆	-	-	-
PIO-DA4U/DA8U/DA16U	★	-	☆	☆	☆	☆	☆	-	-	-
PISO-DA4U/DA8U/DA16U	★	-	☆	☆	☆	☆	☆	-	-	-
<b>PCI Express/PCI Bus, Digital I/O Board</b>										
PEX-D24	-	★	★	★	★	★	★	★	★	-
PEX-D48	-	★	★	★	★	★	★	★	★	-
PEX-D56	★	★	☆	★	★	★	★	★	★	★
PEX-730	★	-	☆	☆	☆	☆	☆	-	-	-
PIO-D24U	-	★	★	★	★	★	★	★	★	-
PIO-D48U	-	★	★	★	★	★	★	★	★	-
PIO-D56U	★	★	☆	★	★	★	★	★	★	★
PIO-D64U	★	-	☆	☆	☆	☆	☆	-	-	-
PIO-D96U	-	★	★	★	★	★	★	★	★	-
PIO-D144U/D144LU	-	★	★	★	★	★	★	★	★	-
PIO-D168U	-	★	★	★	★	★	★	★	★	-
PCI-M512U	★	-	☆	☆	☆	☆	☆	-	-	-
PISO-730U/730-5V	★	-	☆	☆	☆	☆	☆	-	-	-
PISO-730AU(-5V)	★	-	☆	☆	☆	☆	☆	-	-	-
PCI-TMC12A	★	-	☆	☆	☆	☆	☆	-	-	-
<b>ISA Bus, Non-isolated AD, DA Board</b>										
A-826PG	★	-	☆	☆	☆	☆	☆	-	-	★
A-823PGL/PGH	★	-	☆	☆	☆	☆	☆	-	-	★
A-822PGL/PGH	★	-	☆	☆	☆	☆	☆	-	-	★
A-821PGL/PGH	★	-	☆	☆	☆	☆	☆	-	-	★
A-812PG	★	-	☆	☆	☆	☆	☆	-	-	★
A-8111	★	-	☆	☆	☆	☆	☆	-	-	★
A-726/626/628	★	-	☆	☆	☆	☆	☆	-	-	★
<b>ISA Bus, Isolated DA Board</b>										
ISO-DA8/DA16	★	-	☆	-	-	☆	-	-	-	★
<b>ISA Bus, Digital I/O Board</b>										
DIO-96/144	-	★	★	★	★	★	★	★	★	-
DIO-64	★	-	☆	☆	☆	☆	☆	-	-	★
DIO-48	-	★	★	★	★	★	★	★	★	-
DIO-24	-	★	★	★	★	★	★	★	★	-
ISO-730	★	-	☆	☆	☆	☆	☆	-	-	★

 General Purpose Daughter Board Selection Guide for PCI Bus I/O Boards

●: Recommended Daughter Board    ○: Connects to 20-pin Header only (Digital I/O)

Model	DB-32R DB-16P16R	DB-8025	DB-8125	DB-8225	DB-8325	DB-8425	DB-1825	DB-889D	DB-37	DN-20	DN-37	DN-50	DN-68A	DN-100	
Function	Relay Output	Analog Input Screw Terminal Board							MUX	General Purpose Screw Terminal Board					
DIN-Rail Mounting	Option	-	-	Option	-	-	Option	-	-	Standard					
Page	6-4	6-5	6-5	6-5	6-6	6-6	6-5	6-5	6-5	6-6	6-6	6-6	6-6	6-6	6-6
<b>PCI Express/PCI Bus, Non-isolated AD, DA Board</b>															
PEX-1002L/H	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PEX-1202L/H	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PEX-DA4/DA8/DA16	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PCI-2602U	-	-	-	-	-	-	-	-	-	-	-	-	●	-	-
PCI-1802LU/HU	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PCI-1800LU/HU	-	○	○	●	-	-	-	●	●	○	●	-	-	-	-
PCI-1602U/FU	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PCI-1202LU/HU	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PCI-1002LU/HU	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PCI-822LU/826LU	-	○	○	-	-	-	●	-	●	○	●	-	-	-	-
PIO-821H/L	-	○	○	●	-	-	-	●	●	○	●	-	-	-	-
PIO-DA4U/DA8U/DA16U	-	○	○	-	-	-	-	-	●	○	●	-	-	-	-
<b>PCI Bus, Isolated AD, DA Board</b>															
PISO-813	-	-	-	-	●	-	-	-	●	-	●	-	-	-	-
PISO-DA2U	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-
PISO-DA4U/DA8U/DA16U	-	○	○	-	-	-	-	-	●	-	●	-	-	-	-
<b>PCI Express/PCI Bus, Isolated Digital I/O Board</b>															
PEX-P8R8i/P16R16i	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-P8POR8i/P16POR16i	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-P64(-24V)	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-C64	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-P32C32/P32A32	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-730	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PCI-P16R16U	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PCI-P16C16	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PCI-P16POR16U	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-P8R8U/P8SSR8	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-P32A32U(-5V)	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-P32C32U(-5V)	●DB-16P16R	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-P64U(-24V)	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-C64U	●DB-32R	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-A64	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PISO-730U(-5V)	-	○	○	-	-	-	-	-	●	○	●	-	-	-	-
PISO-730AU(-5V)	-	○	○	-	-	-	-	-	●	○	●	-	-	-	-
PISO-725	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
<b>PCI Express/PCI Bus, Digital I/O Board</b>															
PEX-D24	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PEX-D48	-	-	-	-	-	-	-	-	●	-	●	-	●	-	-
PEX-D56	-	○	○	-	-	-	-	-	●	○	●	●	-	-	-
PEX-D96S	-	-	-	-	-	-	-	-	-	-	-	-	-	●	-
PEX-D144S	-	-	-	-	-	-	-	-	-	-	-	-	●	-	●
PIO-D24U	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-
PIO-D48U	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-
PIO-D48SU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
PIO-D56U	-	○	○	-	-	-	-	-	●	○	●	●	-	-	-
PIO-D64U	-	●	●	-	-	-	-	-	●	●	●	●	-	-	-
PIO-D96U	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-
PIO-D96SU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
PIO-D144U/D144LU	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-
PIO-D168U	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-
PCI-M512	-	●	●	-	-	-	-	-	●	-	-	-	-	-	-
<b>PCI Bus, Timer/Counter Board</b>															
PCI-TMC12A	-	○	○	-	-	-	-	-	●	○	●	-	-	-	-



## General Purpose Daughter Board Selection Guide for ISA Bus I/O Boards

●: Recommended Daughter board ○: Connects to 20-pin Header only (Digital I/O)

Model	DB-32R DB-16P16R	DB-8025	DB-8125	DB-8225	DB-8325	DB-1825	DB-889D	DB-37	DN-20	DN-25	DN-37	DN-50		
Function	Relay Output	Analog Input Screw Terminal Board						MUX		General Purpose Screw Terminal Board				
DIN-Rail Mounting	Option	-	-	Option	-	Option	-	Option	Standard					
Page	6-4	6-5	6-5	6-5	6-6	6-5	6-5	6-5	6-6	6-6	6-6	6-6	6-6	
<b>ISA Bus, Non-isolated AD, DA Board</b>														
A-826PG	-	○	○	●	-	-	●	●	○	-	●	-	-	
A-823/822/821 PGL/PGH	-	○	○	●	-	-	●	●	○	-	●	-	-	
A-812PG	-	●	●	-	-	-	-	-	●	-	-	-	-	
A-8111	-	○	○	●	-	-	●	●	○	-	●	-	-	
A-628/626	-	○	○	-	-	-	-	●	○	-	●	-	-	
A-726	-	○	○	-	-	-	-	-	●	-	-	-	-	
<b>ISA Bus, Isolated AD, DA Board</b>														
ISA-AD32L/H	-	-	-	-	-	-	●	-	●	-	-	●	-	
ISO-813	-	-	-	-	●	-	-	-	●	-	-	●	-	
ISO-DA8/DA16	-	○	○	-	-	-	-	●	○	-	●	-	-	
<b>ISA Bus, Isolated Digital I/O Board</b>														
P16R16DIO/P8R8DIO	-	-	-	-	-	-	-	●	-	-	●	-	-	
ISO-P32C32	●DB-16P16R	-	-	-	-	-	-	-	●	-	-	●	-	
ISO-P64	-	-	-	-	-	-	-	●	-	-	●	-	-	
ISO-C64	●DB-32R	-	-	-	-	-	-	●	-	-	●	-	-	
ISO-730	-	○	○	-	-	-	-	●	○	-	●	-	-	
<b>PCI Express/PCI Bus, Digital I/O Board</b>														
DIO-24/48	-	-	-	-	-	-	-	-	-	-	-	-	●	
DIO-64	-	●	●	-	-	-	-	-	●	●	●	-	-	
DIO-96/144	-	-	-	-	-	-	-	-	-	-	-	-	●	
<b>ISA Bus, Timer/Counter Board</b>														
TMC-10	-	-	-	-	-	-	-	-	●	-	-	●	-	









## Option Table for Digital I/O Daughter Boards




Model	External Power Input (Relay Coil Voltage)		Cable Option			Without DIN-Rail Mount	With DIN- Rail Mount (/DIN)	Remarks			
	/12 V	/24 V	CA-5015	CA-3710	CA-2010			/DIN			
DB-24R	✓	✓	✓	-	-	-	✓	✓	Example:  <b>1. DB-24PRD/24V/DIN:</b> DB-24PRD, with 24 V Coil Voltage, 37-pin D-sub Cable and DIN-Rail Mounting.  <b>2. DB-24PR/12/DIN:</b> DB-24PR, with 12 V Coil Voltage, 50-pin Flat Cable and DIN-Rail Mounting.  <b>3. DB-16P8R/D/DIN:</b> DB-16P8R, with 37-pin D-sub Cable and DIN-Rail Mounting.		
DB-24RD	-	-	-	✓	-	-	✓	✓			
DB-24PR	✓	✓	✓	-	-	✓	✓	✓			
DB-24PRD	✓	✓	-	✓	-	-	✓	✓			
DB-24C	-	-	✓	-	✓	✓	✓	✓			
DB-24SSR	-	-	✓	-	✓	-	✓	✓			
DB-24POR	-	-	✓	-	✓	✓	✓	✓			
DB-16P8R	-	-	✓	-	✓	✓	✓	✓			
DB-24P	-	-	✓	-	-	-	✓	✓			
DB-24PD	-	-	-	✓	-	-	✓	✓			



## Option Table for Daughter Boards

Model	1 Meter Cable	2 Meter Cable	Without DIN-Rail Mount		With DIN-Rail Mount		Remarks		
	-	/2	-	/N	-	/DIN			
DB-8225	✓	✓	✓	-	-	✓	Example:  <b>1. DN-37/N:</b> DN-37 without DIN-Rail Mounting.  <b>2. DB-1825/2/DIN:</b> DB-1825, with 37-pin D-sub Cable (2 m) and DIN-Rail Mounting.		
DB-1825	✓	✓	✓	-	-	✓			
DB-8325	✓	✓	-	-	-	-			
DB-8425	-	-	✓	-	-	✓			
DN-20	✓	-	-	✓	✓	-			
DN-25	✓	-	-	✓	✓	-			
DN-37	✓	✓	-	✓	✓	-			
DN-50	✓	-	-	✓	✓	-			
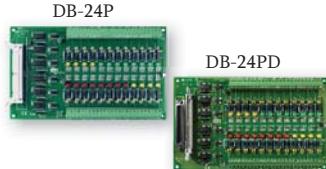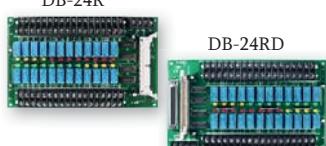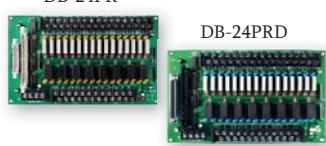
<b>DB-32R</b>	<b>32-channel Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 32-channel Relay Output (Form A)</li><li>◎ LED Indicator for Relay Status</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	<ul style="list-style-type: none"><li>◎ The DB-32R uses a DB37 Connector to control 32 Form A Relay channels for use with PISO-C64 and ISO-C64 Boards.</li></ul>	
<b>DB-16P16R</b>	<b>16-channel Input Terminal and 16-channel Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 16-channel Digital Input (Pin-to-Pin)</li><li>◎ 16-channel Relay Output (Form A)</li><li>◎ LED Indicator for Relay Status</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	<ul style="list-style-type: none"><li>◎ The DB-16P16R uses a DB37 Connector to control 16 Form A Relay channels and a 16-channel Input Terminal for use with PISO-P32C32 and ISO-P32C32 Boards.</li></ul>	
<b>DB-16P</b>	<b>16-channel Bi-directional Isolated Input Board</b>	<ul style="list-style-type: none"><li>◎ 16-channel Optically-isolated Input</li><li>◎ AC/DC Signal Input</li><li>◎ AC Signal Input with Filter</li></ul>	<ul style="list-style-type: none"><li>◎ Input Buffer with Voltage Comparators</li><li>◎ 3000 V Isolation Voltage</li><li>◎ Input Status LED Indicators</li></ul>	
<b>DB-24P/DB-24PD</b>	<b>24-channel Bi-directional Isolated Input Board</b>	<ul style="list-style-type: none"><li>◎ 24-channel Optically-isolated Input</li><li>◎ AC/DC Signal Input</li><li>◎ AC Signal Input with Filter</li><li>◎ Input Buffer with Voltage Comparators</li></ul>	<ul style="list-style-type: none"><li>◎ 3000 V Isolation Voltage</li><li>◎ Input Status LED Indicators</li><li>◎ DB-24PD includes one CA-3710 Cable</li><li>◎ DB-24P includes one CA-5015 Cable</li></ul>	
<b>DB-16R</b>	<b>16-channel Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 16 Form C Relay Output Channels</li><li>◎ Relay Output Status LED Indicators</li></ul>	<ul style="list-style-type: none"><li>◎ Screw Terminals for easy Field Wiring</li></ul>	
<b>DB-24R/DB-24RD</b>	<b>24-channel Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 24 Form C Relay Output Channels</li><li>◎ Relay Output Status LED Indicators</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	<ul style="list-style-type: none"><li>◎ DB-24R includes one CA-5015 Cable</li><li>◎ DB-24RD includes one CA-3710 Cable</li></ul>	
<b>DB-24PR/DB-24PRD</b>	<b>24-channel Power Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 8 Form C Relay Output Channels</li><li>◎ 16 Form A Relays Output Channels</li><li>◎ Relay Output Status LED Indicators</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	<ul style="list-style-type: none"><li>◎ Built-in Varistors protect the Input Channels from being damaged by External High-voltage Spikes</li></ul>	
<b>DB-24C</b>	<b>24-channel Open-collector Output Board</b>	<ul style="list-style-type: none"><li>◎ 24 Open-collector Output Channels (NPN)</li><li>◎ Max. Load Voltage: 30 V<sub>DC</sub></li><li>◎ Max. Load Current: 600 mA/Channel</li></ul>	<ul style="list-style-type: none"><li>◎ Output Status LED Indicators</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	
<b>DB-24OD</b>	<b>24-channel Open-drain Output Board</b>	<ul style="list-style-type: none"><li>◎ 24-channel Open-drain Output</li><li>◎ Max. Load Current: 400 mA/Channel</li><li>◎ Max. Load Voltage: 35 V<sub>DC</sub></li></ul>	<ul style="list-style-type: none"><li>◎ Output Status LED Indicators</li></ul>	
<b>DB-24POR</b>	<b>24-channel PhotoMos Relay Output Board</b>	<ul style="list-style-type: none"><li>◎ 24 Form A PhotoMos Relay Output Channels</li><li>◎ Switch up to 0.13 A @ 350 V<sub>AC</sub> (Max.)</li><li>◎ 5 V<sub>DC</sub> Logic Level</li></ul>	<ul style="list-style-type: none"><li>◎ 5000 V Optical Isolation</li><li>◎ Relay Output Status LED Indicators</li><li>◎ Screw Terminals for easy Field Wiring</li></ul>	
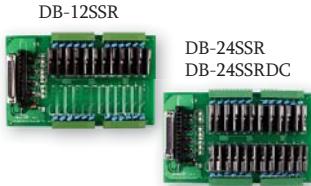
<b>DB-3R</b>	<b>Daughterboard for WDT-03</b>	
◎ 3-channel Relay Output (Form A) ◎ 3-channel Digital Input	◎ The DB-3R is equipped with one DB9 connector and 3 Relay Output Channels	
<b>DB-16P8R</b>	<b>16-channel Isolated Digital Input and 8-channel Relay Output Board</b>	
◎ 16 OPTO-isolated Digital Input Channels ◎ 8 Form C Relay Output channels (SPDT) ◎ Switch up to 5 A @ 250 V <sub>AC</sub> /30 V <sub>DC</sub> ◎ Input and Output Status LED Indicators	◎ Voltage Input or Dry Contact Input Mode ◎ Optional Varistors protect the Input Channels from being damaged by External High-voltage Spikes ◎ Screw Terminals for easy Field Wiring	
<b>DB-12SSR/DB-24SSR/DB-24SSRDC</b>	<b>12/24-channel Solid-state (AC/DC) Relay Output Board</b>	
◎ DB-12SSR/DB-24SSR: <ul style="list-style-type: none"><li>● 12/24 Form A Solid-state (AC) Relay Output Channels</li><li>● Switch up to 4 A @ 250 V<sub>AC</sub></li><li>● 5 V<sub>DC</sub> Logic Level</li><li>● 2500 V Optical Isolation</li></ul>	◎ DB-24SSRDC: <ul style="list-style-type: none"><li>● 24 Form A Solid-state (DC) Relay Output Channels</li><li>● Switch up to 4 A @ 50 V<sub>DC</sub></li><li>● Relay Output Status LED Indicators</li><li>● Screw Terminals for easy Field Wiring</li></ul>	
<b>DB-889D</b>	<b>16-channel Analog Multiplexer Board</b>	
◎ 16-channel Differential Analog Input ◎ Input Filtering ◎ Connects directly to A-82x and PCI-1800 Series Boards	◎ Cold-junction Compensation for Thermocouples, Thermocouple Open Detection Daisy chain up to eight DB-889D Daughter Boards	
<b>DB-1825</b>	<b>Daughterboard for PCI-1802 with 1 Meter DB37 Cable</b>	
◎ 32 Single-ended/16 Differential ◎ Screw Terminal Board using a DB37 Connector for PEX/PCI-1202, PCI-1602, PCI-1802, PCI-822 and PCI-826 Series Boards	◎ Blank Pads for Break Detection, Low-pass Filter, Current Shut and Voltage Attenuation	
<b>DB-8025</b>	<b>Daughterboard with two 20-pin Flat Cables</b>	
◎ Two 20-pin Box Header Connectors	◎ Blank Pads for Break Detection, Low-pass Filter, Current Shut and Voltage Attenuation	
<b>DB-8125</b>	<b>Daughterboard with 1 m DB37 Cable</b>	
◎ Screw Terminal Board using two 20-pin Cable Connectors or one DB37 Connector	◎ Blank Pads for Break Detection, Low-pass Filter, Current Shut and Voltage Attenuation	
<b>DB-8225</b>	<b>Daughterboard for A-82x/PCI-1800 Series with 1 m DB37 Cable</b>	
◎ 16 Single-ended/8 Differential Input Channels ◎ Blank Pads for Break Detection, Low-pass Filter, Current Shut and Voltage Attenuation	◎ Onboard Cold-junction Circuit on AI Channel 1 (Single-ended or Differential) ◎ Includes one DB37 Connector for A-82x and PCI-1800 Series Boards	
<b>DB-8325</b>	<b>Daughterboard with 1 m DB37 Cable</b>	
◎ The DB-8325 includes one DB37 Connector for ISO-813 or PISO-813 Series Boards	◎ Blank Pads for Break Detection, Low-pass Filter, Current Shut and Voltage Attenuation	

**DB-8425**

## Daughterboard for PISO-DA2U with 1.5 m DB9 Cable

- ◎ Pin-to-Pin Screw Terminal for PISO-DA2U Boards
- ◎ Screw Terminals for easy Field Wiring with DB9 Connector

**DB-37**

## Direct Connection Board

- ◎ Pin-to-Pin Screw Terminal for any I/O Board that uses a DB37 Connector

**ADP-20/ADP-37/ADP-50**

## Connector Extender

- ◎ ADP-20: 20-pin to 20-pin Connector Extender for PCI/ISA Board and includes one CA-2002 Cable
- ◎ ADP-37: 50-pin OPTO-22 Connector to Female DB37 Connector Extender for PCI/ISA Board and include one CA-5002 Cable
- ◎ ADP-50: 50-pin to 50-pin Connector Extender for PCI/ISA Board and include one CA-5002 Cable

**DN-09-2/DN-09-2F**

## I/O Connector Block with DIN-Rail Mounting and two DB9 Male Headers

- ◎ Two Male DB9 Connectors
- ◎ DN-09-2 includes two CA-0915 Cables
- ◎ DN-09-2F includes two CA-0910F Cables
- ◎ Pitch: 5.08 m/m
- ◎ Pin-to-Pin Screw Terminal

**DN-20/DN-20-381**

## I/O Connector Block with DIN-Rail Mounting and two 20-pin Headers

- ◎ Two 20-pin Headers
- ◎ Includes one CA-2010 Cable
- ◎ Pin-to-Pin Screw Terminal
- ◎ Pitch:
- DN-20: 5.08 mm
- DN-20-381: 3.81 mm

**DN-25**

## I/O Connector Block with DIN-Rail Mounting and DB9/DB25 Connector

- ◎ One DB9 Connector
- ◎ One DB25 Connector
- ◎ Includes one CA-0920 Cable and one CA-2520 Cable
- ◎ Pin-to-Pin Screw Terminal
- ◎ Pitch: 5.08 mm

**DN-37/DN-37-381**

## I/O Connector Block with DIN-Rail Mounting and DB37 Connector

- ◎ DN-37 contains two DB37 Connectors
- ◎ DN-37-381 contains one DB37 Connector
- ◎ Pin-to-Pin Screw Terminal
- ◎ Includes one CA-3710 DB37 Cable
- ◎ Pitch:
- DN-37: 5.08 mm
- DN-37-381: 3.81 mm

**DN-50/DN-50-381**

## I/O Connector Block with DIN-Rail Mounting and 50-pin Header

- ◎ One 50-pin Header
- ◎ Pin-to-Pin Screw Terminal
- ◎ Includes one CA-5015 Cable
- ◎ Pitch:
- DN-50: 5.08 mm
- DN-50-381: 3.81 mm

**DN-68A**

## I/O Connector Block with DIN-Rail Mounting and 68-pin SCSI II Header

- ◎ One 68-pin SCSI II Female Connector
- ◎ Screw Terminals for easy Field Wiring
- ◎ Pin-to-Pin Screw Terminal

**DN-100**

## I/O Connector Block with DIN-Rail Mounting and 100-pin SCSI II Header

- ◎ One 100-pin SCSI II Female Connector
- ◎ Screw Terminals for easy Field Wiring
- ◎ Pitch: 3.81 mm
- ◎ Pin-to-Pin Screw Terminal
- ◎ DN-100-CA includes one CA-SCSI100-15 Cable



## 6-2 Accessories and Cables


2-pin	9-pin	CA-0910N	CA-0915	CA-0920
CA-0205	CA-0910F			
2-pin Black and Red Cable Length: 0.5 m	DB9 Female-to-Female Cable Length: 1 m	DB9 Female-to-Female Null Modem Cable Length: 1 m	DB9 Male-to-Female Cable Length: 1.5 m	DB9 Male-to-Male Cable Length: 2 m

CA-0909	CA-PC09F	CA-PC09M	20-pin	CA-2010
CA-0909	CA-PC09F	CA-PC09M	CA-2002	CA-2010
DB9 Female-to-Female Connector	DB9 Female Connector with Plastic Cover	DB9 Male Connector with Plastic Cover	Two 20-pin Flat Cables for ADP-20 and ADP-20/PCI Length: 20 cm	20-pin Flat Cable Length: 1 m

CA-2020	CA-20006	25-pin	CA-2520D	37-pin
CA-2020	CA-20006	CA-2520	CA-2520D	CA-3710
20-pin Flat Cable Length: 2 m	Two 20-pin Flat Cables Pitch: 2.0 mm Length: 6 cm	DB25 Male-to-Male Cable Length: 2 m (45°)	DB25 Male-to-Male Cable Length: 2 m (180°)	DB37 Male-to-Male Cable Length: 1 m (45°)

CA-3710D	CA-3720	CA-3720D	CA-3710DM	CA-3730DM
CA-3710D	CA-3720	CA-3720D	CA-3710DM	CA-3730DM
DB37 Male-to-Male Cable Length: 1 m (180°)	DB37 Male-to-Male Cable Length: 2 m (45°)	DB37 Male-to-Male Cable Length: 2 m (180°)	Thin Monolithic DB37 Male-to-Male Cable (RoHS) Length: 1 m (180°)	Thin Monolithic DB37 Male-to-Male Cable (RoHS) Length: 3 m (180°)

CA-3750DM	CA-3705A	CA-3710A	CA-3715A	CA-4002
 <p>Thin Monolithic DB37 Male-to-Male Cable (RoHS) Length: 5 m (180°)</p>	 <p>DB37 Male-to-Female Cable Length: 0.5 m</p>	 <p>DB37 Male-to-Female Cable Length: 1 m</p>	 <p>DB37 Male-to-Female Cable Length: 1.5 m</p>	 <p>DB37 Male Connector with Plastic Cover</p>

40-pin		50-pin		
CA-4002F	CA-4037B	CA-4037W	CA-5002	CA-5015
 <p>DB37 Female Connector with Plastic Cover</p>	 <p>40-pin Flat to DB37 Female Cable for PISO-DIO Series Cards Length: 24 cm</p>	 <p>40-pin Flat to DB37 Female Cable for PCI-DIO/ISO-DIO Series Cards Length: 24 cm</p>	 <p>50-pin Flat Cable Length: 20 cm</p>	 <p>50-pin Flat Cable Length: 1.5 m</p>

68-pin		100-pin		
CA-SCSI15	CA-SCSI15-H	CA-SCSI30	CA-SCSI50	CA-SCSI100-15
 <p>68-pin SCSI-II Male-to-Male Cable Length: 1.5 m</p>	 <p>68-pin SCSI-II Male-to-Male Cable Length: 1.5 m</p>	 <p>68-pin SCSI-II Male-to-Male Cable Length: 3 m</p>	 <p>68-pin SCSI-II Male-to-Male Cable Length: 5 m</p>	 <p>100-pin SCSI-II Male-to-Male Cable Length: 1.5 m</p>






## PAC 9000 Series

- AXP/ALX-9000 Series
- XP-9000-WEST/  
XP-9000-IoT/  
LX-9000/LP-9000 Series
- e-9K Series Module
- I-9K Series Module
- 2000 Series PAC
- iBPC Series BoxPC
- Touch Monitor



## IIoT Products

- IIoT Cloud Management Software (IoTstar)
- IIoT Edge Controller (WISE-5231 Series)
- IP Camer (iCAM Series)
- IIoT Communication Server (UA-5200 Series)
- MQTT I/O Module (MQ-7200 Series)
- Stack Light Monitoring Module (tSL Series)

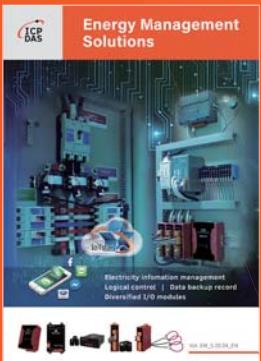

## Energy Management Solutions

- InduSoft SCADA
- Power Meter Concentrator
- IIoT PMC with Display
- Three-phase Smart Power Meter
- Single-phase Smart Power Meter
- Multi-circuit Smart Power Meter
- True RMS Input Module
- Smart Power Meter with LED Display




## Wireless Solution

- WLAN Products
- Radio Modems
- 3G/4G Products
- NB-IoT Solution
- GPS Products
- Bluetooth LE Converters
- ZigBee Products
- Infrared Wireless Modules
- Wireless Modbus Data Concentrators
- WLS (Wireless Locating System)




## Intelligent IIoT Edge Controller & I/O Module

- WISE IIoT Edge Controller &
- I/O Module
- Cloud Management
- Applications
- Product Specification
- Intelligent Surveillance Solution

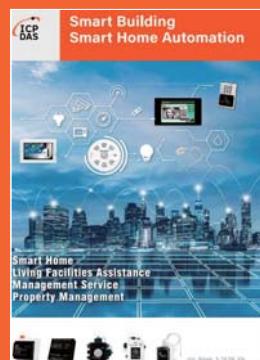

## Smart Building, Smart Home Automation

- Video Intercom & Access Control
- Touch HMI - TouchPAD Series
- Smart Lighting Control
- Energy Saving - PM/PMC Series
- Environmental - DL/CL Series
- Motion Detector - PIR Series
- Wi-Fi Wireless - WF Series
- Infrared Wireless - IR Series
- ZigBee Wireless - ZT Series
- IIoT Server & Concentrator
- LED Display - iKAN Series

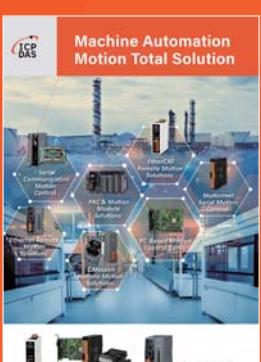

## Machine Automation Motion Total Solutions

- PC-Based Remote Motion Solutions
- PC-Based Motion Control Cards
- PAC Solutions
- Accessories



## Touch HMI Solutions - TouchPAD

- TPD/VPD Products Series
- Video Intercom & Access Control Series
- TPD/VPD Applications



泓格科技股份有限公司  
Headquarters in Taiwan (Hsinchu)  
+886-3-597-3366

ICP DAS CO., LTD.  
Headquarters in China (Shanghai)  
021-62471722/23/24

ICP  
DAS  
[www.icpdas.com](http://www.icpdas.com)